

**2 to 6 W audio power amplifier****TDA1011**

The TDA1011 is a monolithic integrated audio amplifier circuit in a 9-lead single in-line (SIL) plastic package. The device is especially designed for portable radio and recorder applications and delivers up to 4 W in a 4  $\Omega$  load impedance. The device can deliver up to 6 W into 4  $\Omega$  at 16 V loaded supply in mains-fed applications. The maximum permissible supply voltage of 24 V makes this circuit very suitable for d.c. and a.c. apparatus, while the very low applicable supply voltage of 3,6 V permits 6 V applications. Special features are:

- single in-line (SIL) construction for easy mounting
- separated preamplifier and power amplifier
- high output power
- thermal protection
- high input impedance
- low current drain
- limited noise behaviour at radio frequencies

**QUICK REFERENCE DATA**

Supply voltage range	$V_P$		3,6 to 20 V
Peak output current	$I_{OM}$	max.	3 A
Output power at $d_{tot} = 10\%$			
$V_P = 16\text{ V}; R_L = 4\ \Omega$	$P_o$	typ.	6,5 W
$V_P = 12\text{ V}; R_L = 4\ \Omega$	$P_o$	typ.	4,2 W
$V_P = 9\text{ V}; R_L = 4\ \Omega$	$P_o$	typ.	2,3 W
$V_P = 6\text{ V}; R_L = 4\ \Omega$	$P_o$	typ.	1,0 W
Total harmonic distortion at $P_o = 1\text{ W}; R_L = 4\ \Omega$	$d_{tot}$	typ.	0,2 %
Input impedance			
preamplifier (pin 8)	$ Z_i $	>	100 k $\Omega$
power amplifier (pin 6)	$ Z_i $	typ.	20 k $\Omega$
Total quiescent current	$I_{tot}$	typ.	14 mA
Operating ambient temperature	$T_{amb}$		-25 to + 150 °C
Storage temperature	$T_{stg}$		-55 to +150 °C

**PACKAGE OUTLINE**

9-lead SIL; plastic (SOT110B); SOT110-1; 1996 July 23.

# 2 to 6 W audio power amplifier

# TDA1011

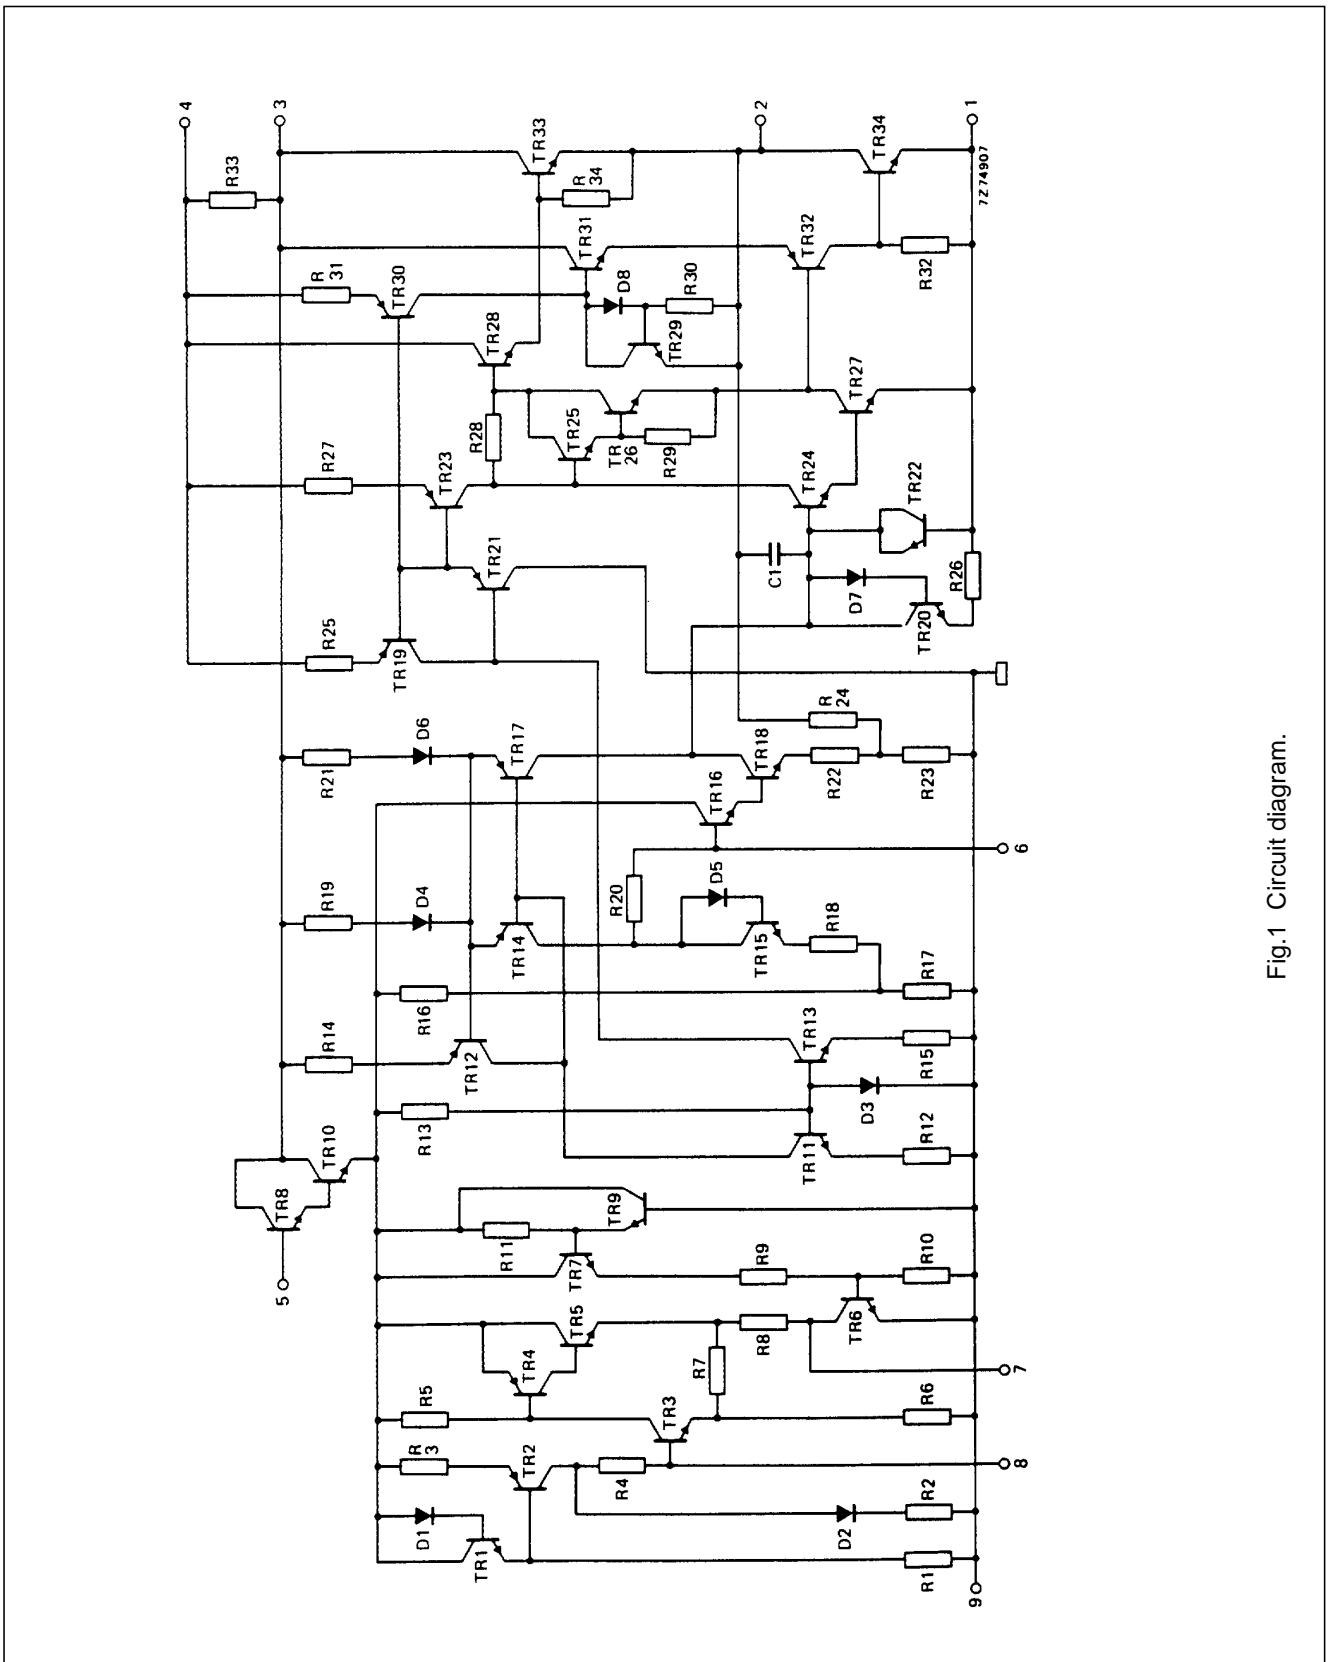


Fig.1 Circuit diagram.

2 to 6 W audio power amplifier

TDA1011

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage	$V_P$	max.	24 V
Peak output current	$I_{OM}$	max.	3 A
Total power dissipation	see derating curve Fig.2		
Storage temperature	$T_{stg}$	-55 to + 150 °C	
Operating ambient temperature	$T_{amb}$	-25 to + 150 °C	
A.C. short-circuit duration of load during sine-wave drive; $V_P = 12 V$	$t_{sc}$	max.	100 hours

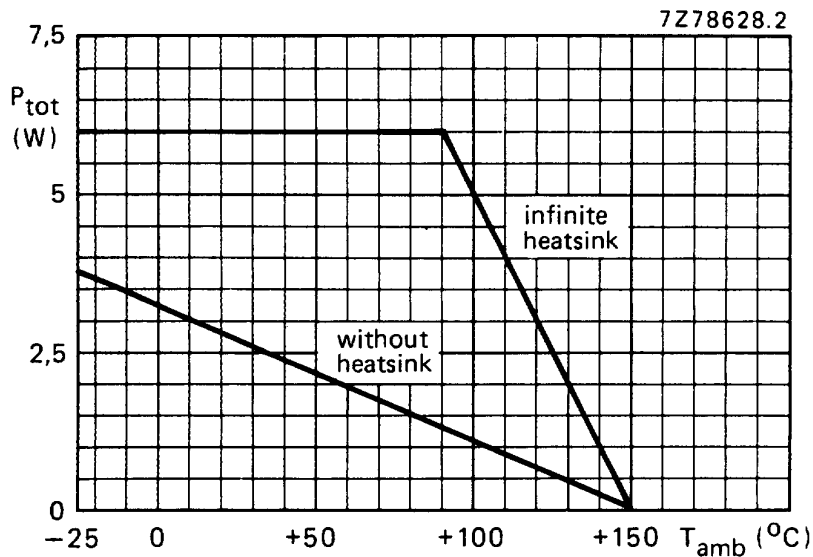


Fig.2 Power derating curve.

**HEATSINK DESIGN**

Assume  $V_P = 12 V$ ;  $R_L = 4 \Omega$ ;  $T_{amb} = 60 \text{ }^\circ\text{C}$  maximum;  $P_o = 3,8 W$ .

The maximum sine-wave dissipation is 1,8 W.

The derating of 10 K/W of the package requires the following external heatsink (for sine-wave drive):

$$R_{th j-a} = R_{th j-tab} + R_{th tab-h} + R_{th h-a} = \frac{150 - 60}{1,8} = 50 \text{ K/W.}$$

Since  $R_{th j-tab} = 10 \text{ K/W}$  and  $R_{th tab-h} = 1 \text{ K/W}$ ,  $R_{th h-a} = 50 - (10 + 1) = 39 \text{ K/W}$ .

## 2 to 6 W audio power amplifier

TDA1011

**D.C. CHARACTERISTICS**

Supply voltage range	$V_P$	3,6 to 20 V
Repetitive peak output current	$I_{ORM}$	< 2 A
Total quiescent current at $V_P = 12$ V	$I_{tot}$	typ. 14 mA
		< 22 mA

**A.C. CHARACTERISTICS**

$T_{amb} = 25$  °C;  $V_P = 12$  V;  $R_L = 4$   $\Omega$ ;  $f = 1$  kHz unless otherwise specified; see also Fig.3.

A.F. output power at  $d_{tot} = 10\%$  (note 1)

with bootstrap:

$V_P = 16$  V;  $R_L = 4$   $\Omega$

$P_o$  typ. 6,5 W

$V_P = 12$  V;  $R_L = 4$   $\Omega$

$P_o$  > 3,6 W  
typ. 4,2 W

$V_P = 9$  V;  $R_L = 4$   $\Omega$

$P_o$  typ. 2,3 W

$V_P = 6$  V;  $R_L = 4$   $\Omega$

$P_o$  typ. 1,0 W

without bootstrap:

$V_P = 12$  V;  $R_L = 4$   $\Omega$

$P_o$  typ. 3,0 W

Voltage gain:

preamplifier (note 2)

$G_{v1}$  typ. 23 dB  
21 to 25 dB

power amplifier

$G_{v2}$  typ. 29 dB  
27 to 31 dB

total amplifier

$G_{v\ tot}$  typ. 52 dB  
50 to 54 dB

Total harmonic distortion at  $P_o = 1,5$  W

$d_{tot}$  typ. 0,3 %  
< 1 %

Frequency response; -3 dB (note 3)

B 60 Hz to 15 kHz

Input impedance:

preamplifier (note 4)

$|Z_{i1}|$  > 100 k $\Omega$   
typ. 200 k $\Omega$

power amplifier

$|Z_{i2}|$  typ. 20 k $\Omega$

Output impedance preamplifier

$|Z_{o1}|$  typ. 1 k $\Omega$

Output voltage preamplifier (r.m.s. value)

$d_{tot} < 1\%$  (note 2)

$V_{o(rms)}$  > 0,7 V

Noise output voltage (r.m.s. value; note 5)

$R_S = 0$   $\Omega$

$V_{n(rms)}$  typ. 0,2 mV

$R_S = 10$  k $\Omega$

$V_{n(rms)}$  typ. 0,6 mV  
< 1,4 mV

Noise output voltage at  $f = 500$  kHz (r.m.s. value)

B = 5 kHz;  $R_S = 0$   $\Omega$

$V_{n(rms)}$  typ. 8  $\mu$ V

2 to 6 W audio power amplifier

TDA1011

Ripple rejection (note 6)

f = 1 to 10 kHz

f = 100 Hz; C2 = 1 μF

RR typ. 42 dB

RR > 35 dB

Bootstrap current at onset of clipping; pin 4 (r.m.s. value)

I<sub>4(rms)</sub> typ. 35 mA

Notes

1. Measured with an ideal coupling capacitor to the speaker load.
2. Measured with a load resistor of 20 kΩ.
3. Measured at P<sub>o</sub> = 1 W ; the frequency response is mainly determined by C1 and C3 for the low frequencies and by C4 for the high frequencies.
4. Independent of load impedance of preamplifier.
5. Unweighted r.m.s. noise voltage measured at a bandwidth of 60 Hz to 15 kHz (12 dB/octave).
6. Ripple rejection measured with a source impedance between 0 and 2 kΩ (maximum ripple amplitude: 2 V).
7. The tab must be electrically floating or connected to the substrate (pin 9).



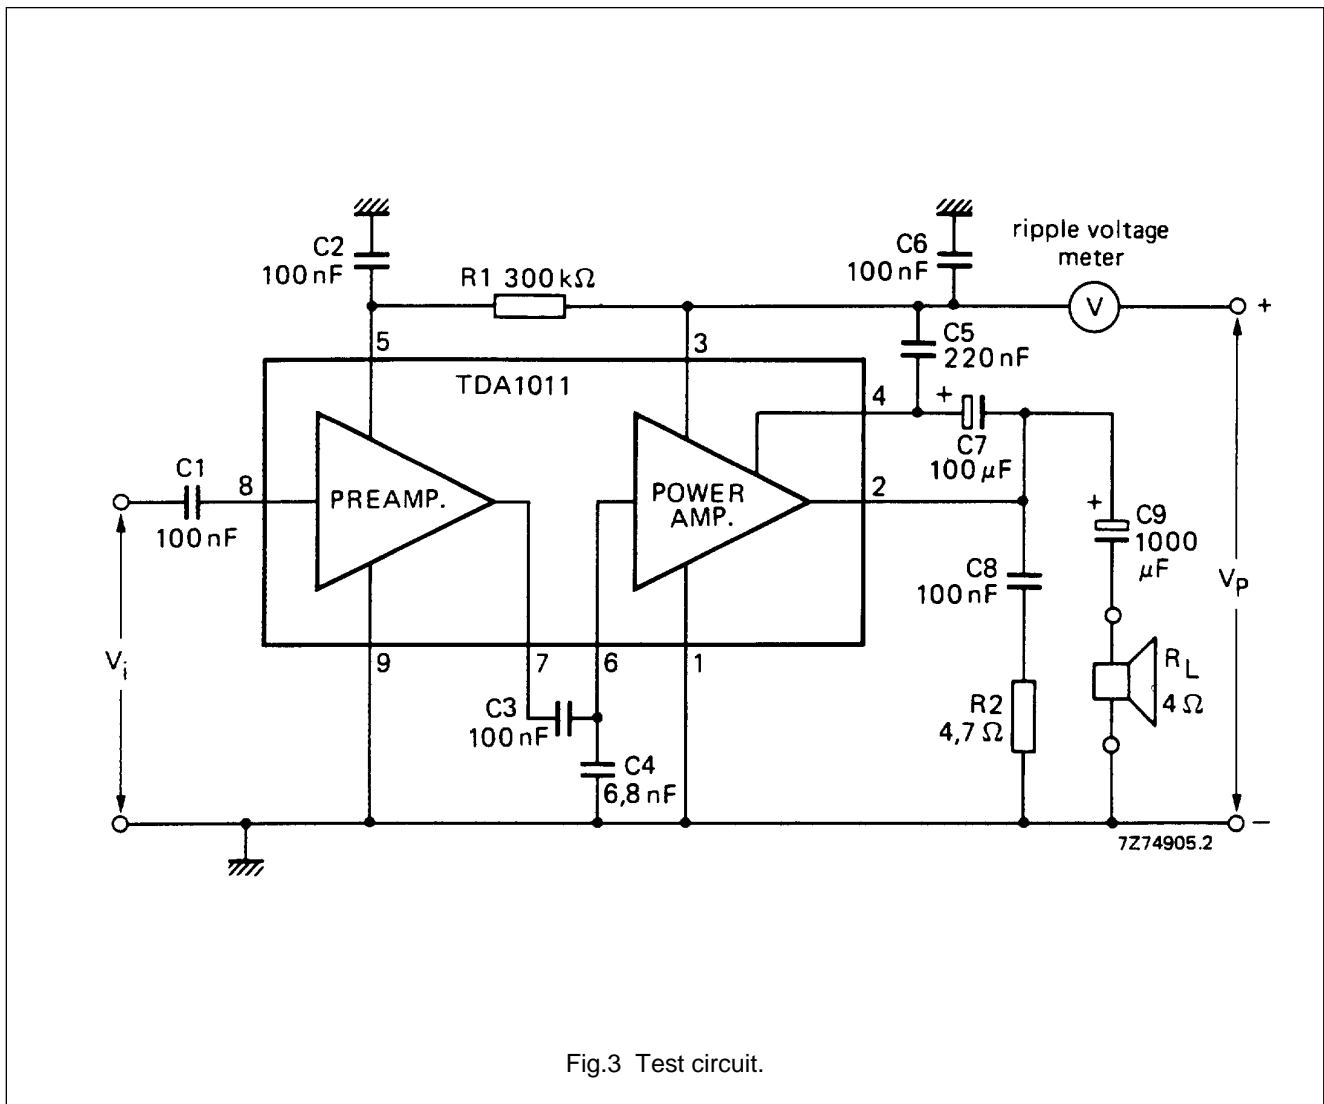


Fig.3 Test circuit.

2 to 6 W audio power amplifier

TDA1011

APPLICATION INFORMATION

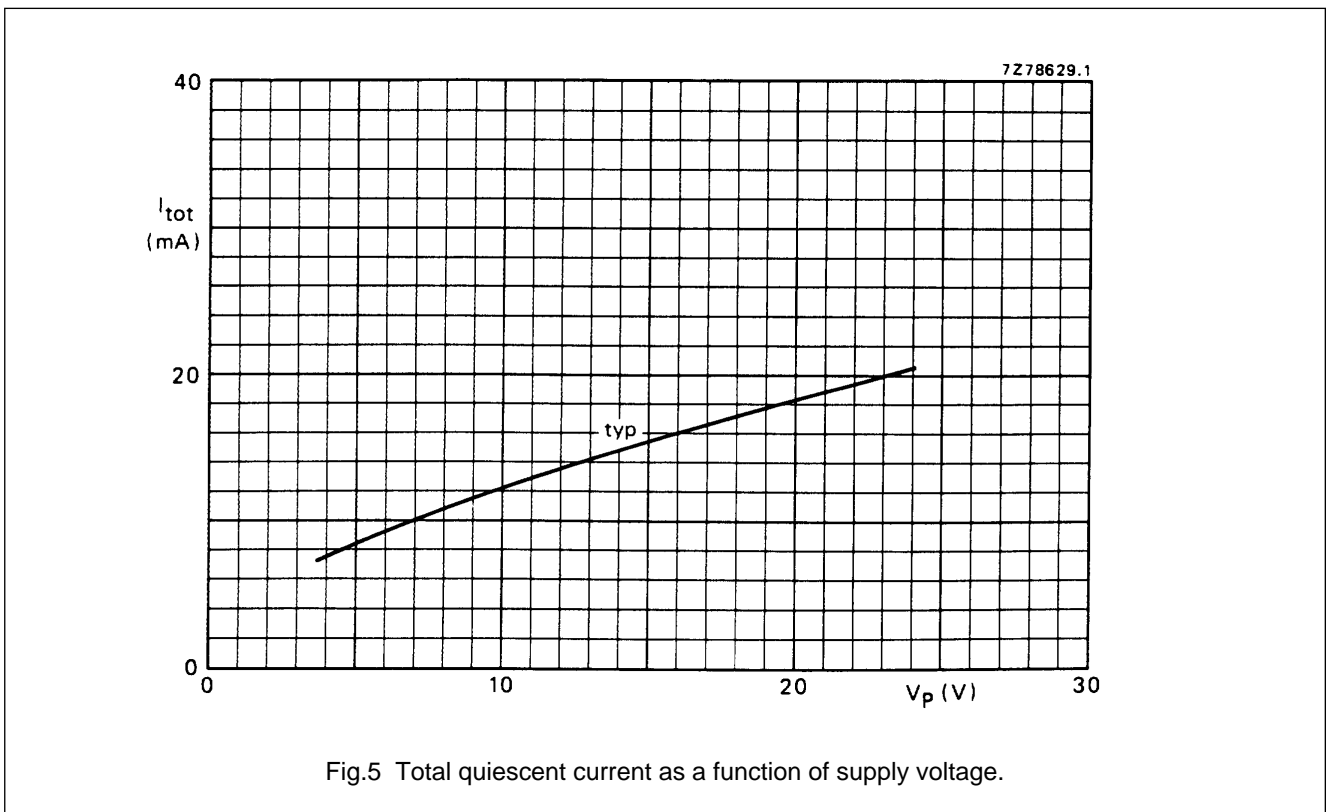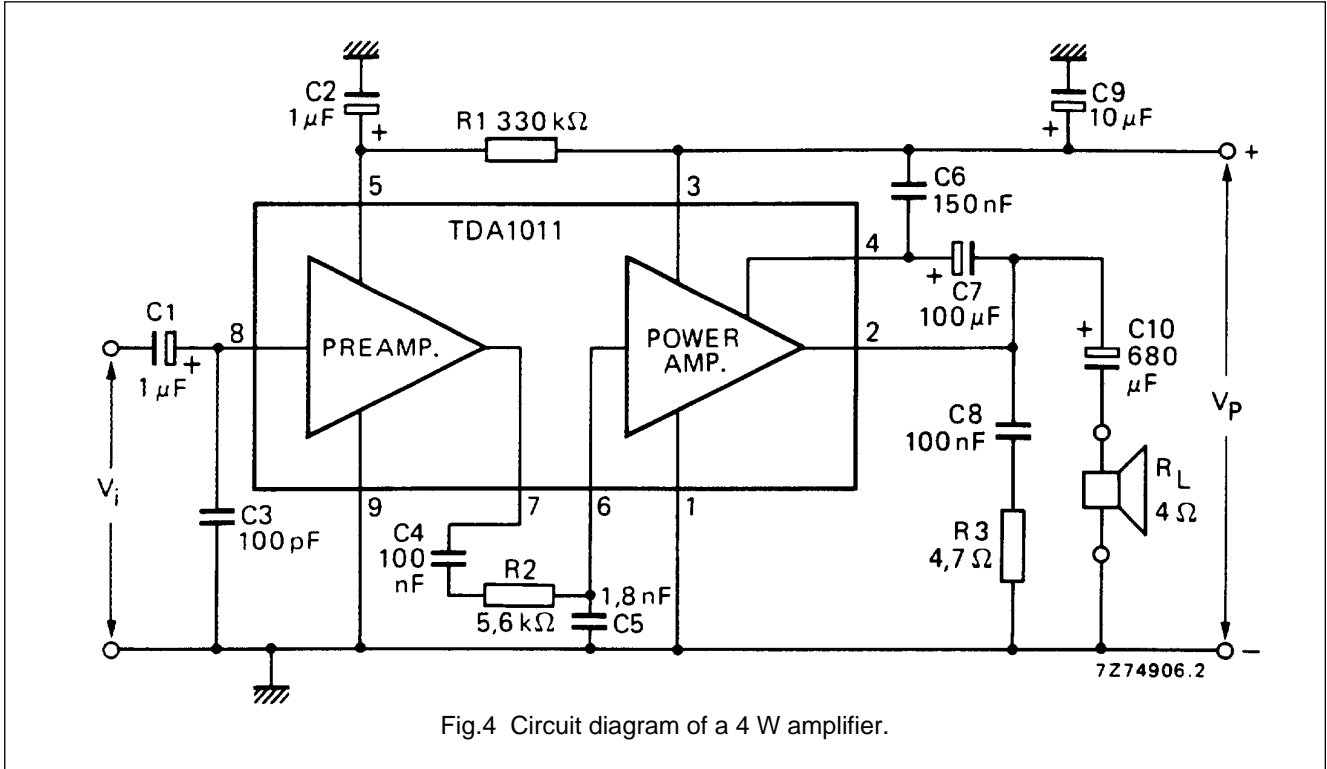

2 to 6 W audio power amplifier

TDA1011

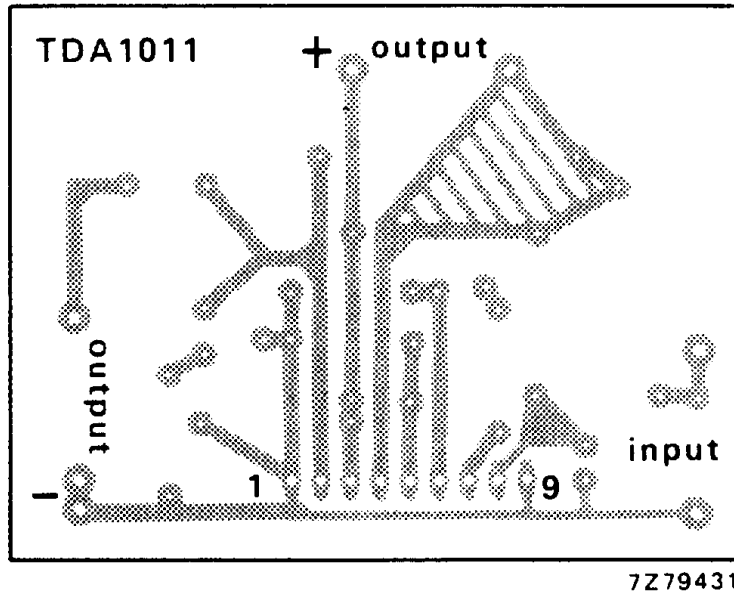


Fig.6 Track side of printed-circuit board used for the circuit of Fig.4; p.c. board dimensions 62 mm × 48 mm.

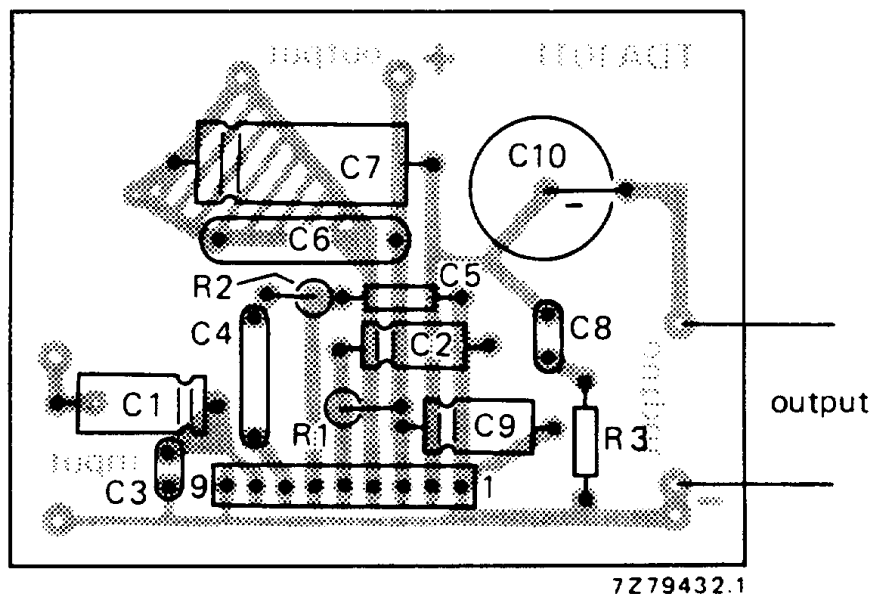


Fig.7 Component side of printed-circuit board showing component layout used for the circuit of Fig.4.

2 to 6 W audio power amplifier

TDA1011

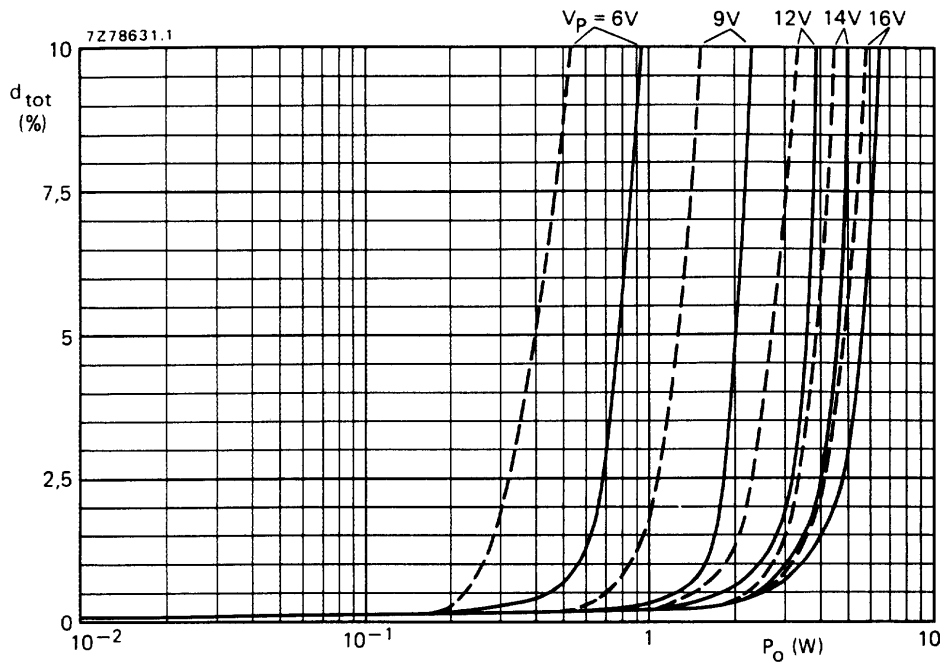


Fig.8 Total harmonic distortion as a function of output power across  $R_L$ ; \_\_\_\_\_ with bootstrap; --- without bootstrap;  $f = 1$  kHz; typical values. The available output power is 5% higher when measured at pin 2 (due to series resistance of C10).

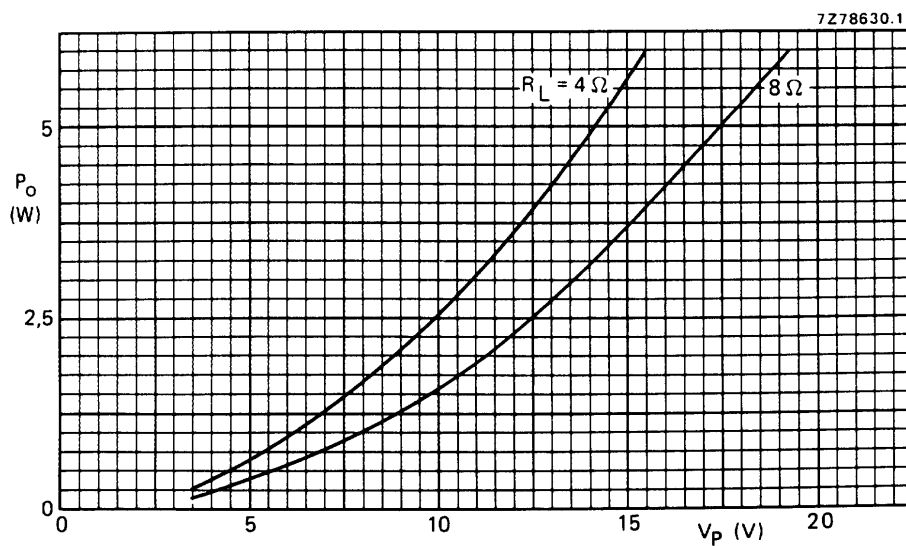


Fig.9 Output power across  $R_L$  as a function of supply voltage with bootstrap;  $d_{tot} = 10\%$ ; typical values. The available output power is 5% higher when measured at pin 2 (due to series resistance of C10).

2 to 6 W audio power amplifier

TDA1011

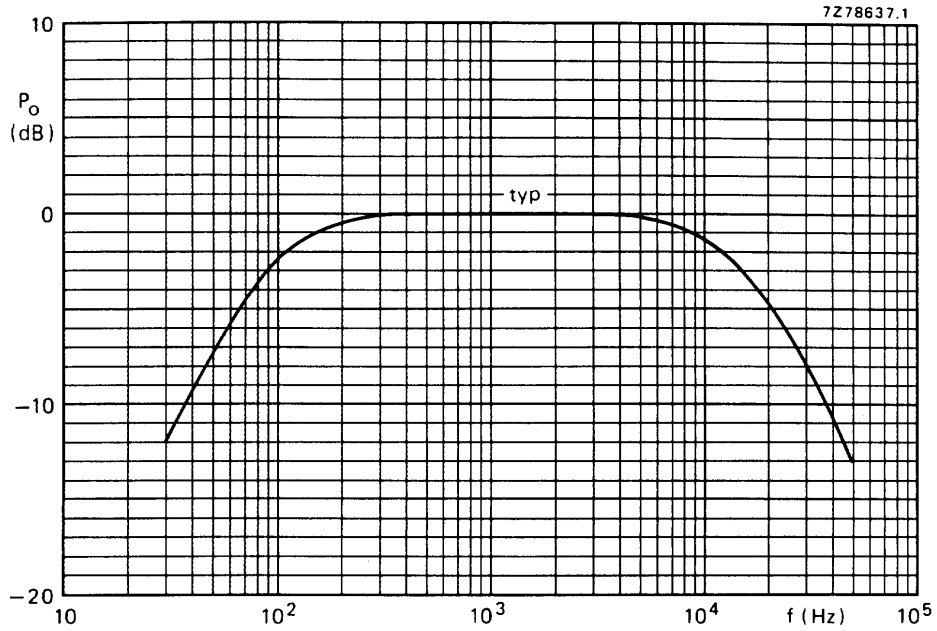


Fig.10 Voltage gain as a function of frequency;  $P_o$  relative to 0 dB = 1 W;  $V_p = 12$  V;  $R_L = 4 \Omega$ .

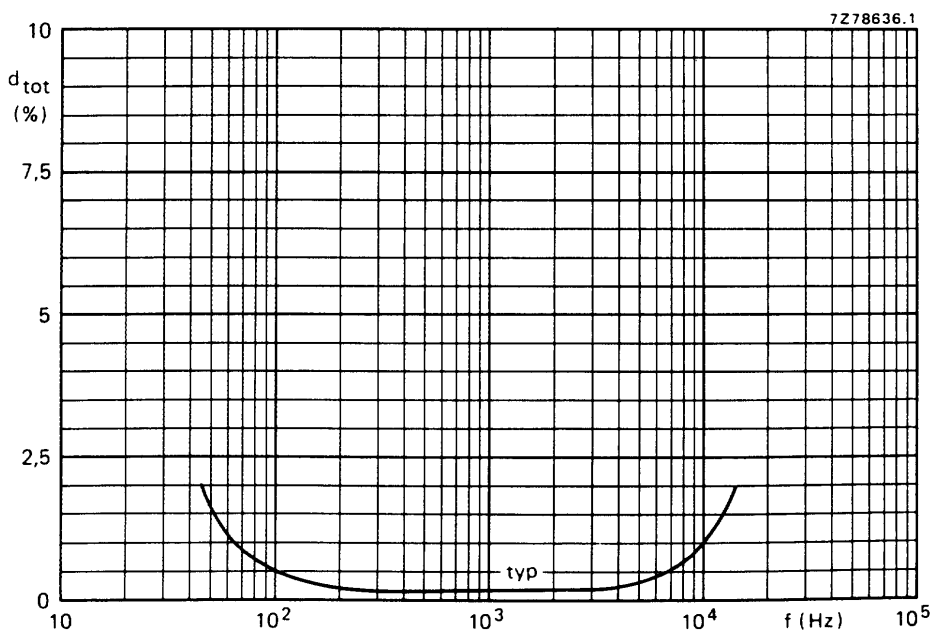


Fig.11 Total harmonic distortion as a function of frequency;  $P_o = 1$  W;  $V_p = 12$  V;  $R_L = 4 \Omega$ .

2 to 6 W audio power amplifier

TDA1011

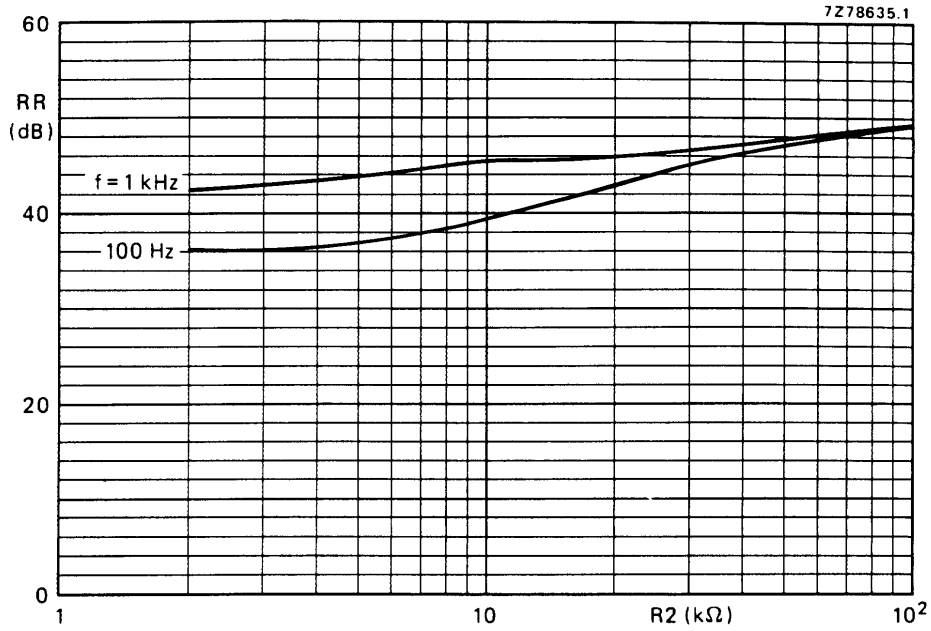


Fig.12 Ripple rejection as a function of R2 (see Fig.4);  $R_S = 0$ ; typical values.

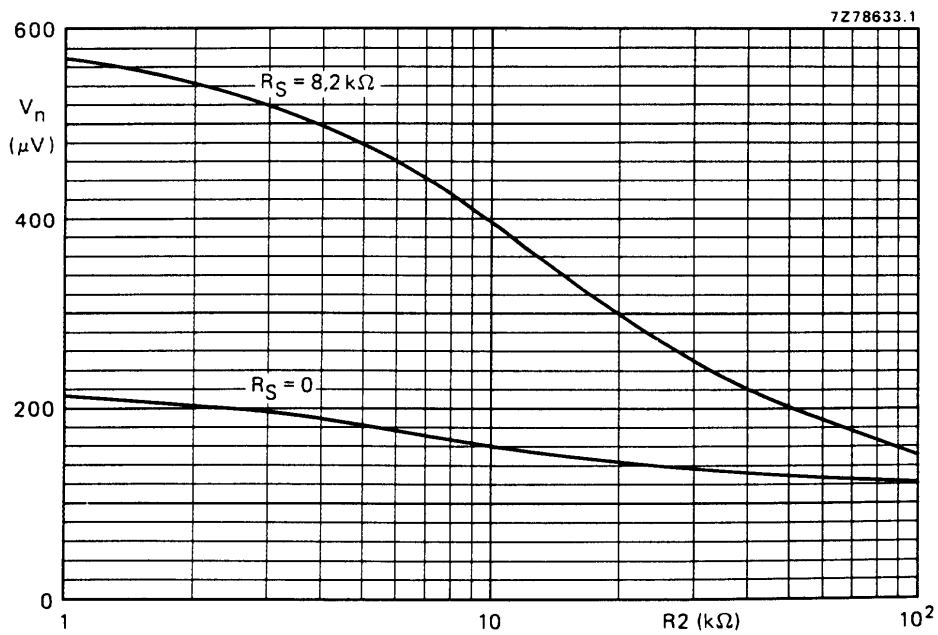


Fig.13 Noise output voltage as a function of R2 (see Fig.4); measured according to A-curve; capacitor C5 is adapted for obtaining a constant bandwidth.

2 to 6 W audio power amplifier

TDA1011

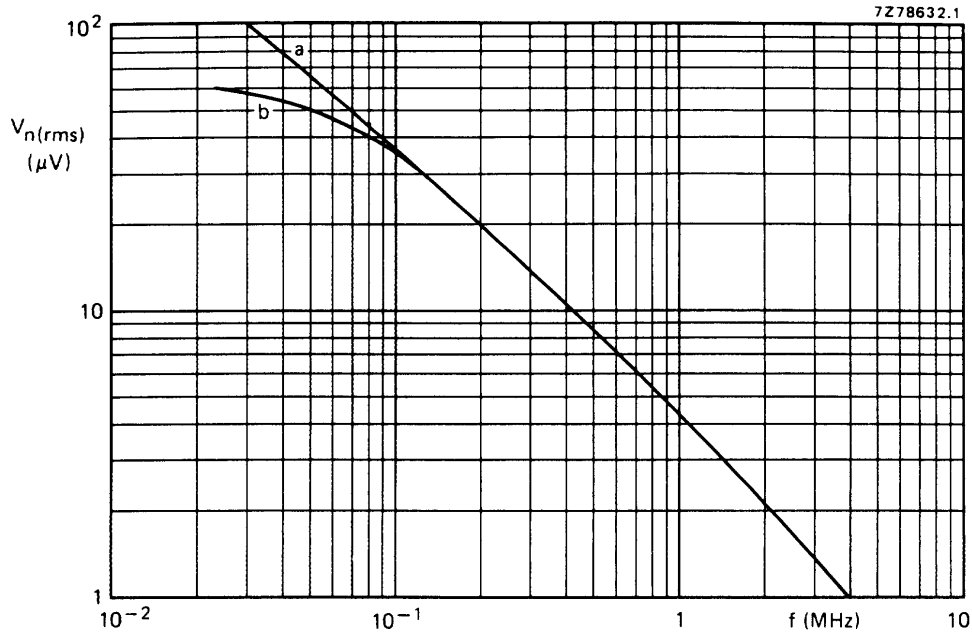


Fig.14 Noise output voltage as a function of frequency; curve a: total amplifier; curve b: power amplifier; B = 5 kHz;  $R_S = 0$ ; typical values.

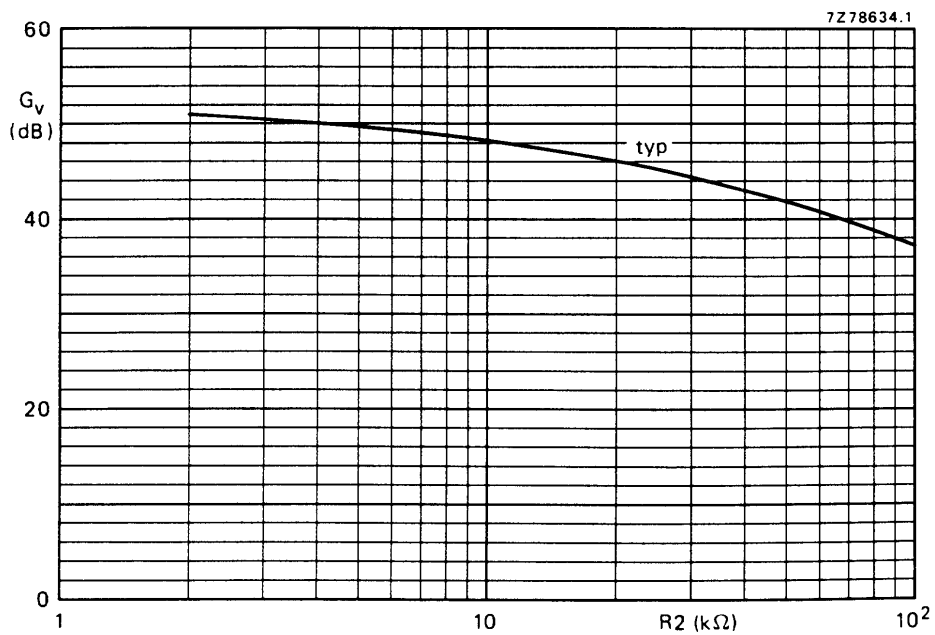


Fig.15 Voltage gain as a function of R2 (see Fig.4).


2 to 6 W audio power amplifier

TDA1011

PACKAGE OUTLINE

SIL9MPF: plastic single in-line medium power package with fin; 9 leads

SOT110-1

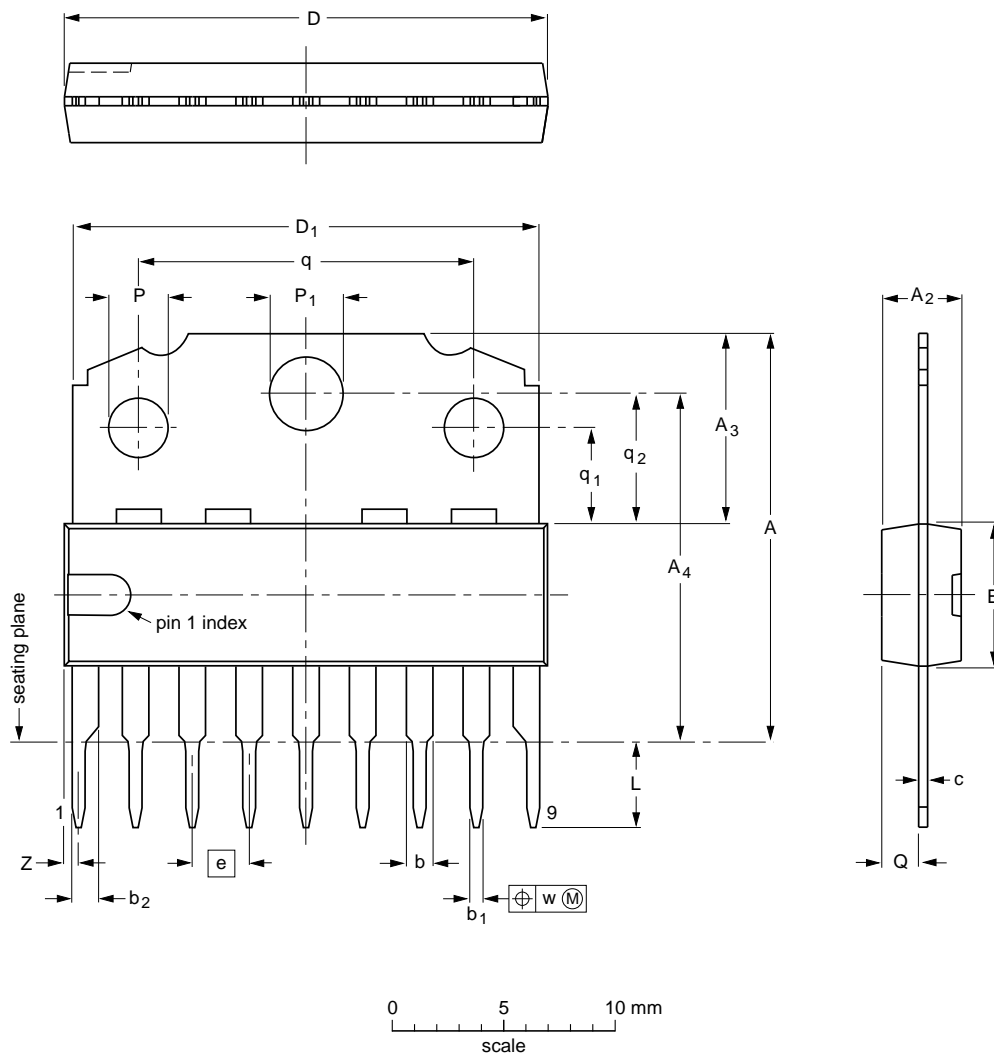

DIMENSIONS (mm are the original dimensions)

UNIT	A	A <sub>2</sub> max.	A <sub>3</sub>	A <sub>4</sub>	b	b <sub>1</sub>	b <sub>2</sub>	c	D <sup>(1)</sup>	D <sub>1</sub>	E <sup>(1)</sup>	e	L	P	P <sub>1</sub>	Q	q	q <sub>1</sub>	q <sub>2</sub>	w	Z <sup>(1)</sup> max.
mm	18.5 17.8	3.7	8.7 8.0	15.8 15.4	1.40 1.14	0.67 0.50	1.40 1.14	0.48 0.38	21.8 21.4	21.4 20.7	6.48 6.20	2.54	3.9 3.4	2.75 2.50	3.4 3.2	1.75 1.55	15.1 14.9	4.4 4.2	5.9 5.7	0.25	1.0

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT110-1						92-11-17 95-02-25