MASTECH®



CATALOGUE 2024

MGL®

MEASURING INSTRUMENTS CATALOGUE

CONTENT INDEX

2	WHO IS MGL
3	ABOUT MASTECH
4	FAST SELECTION CHARTS
29	DIGITAL MULTIMETERS
97	DIGITAL CLAMP METERS
135	AC LINE SPLITTERS
139	ELECTRICAL TESTERS
149	CIRCUIT TESTERS
155	CIRCUIT ANALYZERS
160	WIRE & CABLE TESTERS
166	LCR METERS
172	EARTH RESISTANCE
178	INSULATION TESTERS
184	PAT TESTER
186	THERMOMETERS
198	ENVIRONMENTAL METERS
218	ACCESSORIES

WHO IS MGL




We are a global group of companies operating locally. We manufacture test and measurement products for the electrical and automotive industry, from the entry level through high tech products.
Our companies work globally, serving our customers worldwide. This global network delivers a deeper understanding of each individual market, with solutions tailored to the unique requirements of each customer.

With customers over 20 years old, our goal is to be a recognized, honest and fair company. We aim to be the most valued partner for our customers in the research, development, manufacture and supply of innovative, modern and customer-focused technologies.

We have a highly experienced team which is openminded, receptive to new ideas and adaptive to evolving market trends. This solid foundation guarantees that we are well informed and fully equipped to deliver excellent solutions to meet our customers' real needs.

BRANDING CHANNELS

We manufacture electrical test and measurement instruments under our own brands: Mastech, KPS, C-Logic and Power Probe, recognized brands and market leaders in the fields of electrical measurement and automotive. All of our products have a professional positioning based on advanced balanced technology and they are marketed through local distributors throughout the world. We maintain direct and close contact with our distributors, through our offices around the world, and we support them in their business by offering technical advice and an after-sales service for our products.

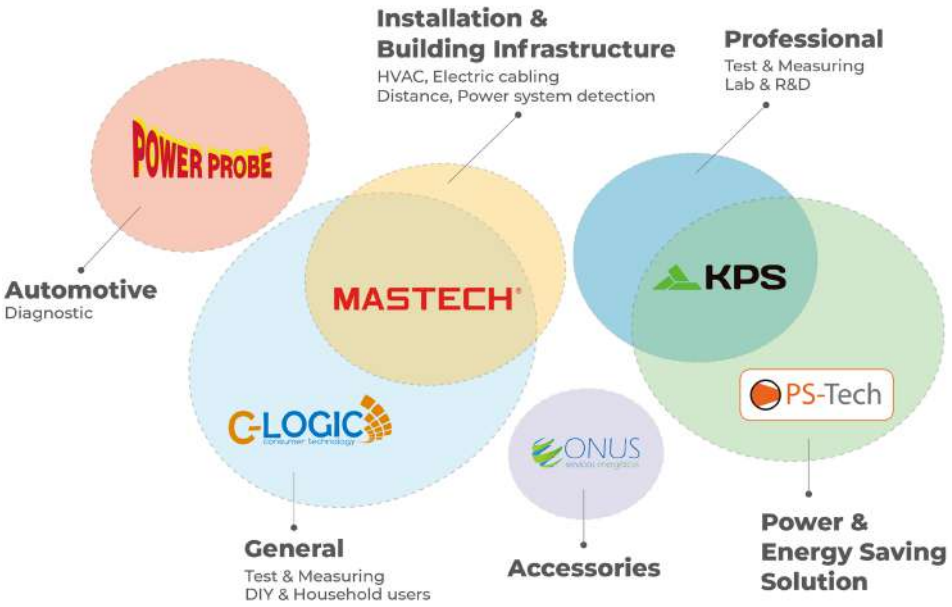

MASTECH®

At MASTECH we focus on providing the highest quality, innovative measuring instruments for the electrical market, along with the best service to our customers.

From digital multimeters and clamp meters to voltage testers, plug testers and all ranges of environmental testers, our producto families have been developed to meet the requirements of the construction, DIY and industrial sectors.

Test and measurement equipment:

I. For industrial environments: we develop a range of measuring instruments with specific features and high precision, ensuring reliability and accuracy.

II. For the residential sector: MASTECH instruments meet all requirements relating to measuring and testing of electrical values, enabling safety checks on installations and appliances in homes and other buildings.

III. For environmental measurement, MASTECH offers a wide range of solutions, with measuring instruments for temperature, moisture and wind speed to light, sound, gas and distance.



DIGITAL MULTIMETERS
MANUAL RANGING

CAT II CAT III CAT IV								
Model	M3900	M830B	M830BZ	M832	M838	MAS830	MAS830B	MAS830L
Page	30	31	32	33	34	35	36	37
Safety Rating	CAT II 1000V CAT III 600V	CAT II 600V	CAT II 600V	CAT II 600V	CAT II 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	2000	2000	2000	2000	2000	2000	2000
Auto Ranging								
Auto Power Off								
True RMS								
DC Voltage	1000V	600V	600V	600V	600V	600V	600V	600V
AC Voltage	750V	600V	600V	600V	600V	600V	600V	600V
DC Current	10A	10A	10A	10A	10A	10A	10A	10A
AC Current	10A							
Resistance	20MΩ	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ
Capacitance								
Frequency								
Duty Cycle								
Type K Temparature					-20~1370°C			
Battery Test								
Diode	•	•	•	•	•	•	•	•
Continuity	•		•	•	•	•		•
Display Backlight								•
Work Light								•
Data Hold						•		•
NCV								
Inductance								
hFE Transistor	•	•		•	•			•
Dual Display								
MAX								
MAX/MIN								
MAX/MIN/AVG								
Relative Measurement								
Peak Measurement								
DWELL Test								
TACH Test								

DIGITAL MULTIMETERS
MANUAL RANGING

CAT II CAT III CAT IV								
Model	MAS838	MS8233A	MS8233B	MS8233C	MS8238	MS8261	MS8264	MS8269
Page	38	39	40	41	42	43	44	445
Safety Rating	CAT II 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V
Display Counts	2000	2000	2000	2000	2000	2000	2000	2000
Auto Ranging								
Auto Power Off						•	•	•
True RMS								
DC Voltage	600V	600V	600V	600V	600V	1000V	1000V	1000V
AC Voltage	600V	600V	600V	600V	600V	750V	750V	750V
DC Current	10A	10A	10A	10A	10A	10A	10A	10A
AC Current						10A	10A	10A
Resistance	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ	200MΩ	200MΩ	20MΩ
Capacitance						20μF	20μF	20μF
Frequency							20kHz	
Duty Cycle								
Type K Temparature	-20~1000°C			-20~1000°C -4~1832°F			-20~1000°C	-20~1000°C
Battery Test					•			
Diode	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•
Display Backlight			•	•		•	•	
Work Light								
Data Hold	•	•	•	•		•	•	•
NCV			•	•				
Inductance								20H
hFE Transistor						•	•	•
Dual Display								
MAX								
MAX/MIN								
MAX/MIN/AVG								
Relative Measurement								
Peak Measurement								
DWELL Test								
TACH Test								

DIGITAL MULTIMETERS

MANUAL RANGING

CAT II CAT III CAT IV								
Model	MS8301A	MS8301B	MS8321A	MS8321D	MS8360C	MS8360E	MY60	MY61
Page	46	47	48	49	50	51	52	53
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT II 1000V CAT III 600V	CAT III 600V	CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V
Display Counts	2000	4000	2000	2000	2000	2000	2000	2000
Auto Ranging	•	•						
Auto Power Off	•	•	•	•	•	•	•	•
True RMS								
DC Voltage	600V	600V	600V	1000V	600V	600V	1000V	1000V
AC Voltage	600V	600V	600V	750V	600V	600V	700V	700V
DC Current		10A	10A	20A	10A	10A	10A	10A
AC Current	10A	10A	10A	20A	10A	10A	10A	10A
Resistance	2MΩ	40MΩ	20MΩ	20MΩ	200MΩ	200MΩ	200MΩ	200MΩ
Capacitance		100μF			200μF	200μF		100μF
Frequency		10kHz			20kHz			
Duty Cycle								
Type K Temparature		-4~1832°F			-20~1000°C -4~1832°F			
Battery Test	•							
Diode	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•
Display Backlight		•			•	•		
Work Light		•						
Data Hold	•	•	•	•	•	•	•	•
NCV		•			•	•		
Inductance						20H		
hFE Transistor			•	•			•	•
Dual Display								
MAX								
MAX/MIN								
MAX/MIN/AVG								
Relative Measurement								
Peak Measurement								
DWELL Test								
TACH Test								

DIGITAL MULTIMETERS

MANUAL RANGING

CAT II CAT III CAT IV							
Model	MY62	MY63	MY64	MY65	MY70	MY74	MY75
Page	54	55	56	57	58	59	60
Safety Rating	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	2000	2000	20000	2000	2000	20000
Auto Ranging							
Auto Power Off	•	•	•	•	•	•	•
True RMS							
DC Voltage	1000V	1000V	1000V	1000V	600V	600V	600V
AC Voltage	750V	750V	750V	700V	600V	600V	600V
DC Current	10A	10A	10A	10A	10A	10A	10A
AC Current	10A	10A	10A	10A	10A	10A	10A
Resistance	200MΩ	200MΩ	200MΩ	200MΩ	200MΩ	200MΩ	200MΩ
Capacitance	100μF	100μF	100μF	100μF		100μF	200nF
Frequency		2kHz	20kH	20kHz		20kHz	20kHz
Duty Cycle							
Type K Temparature	-20~1000°C		-20~1000°C			-20~1000°C	
Battery Test							
Diode	•				•	•	•
Continuity	•	•	•	•	•	•	•
Display Backlight							
Work Light							
Data Hold	•	•	•	•	•	•	•
NCV							
Inductance							
hFE Transistor	•	•	•	•	•	•	
Dual Display							
MAX							
MAX/MIN							
MAX/MIN/AVG							
Relative Measurement							
Peak Measurement							
DWELL Test							
TACH Test							

DIGITAL MULTIMETERS
AUTO RANGING

CAT II
CAT III
CAT IV

NEW









Model	MS820L	MS8217	MS8221C	MS8233D	MS8233E	MS8238H	MS8239C
Page	61	62	63	64	65	66	67
Safety Rating	CAT II 600V CAT III 300V	CAT II 1000V CAT III 600V	CAT II 600V	CAT II 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	4000	2000	2000	2000	4000	4000
Auto Ranging		•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•	•
True RMS						•	
DC Voltage	500V	1000V	600V	600V	600V	600V	600V
AC Voltage	500V	1000V	600V	600V	600V	600V	600V
DC Current	10A	10A	10A	10A	10A	10A	10A
AC Current		10A	10A	10A	10A	10A	10A
Resistance	200MΩ	40MΩ	20MΩ	20MΩ	20MΩ	40MΩ	40MΩ
Capacitance		100μF	1000μF				100μF
Frequency		100kHz	400Hz	20kHz			10kHz
Duty Cycle							•
Type K Temparature		-55~1000°C	-20~1000°C		-20~1000°C -4~1832°F	-20~1000°C -4~1832°F	-20~1000°C -4~1832°F
Battery Test						•	
Diode		•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•
Display Backlight				•	•		•
Work Light							
Data Hold	•	•		•	•	•	•
NCV				•	•	•	
Inductance							
hFE Transistor			•				
Dual Display							
MAX				•	•		
MAX/MIN							
MAX/MIN/AVG							
Relative Measurement		•					
Peak Measurement							
Low Pass Filter							
AC/DC Current (For Clamp)							
Low Impedance							
Bar Graph							
Interface						Wireless	

DIGITAL MULTIMETERS
AUTO RANGING

CAT II CAT III CAT IV							
Model	MS8250A	MS8250D	MS8251A	MS8251B	MS8268	MS8301D	MS8332C
Page	68	69	70	71	72	73	74
Safety Rating	CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT II 1000V CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	4000	6600	6600	6600	4000	6000	4000
Auto Ranging	•	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•	•
True RMS		•		•			
DC Voltage	600V	1000V	1000V	1000V	1000V	600V	600V
AC Voltage	600V	1000V	1000V	1000V	750V	600V	600V
DC Current	10A	10A	10A	10A	10A		400mA
AC Current	10A	10A	10A	10A	10A		400mA
Resistance	40MΩ	66MΩ	66MΩ	66MΩ	40MΩ	10MΩ	40MΩ
Capacitance	100μF	66mF	66mF	66mF	200μF		100μF
Frequency	5MHz	66MHz	66MHz	10kHz	200kHz	3kHz	5MHz
Duty Cycle	•	•	•	•	•	•	•
Type K Temparature			0~1000°C 32~1832°F	0~1000°C 32~1832°F			
Battery Test							
Diode	•	•	•	•	•		•
Continuity	•	•	•	•	•	•	•
Display Backlight	•	•	•	•	•	•	•
Work Light							
Data Hold	•	•	•	•	•	•	•
NCV	•	•	•	•		•	•
Inductance							
hFE Transistor					•		
Dual Display		•	•	•		•	
MAX							
MAX/MIN		•	•	•		•	
MAX/MIN/AVG							
Relative Measurement	•	•	•	•	•		
Peak Measurement							
Low Pass Filter							
Sound & Light Warning					•		
Low Impedance				•			
Bar Graph				•			
Interface		USB					

DIGITAL MULTIMETERS
AUTO RANGING

CAT II CAT III CAT IV						
Model	MS8340A	MS8360F	MS8360G	MS8361D	MY68	MY78
Page	75	76	77	78	79	80
Safety Rating	CAT III 1000V	CAT III 600V	CAT III 600V	CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V
Display Counts	6000	4000	4000	4000	4000	4000
Auto Ranging	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•
True RMS				•		
DC Voltage	1000V	600V	600V	600V	1000V	600V
AC Voltage	750V	600V	600V	600V	700V	600V
DC Current	10A	10A	10A	10A	10A	10A
AC Current	10A	10A	10A	10A	10A	10A
Resistance	60MΩ	40MΩ	40MΩ	40MΩ	40MΩ	40MΩ
Capacitance	400μF	200μF	4000μF	99.99mF	200μF	200μF
Frequency	10MHz	10MHz	10MHz	10kHz	100kHz	200kHz
Duty Cycle	•	•	•	•		•
Type K Temparature	-10~700°C 14~1292°F		-20~1000°C -4~1832°F			
Battery Test						
Diode	•	•	•	•	•	•
Continuity	•	•	•	•	•	•
Display Backlight	•	•	•	•		
Work Light						
Data Hold	•	•	•	•	•	•
NCV		•	•	•		
Inductance						
hFE Transistor				•	•	•
Dual Display						
MAX						
MAX/MIN	•		•			
MAX/MIN/AVG						
Relative Measurement	•	•	•	•		•
Peak Measurement						
Low Pass Filter	•					
AC/DC Current (For Clamp)						•
Low Impedance						
Bar Graph			•			
Interface				Wireless		

DIGITAL MULTIMETERS
POCKET/PEN TYPE

CAT II CAT III CAT IV							
Model	M300	M320	MS8333A	MS8211	MS8211D	MS8212A	MS8223A
Page	81	82	83	84	85	86	87
Safety Rating	CAT II 600V CAT III 300V	CAT II 600V CAT III 300V	CAT III 600V	CAT II 600V	CAT II 600V	CAT III 600V	CAT III 600V
Display Counts	2000	4000	6000	2000	2000	2000	2000
Auto Ranging		•	•	•	•	•	•
Auto Power Off		•	•	•	•	•	•
True RMS			•				
DC Voltage	600V	600V	600V	600V	600V	600V	600V
AC Voltage	600V	600V	600V	600V	600V	600V	600V
DC Current	200mA	400mA	600mA		200mA	200mA	200mA
AC Current		400mA	600mA		200mA	200mA	200mA
Resistance	20MΩ	40MΩ	60MΩ	20MΩ	20MΩ	20MΩ	20MΩ
Capacitance		100μF	600μF				
Frequency		100kHz	10kHz				
Duty Cycle			•				
Type K Temparature							
Battery Test			•				
Diode	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•
Display Backlight			•				
Work Light							•
Data Hold		•	•	•	•	•	•
NCV			•	•		•	•
Inductance							
hFE Transistor							
Dual Display							
MAX				•	•	•	•
MAX/MIN							
MAX/MIN/AVG							
Relative Measurement							
Peak Measurement							
DWELL Test							
TACH Test							
Logic Level Test					•	•	•
Retractable Tip				•	•		
Double Molding						•	•

DIGITAL MULTIMETERS
BENCH TYPE

CAT II CAT III CAT IV			
Model	MS6100	MS8040	MS8050
Page	88	89	90
Safety Rating		CAT II 1000V	CAT II 1000V
Display Counts	22000	22000	53000
Auto Ranging	•	•	•
Auto Power Off		•	•
True RMS		•	•
DC Voltage		1000V	1000V
AC Voltage		750V	1000V
DC Current		10A	10A
AC Current		10A	10A
Resistance		200MΩ	50MΩ
Capacitance		20mF	5000μF
Frequency	1300MHz		
Logic Frequency		220MHz	2MHz
Linear Frequency		100kHz	200kHz
Duty Cycle		•	•
OSC. Out	10MHz		
Type K Temparature		-30~1300°C -22~2372°F	
Diode		•	•
hFE Transistor			
Continuity		•	•
Backlight		•	•
Data Hold	•	•	•
MAX/MIN/AVG		MAX/MIN	•
Relative Measurement	•	•	•
Peak Measurement		•	
Low Pass Filter	•	•	
Bar Graph		•	
DC Current (For Clamp)		220/2200A	
AC Current (For Clamp)		220/2200A	
ADP measurement			
Data Logging			30 Groups
Analysis Software			•
Interface		USB	USB

DIGITAL MULTIMETERS

SPECIAL APPLICATION

CAT II CAT III CAT IV						
Model	MS5208	MS8209	MS8229	MS8236	MS8239D	MS8265
Page	91	92	93	94	95	96
Safety Rating	CAT III 1000V CAT IV 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT II 1000V CAT III 600V
Display Counts	6600	4000	4000	2000	2000	20000
Auto Ranging	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•
True RMS	•					
DC/AC Voltage	1000V/750V	600V/600V	1000V/750V	600V/600V	600V/600V	1000V/750V
DC/AC Current	400mA/400mA	10A/10A	10A/10A	10A/10A	10A/10A	10A/10A
Resistance	66MΩ	40MΩ	40MΩ	20MΩ	40MΩ	200MΩ
Capacitance	66mF	200μF	100μF			200μF
Frequency	10kHz	200kHz	200kHz			20kHz
Duty Cycle	•	•				
Diode	•	•	•	•	•	•
Type K Temparature	-30~1300°C -22~2372°F	-20~1000°C -4~1832°F	-20~1000°C -4~1832°F			
Continuity	•	•	•	•	•	•
Display Backlight	•	•	•	•	•	•
Data Hold	•	•	•	•	•	•
NCV				•		
hFE Transistor						•
MAX				•	•	
MAX/MIN						
MAX/MIN/AVG	•					
Relative Measurement	•	•				
Low Pass Filter	•					
Insulation Test	1000V/2GΩ					
DAR/PI	•					
Relative Humidity		30~90%	20~95%			
Sound level		35~100dB	40~100dB			
Luminosity		40000Lux	4000/40000Lux			
Environment Temperature			0~40°C/32~104°F			
Cable Check				RJ11/RJ45/Tone		
Sound & Light Warning			•			•
Data Logging	100 Groups					
Interface						
DWELL/TACH Test				•		

DIGITAL CLAMP METERS

AC CURRENT

CAT II CAT III CAT IV							
Model	M266	M266C	M266F	MS2000G	MS2001	MS2001C	MS2001F
Page	98	99	100	101	102	103	104
Safety Rating	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT III 600V CAT IV 600V
Display Counts	2000	2000	2000	2000	2000	2000	2000
Jaw Size	Φ50mm 2.0"	Φ50mm 2.0"	Φ50mm 2.0"	Φ55mm 2.2"	Φ42mm 1.7"	Φ42mm 1.7"	Φ42mm 1.7"
Auto Ranging							
Auto Power Off							
True RMS							
DC Voltage	1000V	1000V	1000V	1000V	1000V	1000V	1000V
AC Voltage	750V	750V	750V	750V	750V	750V	750V
DC Current							
AC Current	1000A	1000A	1000A	2000A	1000A	1000A	1000A
Resistance	20kΩ	20MΩ	2MΩ	2MΩ	2000Ω	2000Ω	2000Ω
Capacitance							
Frequency			2kHz	20kHz			2kHz
Duty Cycle							
Type K Temparature		0~750°C 32~1382°F		0~750°C 32~1382°F		-40~750°C	
Diode			•	•	•		•
Continuity	•	•	•	•	•	•	•
Display Backlight				•	•	•	
Work Light							
Data Hold	•	•	•	•	•	•	•
NCV							
MAX/MIN							
Relative Measurement							
Bar Graph							
Insulation Test	2000MΩ	2000MΩ	2000MΩ				
DC Current (From Plug)							
Low Pass Filter							
Low Impedance							
Dual Display							
Infrared Temperature							
Interface							

DIGITAL CLAMP METERS

AC CURRENT

CAT II CAT III CAT IV							
Model	MS2008B	MS2009A	MS2009C	MS2025A	MS2025C	MS2026R	MS2028A
Page	105	106	107	108	109	110	111
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 600V	CAT III 600V
Display Counts	4000	2000	6000	6000	6600	6000	2000
Jaw Size	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"	Φ26mm 1.0"
Auto Ranging	•	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•	•
True RMS				•	•	•	•
DC Voltage	600V	600V	600V	1000V	1000V	1000V	600V
AC Voltage	600V	600V	600V	750V	750V	750V	600V
DC Current							
AC Current	600A	600A	600A	10A	1000A	1000A	600A
Resistance	40MΩ	20MΩ	60MΩ	60MΩ	66MΩ	60MΩ	20MΩ
Capacitance	100μF		60mF	100mF	66mF	4000μF	
Frequency	100kHz		1kHz	10kHz	66MHz	10kHz	
Duty Cycle			•	•	•	•	
Type K Temparature	-20~750°C		-20~1000°C -4~1832°F		-20~1000°C -4~1832°F		
Diode	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•
Display Backlight	•	•	•	•	•	•	•
Work Light		•	•	•	•	•	
Data Hold	•	•	•	•	•	•	•
NCV		•	•	•	•		
MAX/MIN		MAX		•	•	•	Max
Relative Measurement				•	•	•	
Bar Graph					•		
Insulation Test							
DC Current (From Plug)							
Low Pass Filter							
Low Impedance							
Dual Display					•		
Infrared Temperature							
Interface							

DIGITAL CLAMP METERS
AC CURRENT

DIGITAL CLAMP METERS
AC/DC CURRENT

CAT II CAT III CAT IV						
Model	MS2030	MS2030B	MS2033A	MS2101	MS2108	MS2109A
Page	112	113	114	115	116	117
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT II 1000V CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	4000	6000	4000	6000	6000
Jaw Size	Φ28mm 1.1"	Φ28mm 1.1"	Φ26mm 1.0"	Φ42mm 1.7"		Φ26mm 1.0"
Auto Ranging		•	•	•	•	•
Auto Power Off		•	•	•	•	•
True RMS						
DC Voltage	600V	600V	600V	1000V	600V	600V
AC Voltage	600V	600V	600V	750V	600V	600V
DC Current				1000A	600A	600A
AC Current	400A	600A	600A	1000A	600A	600A
Resistance	2kΩ	40MΩ	10MΩ	40MΩ	66MΩ	60MΩ
Capacitance		100μF		100μF	66mF	4000μF
Frequency		10kHz	3kHz	100kHz	1kHz	10MHz
Duty Cycle			•	•	•	•
Type K Temparature		-20~1000°C -4~1832°F		-40~750°C		-20~1000°C -4~1832°F
Diode	•	•		•	•	•
Continuity	•	•	•	•	•	•
Display Backlight		•	•		•	•
Work Light		•			•	•
Data Hold	•	•	•	•	•	•
NCV		•				•
MAX/MIN			•			•
Relative Measurement				•		•
Bar Graph						
Insulation Test						
DC Current (From Plug)						
Low Pass Filter						
Low Impedance						
Dual Display			•			
Infrared Temperature						
Interface						

DIGITAL CLAMP METERS

AC/DC CURRENT

CAT II CAT III CAT IV						
Model	MS2125A	MS2128	MS2128A	MS2138	MS2138R	MS2160
Page	118	119	120	121	122	123
Safety Rating	CAT III 1000V CAT IV 600	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 1000V CAT IV 600
Display Counts	6000	6600	4000	4000	4000	4000
Jaw Size	Φ40mm 1.6"	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"	Φ24mm 0.9"
Auto Ranging	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•
True RMS	•	•	•		•	
DC Voltage	1000V	600V	600V	600V	600V	600V
AC Voltage	750V	600V	600V	600V	600V	600V
DC Current	1000A	600A	400A	1000A	1000A	80A
AC Current	1000A	600A	400A	1000A	1000A	80A
Resistance	60MΩ	66MΩ	40MΩ	40MΩ	40MΩ	40MΩ
Capacitance	100mF	66mF	4000μF	4000μF	4000μF	40mF
Frequency	1000Hz	1000Hz	1000Hz	10kHz	10kHz	10kHz
Duty Cycle	•	•	•	•	•	•
Type K Temparature						-20~1000°C -4~1832°F
Diode	•	•	•	•	•	•
Continuity	•	•	•	•	•	•
Display Backlight	•	•	•	•	•	•
Work Light	•	•	•	•	•	•
Data Hold	•	•	•	•	•	•
NCV	•					•
MAX/MIN	•	•	•			
Relative Measurement	•		•	•	•	
Bar Graph			•	•	•	
Insulation Test						
DC Current (From Plug)						
Low Pass Filter						
Low Impedance						
Dual Display						
Infrared Temperature						
Interface						

DIGITAL CLAMP METERS
LEAKGE

DIGITAL CLAMP METERS
POWER

CAT II CAT III CAT IV					
Model	MS2006B	MS2016A	MS2203	MS2205	MS2225A
Page	124	125	126	127	128
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 1000V
Display Counts	2000	4000	9999	6000	6000
Jaw Size	Φ31mm 1.2"	Ø30mm 1.2"	Φ50mm 2.0"	Φ50mm 2.0"	Φ40mm 1.6"
Auto Ranging		•	•	•	•
Auto Power Off	•	•		•	•
True RMS		•	•	•	•
DC Voltage		600V			1000V
AC Voltage		600V	600V	600V	750V
DC Current					
AC Current	60A	150A	1000A	1000A	1000A
Resistance		40MΩ			60MΩ
Capacitance		40mF			100mF
Frequency			1000Hz	1000Hz	10kHz
Duty Cycle					•
Type K Temparature		-20~1000°C -4~1832°F			
Diode		•			•
Continuity		•			•
Display Backlight			•	•	•
Work Light					•
Data Hold	•	•	•	•	•
NCV					•
MAX/MIN		•	•		•
Relative Measurement					•
Bar Graph			•		
Active Power			600kW	600kW	750kW
Apparent Power			600kVA	600kVA	750kVA
Reactive Power			600kVAr	600kVAr	750kVAr
Power Factor			0.3~1	0.3~1	0.3~1
Active Energy			9999kWh		
Harmonic Measurement				45~65Hz	45~65Hz
Data Logging			28 Groups	100 Groups	
Interface			RS232	RS232	Wireless

DIGITAL CLAMP METERS

SPECIAL APPLICATION

CAT II CAT III CAT IV						
Model	M9912	MS2015A	MS2600	MS2601	MS3300	MS3302
Page	129	130	131	132	133	134
Safety Rating	CAT II 1000V	CAT II 1000V	CAT III 600V	CAT III 600V	CAT II 1000V	CAT II 600V
Display Counts	3200	6000	4000	6000		
Jaw Size	Φ55mm 2.2"	Φ40mm 1.6"	Φ12mm 0.5"	Φ12mm 0.5"	Φ55mm 2.2"	Φ28mm 1.1"
Auto Ranging	•		•	•		
Auto Power Off			•	•		
True RMS		•			•	
DC Voltage	750V	1000V	1000V	600V		
AC Voltage	750V	750V	700V	600V		
DC Current	1000A				1000A	
AC Current	1000A	1000A	200A	200A	1000A	400A
Inrush Curremt						
Resistance	30MΩ	60MΩ	40MΩ	60MΩ		
Capacitance		100mF	40μF	60mF		
Frequency	30kHz	10MHz	100kHz	60MHz		
Duty Cycle		•	•			
Type K Temparature				-20~400°C -4~750°F		
Diode	•	•	•	•		
Continuity	•	•	•	•		
Display Backlight	•	•	•	•		
Work Light	•	•		•		
Data Hold	•	•	•	•		
NCV		•		•		
MAX/MIN		•				
Relative Measurement			•			
Bar Graph						
Insulation Test						
DC Current (From Plug)				1000μA		
Low Pass Filter						
Low Impedance				•		
Dual Display						
Infrared Temperature						
Interface						

LINE SPLITTERS

CAT II CAT III CAT IV			
Model	MS922A	MS922D	MS922E
Page	136	137	138
Safety Rating	CAT II 600V	CAT II 600V	CAT II 600V
AC Volatge	125V	250V	250V
AC Current	15A	15A	15A
Frequency	50~60Hz	50~60Hz	50~60Hz
Feature	-Allows for easy AC Current measurements -Using a Clamp meter on 2 or 3 Wire Power Cords -Provides the Ability to Safely Measure Current without the need to cut or separate conductors -Separates the Hot/Live conductor from the Neutral and Ground -Voltage check sockets for easy power calculations		
Style	USA	EU	UK

ELECTRICAL TESTERS

CAT II CAT III CAT IV					
Model	MS6580B	MS8900	MS8900A	MS8900C	MS8902A
Page	140	141	142	143	144
Safety Rating	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V
Non Contact Volatge	12~1000V	100~240V	90~1000V	100~240V	12~1000V
Contact Volatge					
Frequency	50~60Hz	50~60Hz	50~60Hz	50~60Hz	50~500Hz
Metal Detecting					
RCD Test					
Work Light	•				
Sound & Light	•	•	•	•	•
Auto Power Off	•				•
Sensitivity adjustment	•				•
Infrared temperature	-20~330°C -4~626°F				

ELECTRICAL TESTERS

CAT II CAT III CAT IV				
Model	MS8902B	MS8907	MS8922A	MS8922B
Page	145	146	147	148
Safety Rating	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT III 600V	CAT III 400V
Non Contact Volatge	20~1000V	50~1000V		
Contact Volatge			400V	400V
Frequency	50~500Hz	50~60Hz	50~60Hz	50~60Hz
Metal Detecting	<20mm			
RCD Test		•		•
Work Light		•		
Sound & Light	•			
Auto Power Off	•			
Sensitivity adjustment	•			

CIRCUIT TESTERS

CAT II CAT III CAT IV					
Model	MS102	MS112	MS5902RT	MS5905RT	MS6860
Page	150	151	152	153	154
Safety Rating	CAT II 125V	CAT II 125V	CAT II 600V	CAT II 600V	CAT II 230V
AC Voltage	125V	400V	230V/120V	230V	230V
Socket Test	•	•	•	•	•
GFCI Test	•		TF type	TF type	
RCD Test					
Work Light			•		
NCV				•	
Buzzer & LED Instruction	•	•	•	•	•

CIRCUIT ANALYZERS

CAT II CAT III CAT IV				
Model	MS5900	MS5901	MS5908A	MS5908C
Page	156	157	158	159
Safety Rating	CAT III 600V	CAT III 600V	CAT III 300V	CAT III 600V
AC Voltage	400V	400V	190V	375V
Frequency	400Hz	400Hz	45~65Hz	45~65Hz
Motor & Phase Rotation Indicator	•	•		
Voltage Drop Current			12/15/20A	12/15/20A
Impedance measurement			>3.00Ω	>3.00Ω
GFCI Test			•	•
RCD Test			•	•
Data Hold			•	•
Backlight			•	•

WIRE & CABLE TESTERS

CAT II CAT III CAT IV					
Model	MS6810	MS6811	MS6812A	MS6813	MS6818
Page	161	162	163	164	165
Safety Rating					CAT III 300V
Auto Ranging					•
DC Voltage					12~400V
AC Voltage					12~400V
Frequency			300kHz	300kHz	125kHz
Low Battery Indicator		•			
Sensitivity Adjustable			•	•	•
Electoric Wire			•	•	•
Coaxial Cable (BNC)	•			•	
Network Cable	•	•		•	
Telephone Wire			•	•	
Backlight					•
Worklight					•
Sound & light instructions			•	•	•

LCR METERS

					
Model	MS5308	MS6013	MS8910	MS8911	MY6243
Page	167	168	169	170	171
Auto Ranging			•	•	
Auto Power Off			•	•	
Resistance	2Ω/200MΩ		300Ω/30MΩ	60Ω/20MΩ	
Capacitance	2000pF/2000μF	200pF/20mF	3nF/30mF	600pF/6mF	2nF/200μF
Inductance	2000μH~2000H			600μH/200H	2mH~2H
Diode			•		
Continuity Buzzer			•		
Auto Scanning			•	•	
Zero Adjustment		•			
LCR/DCR	•			•	
Data Hold	•		•	•	
Backlight	•				
Relative Measurement	•				
Interface	RS232				

EARTH RESISTANCE

CAT II CAT III CAT IV					
Model	MS2115A	MS2301	MS2302	MS2306	MS2308
Page	173	174	175	176	177
Safety Rating	CAT III 1000V CAT IV 600V	CAT III 150v	CAT III 300v		
Resistance	60MΩ	1200Ω	4000Ω	20kΩ	20kΩ
Measurement Voltage	AC 750V DC 1000V		AC 200V	AC 20V/48V DC 20V	AC 20V/48V DC 20V
Sensing & Inducing Current Transformer					•
Back light	•		•	•	•
Interface					USB

INSULATION TESTERS

CAT II CAT III CAT IV					
Model	MS5201	MS5202	MS5203	MS5205	MS5215
Page	179	180	181	182	183
Safety Rating	CAT II 1000V CAT III 600V	CAT II 1000V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V
Insulation Resistance	0.01MΩ~2GΩ	0.01MΩ~100GΩ	0.01MΩ~10GΩ	0.01MΩ~10GΩ	0.01MΩ~5TΩ
Output Voltage	1kV DC	2.5kV DC	1kV DC	2.5kV DC	5kV DC
Leakage Current test					1nA~3mA
Continuity Test			0.01Ω~200Ω (1mA)	0.01Ω~200Ω (1mA)	
Measurement Voltage	DC 1000V AC 700V	AC 5000V	DC 1000V AC 700V	DC 1000V AC 700V	DC 1000V AC 750V
Short Current	1.8mA		1.8mA	3mA	3mA
Temperature Test					-10~70°C
Back Light			•	•	•
Interface					USB

DIGITAL THERMOMETERS

						
Model	MS6500	MS6505	MS6511	MS6512	MS6513	MS6514
Page	187	188	189	190	191	192
Thermocouple Type	K		K.J.T.E	K.J.T.E	K.J.T.E. R.S.N	K.J.T.E. R.S.N
Temperature	-50~750°C -58~1382°F	-20~60°C -4~140°F	-200~1372°C -328~2501°F	-200~1372°C -328~2501°F	-200~1372°C -328~2501°F	-200~1372°C -328~2501°F
Injection Method	Single		Single	Dual	Single	Dual
Channel			TC	T1/T2/T1-T2	TC	T1/T2/T1-T2
Relative Humidity		0~100%				
Update Rate	500mS					
Clock		•				
MAX/MIN/AVG/DIF		MAX/MIN	•	•	•	•
Date Logging		16300 groups			1000 groups	1000 groups
Backlight		•				
Date Hold	•	•	•	•	•	•
Interface		RS232			USB	USB

INFRARED THERMOMETERS

					
Model	MS6522A	MS6522B	MS6531B	MS6531C	MS6541
Page	193	194	195	196	197
Color Display			•	•	•
IRT Temperature	-20~300°C -4~572°F	-20~500°C -4~932°F	-40~800°C -40~1472°F	-40~800°C -40~1472°F	-50~760°C -58~1400°F
Type K Temperature				-40~1080°C -40~1976°F	-50~300°C -58~572°F
Distance to Spot(D:S)	10:1	10:1	12:1	12:1	30:1
Emissivity	0.95	0.95	0.1~0.99	0.1~0.99	0.1~0.99
MAX/MIN/AVG/DIF	MAX/MIN/AVG	MAX/MIN/AVG	•	•	•
Data Logging				20 groups	100 groups
Backlight	•	•	•	•	•
Data hold	•	•	•	•	•

SOUND METERS

			
Model	MS6700	MS6701	MS6708
Page	199	200	201
Display	2000	2000	2000
Auto Ranging	•	•	•
Auto Power Off	•	•	•
Sound Level	30~130dB	30~130dB	30~130dB
Dynamic	50dB	50dB	50dB
Frequency	31.5Hz~8kHz	31.5Hz~8kHz	30Hz~8kHz
A/C Weighting	•	•	•
Data Logging		16000	
Data Hold			•
Date/Time	•	•	
Backlight	•	•	•
MAX	•	•	•
AC adapter	•	•	
AC/DC Signal output	•	•	
Interface		USB	

ANEMOMETERS

			
Model	MS6252A	MS6252B	MS6252D
Page	202	203	204
m/s	0.8~40 m/s	0.8~40 m/s	0.8~40 m/s
km/h	2.88~144 km/h	2.88~144 km/h	2.88~144 km/h
ft/s	2.62~131.2 ft/s	2.62~131.2 ft/s	2.62~131.2 ft/s
Knots	1.6~77.70 Knots	1.6~77.70 Knots	1.6~77.70 Knots
mile/h	1.8~90.00 mile/h	1.8~90.00 mile/h	1.8~90.00 mile/h
ft/m	157.5~7874 ft/m	157.5~7874 ft/m	157.5~7874 ft/m
Temperature		-10~60°C	-10~60°C
Relative Humidity		20~80%RH	20~80%RH
Ambient		•	•
Dew point		•	•
Wet Bulb		•	•
Interface		USB	Wireless

LIGHT METERS

				
Model	MS6610	MS6612	MS6612B	MS6612D
Page	205	206	207	208
Auto Ranging		•	•	•
Auto Power Off		•	•	•
Display Counts	2000	2000	2000	2000
Ranging	0~50000Lux	0~200000Lux 0~20000FC	0~200000Lux 0~20000FC 0~999900CD	0~200000Lux 0~20000FC 0~999900CD
Unit Selection	Lux	Lux/FC	Lux/FC/CD	Lux/FC/CD
Relative		•	•	•
Peak		•	•	•
MAX/MIN		•	•	•
Data Hold	•	•	•	•
Bar Graph		•	•	•
LED light source			•	•
Interface				Wireless

MOISTURE METERS




Model	MS6900	MS6900A
Page	209	210
Ranging	Wood , Brick, Plaster ...	Wood , Brick, Plaster ...
Testing Depth	5mm	5mm
Object moisture	0~60%	0~60%
Ambient TEMP	-10~50°C 14~122°F	-10~50°C 14~122°F
Sampling Rate	240mS	240mS
MAX/MIN	•	•
Unit Selection	WB, TD, °C, °F, %RH	WB, TD, °C, °F, %RH
Auxiliary Verification		•
Data Hold	•	•
Backlight	•	•

TACHOMETERS




Model	MS6208A	MS6208B
Page	211	212
Contact	50~19999	
Measurement	50~19999RPM	50~99999RPM (Non-Contact)
Measuring Distance	X	50~250mm
Auto Power Off	•	•
MAX/MIN	•	•
Data Hold	•	•
Backlight	•	•
Unit Selection	•	
Data Logging	100 Groups	100 Groups

GAS DETECTOR



Model	MS6310
Page	213
Alarm at level	10%~40%
Response Time	2 seconds
Warm up time	2 Minutes
Easy to Identify	•
Pinpoint Gas Leaks	•
Portable	•
High Sensitivity	•
Resume Original measurement	State after 7~10 min in clear air
Gas Detecred	Natural gas, Methance, Ethane, Propane

PAT TESTER

CAT II
CAT III
CAT IV



Model	MS5911
Page	185
Safety Rating	CAT II 300V
Grounding	20Ω
Insulation Resistance	20MΩ
leakage Current	10.5mA
Cord Test	•
Polarity Test	•
Power Socket Test	•
Auto Power Off	•
Data HoldBacklight	•
Data logging	300 groups

ENVIRONMENT TESTER



Model	MS6300
Page	214
Auto Ranging	•
Auto Power Off	•
Temperature	-10~60°C/14~140°F
Humidity	20~80%RH
Sound level	30~130dB
luminance	2000Lux
Wind Speed	0.5~20m/s, 1.8~72km/h 100~4000FPM, 0.9~38.9Knots
AirFlow [CMM]	0~999900
AirFlow [CFM]	0~999900
A/C Weighting	•
MAX/MIN/AVG/DIF	•
Data Hold	•
Backlight	•

DISTANCE METERS



Model	MS6404/MS6406/MS6408
Page	215
Auto Power Off	•
Distance	40m/60m/80m
Accuracy	±2.0mm
Area & Volume	•
Pythagorean proposition measurement	•
Unit	mm/Inch/feet
Backlight	•
Auxiliary foot level	•
Laser target point	•
Data Logging	30 groups

STUD METAL DETECTOR



Model	MS6906
Page	216
Auto Power Off	7 Minute
Wooden Pillar	30mm
Metal Stud Detection Detph	30mm
Metal Pipe Detector Depth	50mm
AC Voltage Detection Detph	75mm (50~600VAC)
Data Hold	•
Backlight	•

PROCESS CALIBRATOR



Model	MS7221
Page	217
DC Volatge	10V
DC Current	10A
Loop Power Output	24V DC

DIGITAL MULTIMETERS

MANUAL RANGE | AUTO RANGE | POCKET & PEN TYPE
BENCH TYPE | SPECIAL APPLICATION





CAT II 1000V
CAT III 600V

POCKET DIGITAL MULTIMETER

M3900

SKU NO.: M3900CBGLO
UPC CODE: 810053674062
EAN CODE: 8435394779133


FEATURE

- Display 2000 Counts.
- Diode Open Voltage 2.8v.
- Low Battery Display.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 20MΩ	Display Counts 2000

MAIN APPLICATIONS

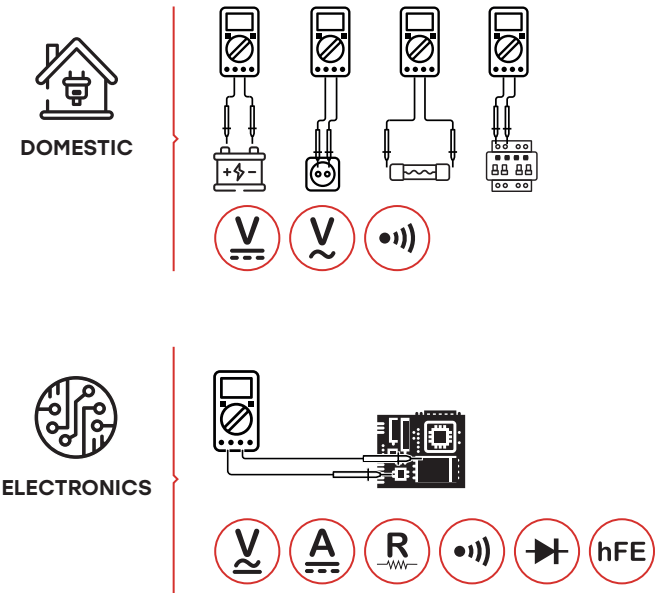

CONTENTS

- 172×88×36mm 6.7"×3.5"×1.4" 370g/0.8lb
- 1×9V 6F22 Battery
- Test Leads (ACCESSORIES)
- Calibration Certificate
- Quick Start Guide (QSG)

PACKAGING INFORMATION

Color Box
L165×W70×H255mm

Carton Box
47×37.5×35.5cm

X 20PCS



POCKET DIGITAL MULTIMETER

M830B

SKU NO.: M830BCBGLO
UPC CODE: 810053672495
EAN CODE: 8435394778136

FEATURE


- Display 2000 Counts.
- Pocket Size.

SPECIFICATIONS


AC Voltage 600V	DC Voltage 600V	AC Current 10A
Resistance 200kΩ	Display Counts 2000	

MAIN APPLICATIONS

DOMESTIC



ELECTRONICS

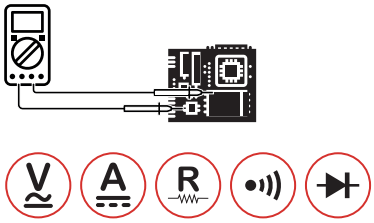

CONTENTS

126×70×25mm
4.9"×2.75"×0.9"
170g/0.4lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



POCKET DIGITAL MULTIMETER

M830BZ

SKU NO.: M830BZCBGLO
UPC CODE: 810053674581
EAN CODE: 8435394779652


FEATURE

- Display 2000 Counts.
- Pocket Size.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 10A
Resistance 200kΩ	Display Counts 2000	

MAIN APPLICATIONS

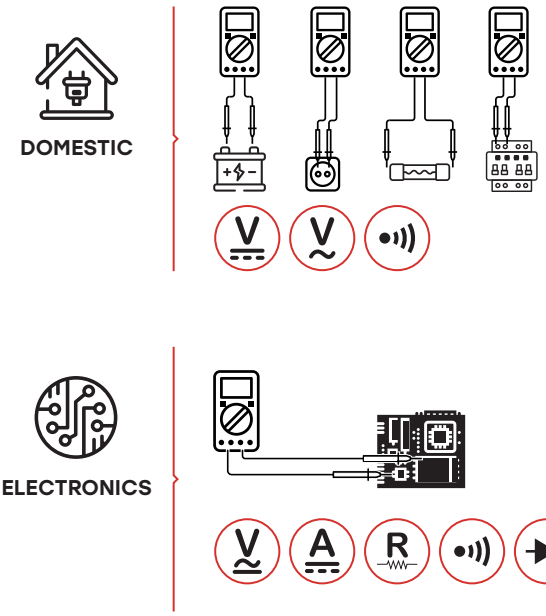

CONTENTS

126×70×25mm
4.9"×2.75"×0.9"
170g/0.4lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



POCKET DIGITAL MULTIMETER

M832

SKU NO.: M832CBGLO
UPC CODE: 810053672501
EAN CODE: 8435394778143


FEATURE

- Display 2000 Counts.
- Pocket Size.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
Resistance **2MΩ**	Display Counts **2000**	Continuity **<50Ω**

MAIN APPLICATIONS

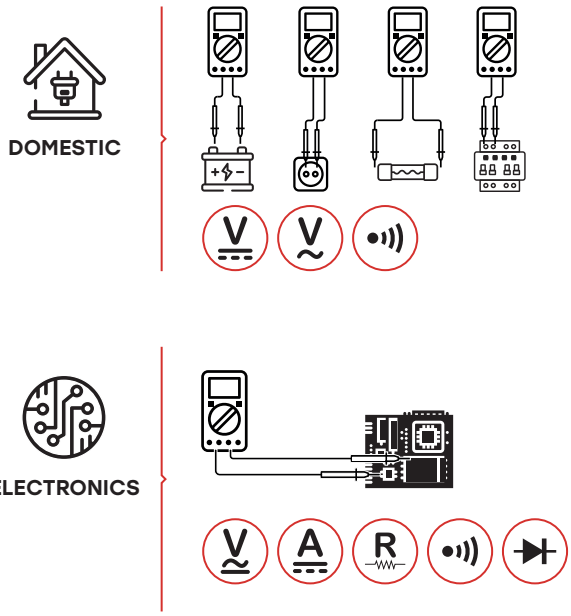

CONTENTS

126×70×25mm
4.9"×2.75"×0.9"
170g/0.4lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



POCKET DIGITAL MULTIMETER

M838

SKU NO.: M838CBAGLO
UPC CODE: 810053672518
EAN CODE: 8435394778150


FEATURE

- Display 2000 Counts.
- Pocket Size.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 10A
Resistance 200kΩ	Display Counts 2000	Continuity <50Ω
Temperature -20~1370°C		

MAIN APPLICATIONS

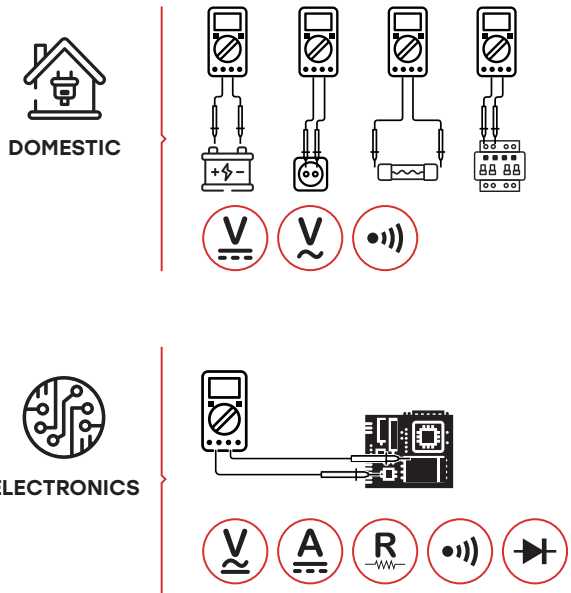

CONTENTS

126×70×25mm
4.9"×2.75"×0.9"
170g/0.4lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads
K-type thermocouple

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MAS830

SKU NO.: MAS830CBGLO
UPC CODE: 810053672525
EAN CODE: 8435394778167


FEATURE

- Diode Open Voltage 3.0V.
- Data Hold.
- Low Battery Display.
- Sample Rate 500mS.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **10A**
Resistance **2MΩ**	Display Counts **2000**	Continuity **<70±30Ω**

MAIN APPLICATIONS

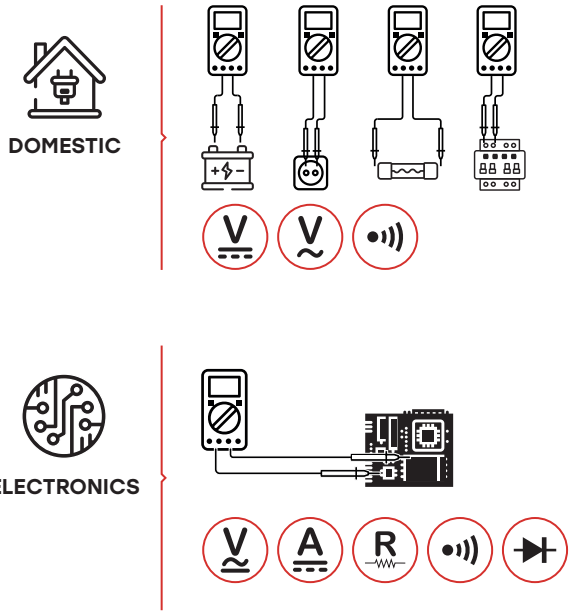

CONTENTS

145×76×40mm
5.7"×3"×1.57"
202g/0.44lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MAS830B

SKU NO.: MAS830BCBGLO
UPC CODE: 810053674864
EAN CODE: 8435394782072


FEATURE

- Diode Open Voltage 3.0V.
- Data Hold.
- Low Battery Display.
- Continuity Buzzer <70 ±30Ω.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	DC Current 10A
Resistance 2MΩ	Display Counts 2000	

MAIN APPLICATIONS

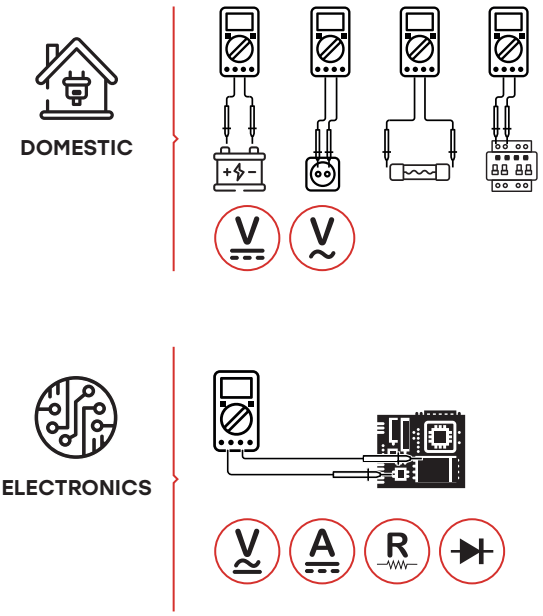

CONTENTS

145×76×40mm
5.7"×3"×1.57"
202g/0.44lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MAS830L

SKU NO.: MAS830LCBGLO
UPC CODE: 810053671993
EAN CODE: 8435394777726


FEATURE

- Diode Open Voltage 3.0V.
- Data Hold.
- Low Battery Display.
- Continuity Buzzer <70 ±30Ω.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **10A**
Resistance **2MΩ**	Display Counts **2000**	Continuity **<70±30Ω**

MAIN APPLICATIONS

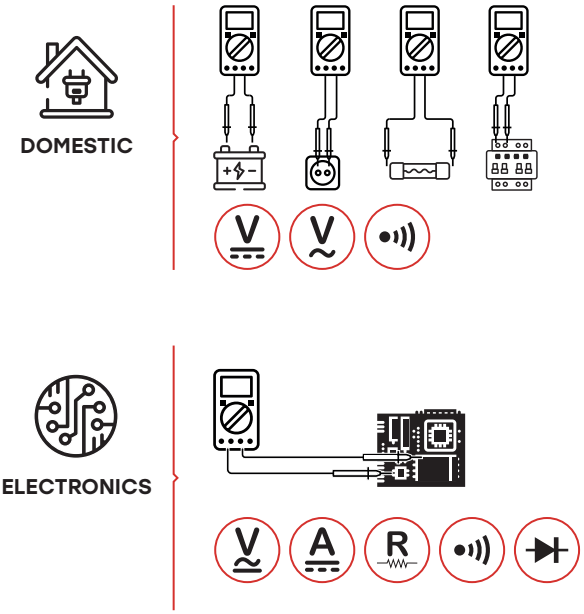

CONTENTS

145×76×40mm
5.7"×3"×1.57"
202g/0.44lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



CAT II 600V

DIGITAL MULTIMETER

MAS838

SKU NO.: MAS838CBGLO
UPC CODE: 810053672365
EAN CODE: 8435394784304


FEATURE

- Diode Open Voltage 3.0V.
- Data Hold.
- Low Battery Display.
- Continuity Buzzer <70 ±30Ω.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **10A**
Resistance **2MΩ**	Display Counts **2000**	Continuity **<70 ±30Ω**
Temperature **-20°C~1000°C**		

MAIN APPLICATIONS

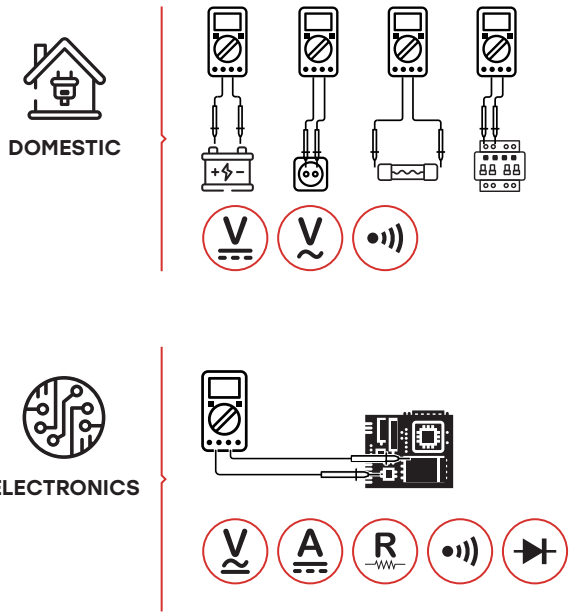

CONTENTS

145×76×40mm
5.7"×3"×1.57"
202g/0.44lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
K-type thermocouple

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8233A

SKU NO.: MS8233ACBGLO
UPC CODE: 810053673140
EAN CODE: 8435394778877


FEATURE

- Diode Open Voltage 3.0V.
- Continuity Buzzer <60Ω.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **10A**
Resistance **2MΩ**	Continuity **<60Ω**	Display Counts **2000**

MAIN APPLICATIONS

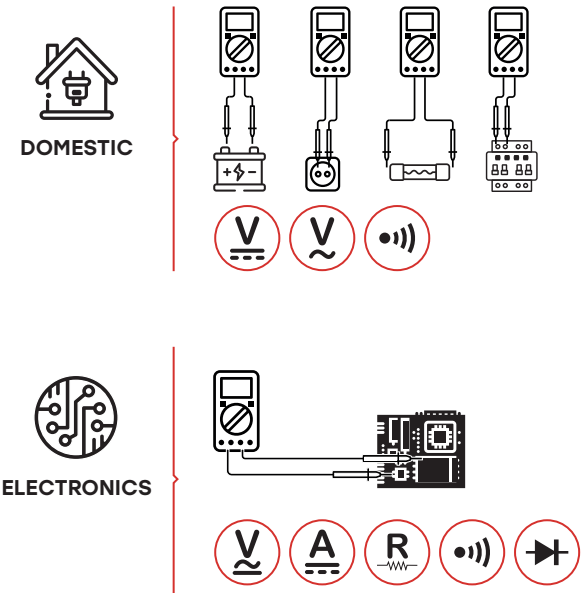

CONTENTS

140×67×30mm
5.5"×2.6"×1.2"
112g/0.25lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
49×28×37cm

X 20PCS



DIGITAL MULTIMETER

MS8233B

SKU NO.: MS8233BCBGLO
UPC CODE: 810053674840
EAN CODE: 8435394783369


FEATURE

- Diode Open Voltage 3.0V.
- Low Battery Display.
- Display Backlight.
- Non-contact Voltage Detection.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **10A**
Resistance **2MΩ**	Continuity **<60Ω**	Display Counts **2000**

MAIN APPLICATIONS

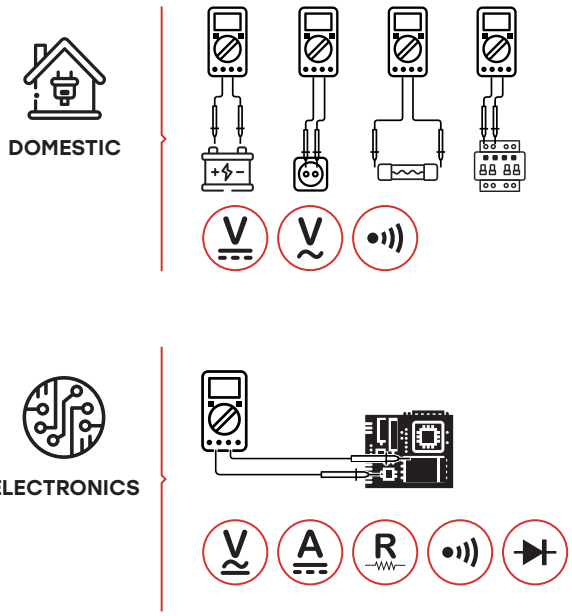

CONTENTS

140×67×30mm
5.5"×2.6"×1.2"
112g/0.25lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8233C

SKU NO.: MS8233CCBGLO
UPC CODE: 810053672228
EAN CODE: 8435394777948

FEATURE


- Diode Open Voltage 3.0V.
- Low Battery Display.
- Display Backlight.
- Non-contact Voltage Detection.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	DC Current **10A**
Resistance **2MΩ**	Continuity **<60Ω**	Display Counts **2000**
Temperature **-20°C~1000°C/-4°F~1832°F**		

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL

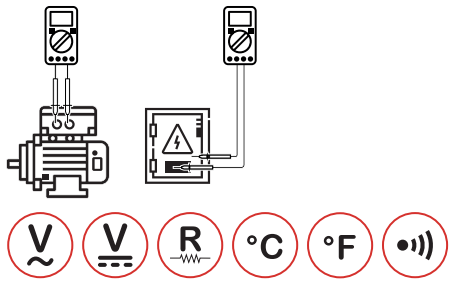

ELECTRONICS

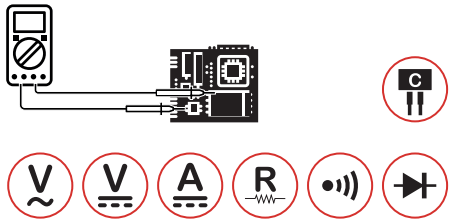

CONTENTS

140×67×30mm
5.5"×2.6"×1.2"
112g/0.25lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
K-type thermocouple
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8238

SKU NO.: MS8238CBGLO
UPC CODE: 810053672662
EAN CODE: 8435394778303


FEATURE

- Diode Open Voltage 3.0V.
- Battery Test 1.5V/9V/12V.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

AC Voltage	DC Voltage	DC Current
600V	600V	10A
Resistance	**Continuity**	**Display Counts**
2MΩ	<50Ω	2000

MAIN APPLICATIONS

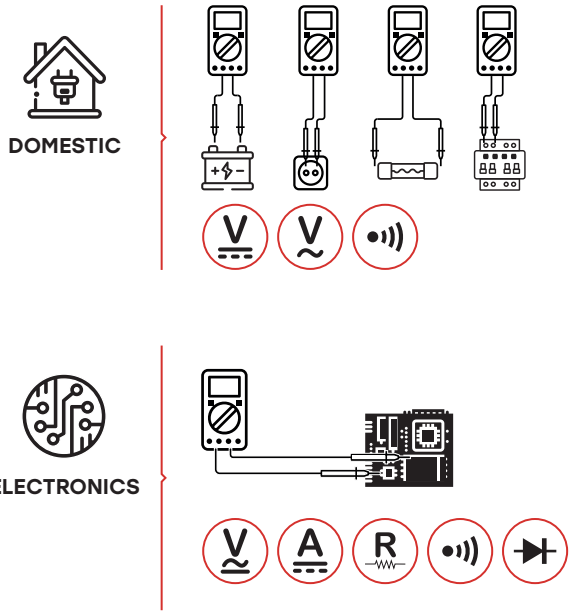

CONTENTS

148×73.5×50mm
5.8"×2.9"×1.96"
232g/0.51lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm


Carton Box
40×32×31.5cm

X 20PCS



CAT II 1000V
CAT III 600V

MAIN APPLICATIONS

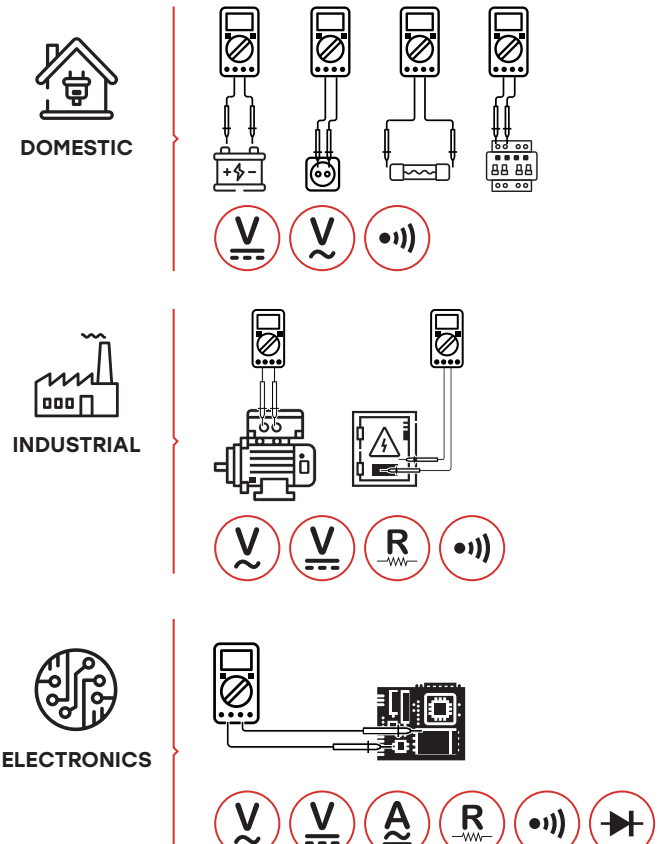

DIGITAL MULTIMETER

MS8261

SKU NO.: MS8261CBGLO
UPC CODE: 810053674437
EAN CODE: 8435394779508

FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Continuity <70Ω
Capacitance 20μF	Display Counts 2000	

CONTENTS

195×92×55mm
7.7"×3.6"×2.2"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm


Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

MAIN APPLICATIONS

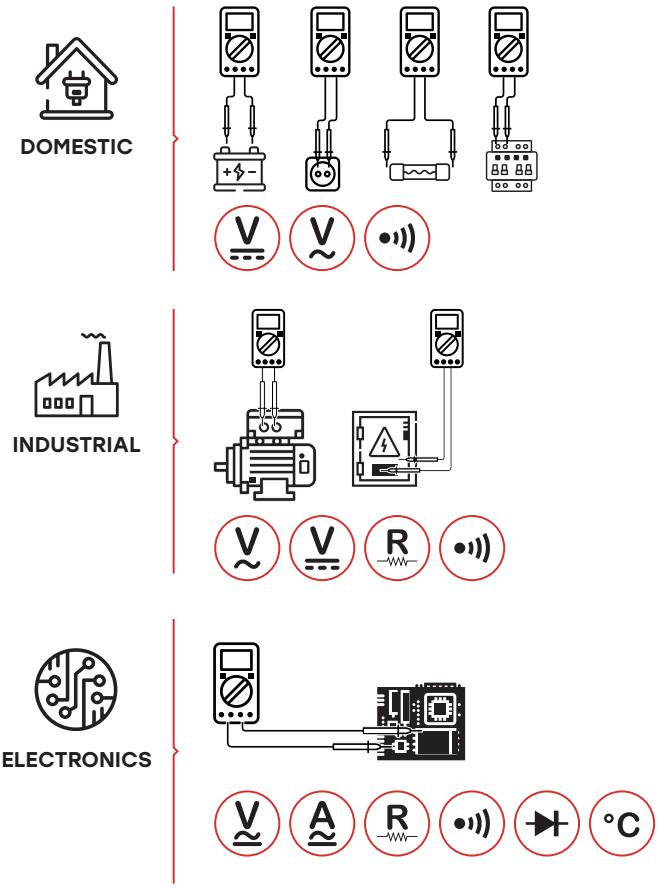

DIGITAL MULTIMETER

MS8264

SKU NO.: MS8264CBGLO
UPC CODE: 810053674444
EAN CODE: 8435394779515

FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Continuity <70Ω
Capacitance 20μF	Frequency 20kHz	Display Counts 2000
Temperature -20°C~1000°C		

CONTENTS

195×92×55mm
7.7"×3.6"×2.2"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm


Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

MAIN APPLICATIONS

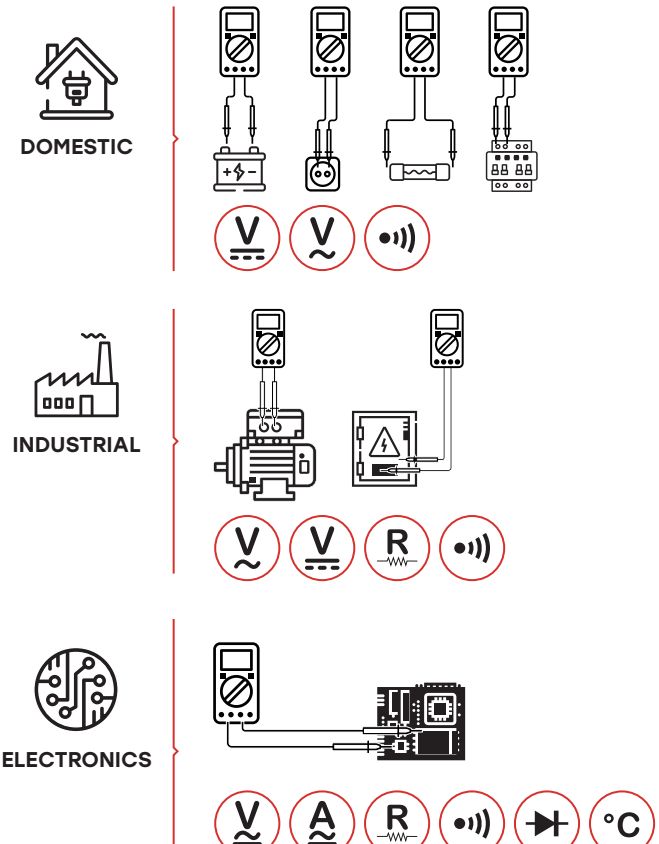

DIGITAL MULTIMETER

MS8269

SKU NO.: MS8269CBGLO
UPC CODE: 810053674468
EAN CODE: 8435394779539

FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 20MΩ	Continuity test <70Ω
Capacitance 200μF	Inductance 20H	Display Counts 2000
Temperature -20°C~1000°C		

CONTENTS

195×92×55mm
7.7"×3.6"×2.2"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CE

Intertek

RoHS

CAT III 600V

DIGITAL MULTIMETER

MS8301A

SKU NO.: MS8301ACBGLO
UPC CODE: 810053675540
EAN CODE: 8435394784298


FEATURE

- Display 2000 Counts.
- Data hold.
- Battery Tester 1.5V/9V.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **10A**
Resistance **2MΩ**	Continuity test **<30Ω**	Display Counts **2000**

MAIN APPLICATIONS

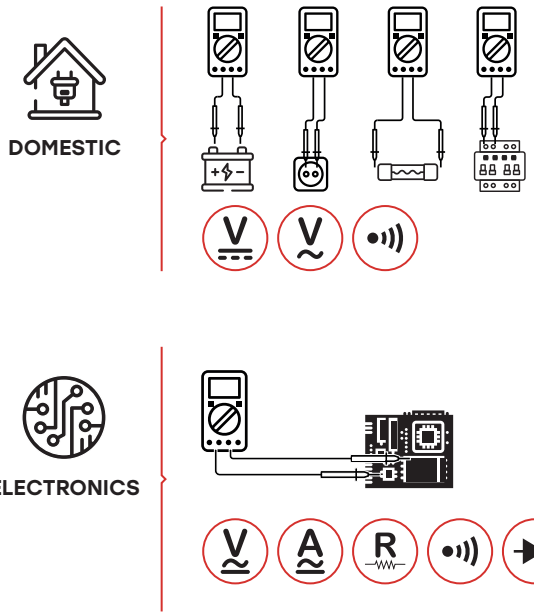

CONTENTS

145×60×188mm
5.7"×2.4"×7.4"
220g/0.48lb

2×1.5V AAA Batteries

ACCESSORIES
Test Leads
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8301B

SKU NO.: MS8301BCBGLO
UPC CODE: 810053676769
EAN CODE: 8435394785295

FEATURE


- Display 4000 Counts.
- Back Light.
- Non-contact Voltage Detector.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Continuity test **<50Ω**
Capacitance **100μF**	Frequency **10kHz**	Display Counts **4000**
Temperature **-4°F~1832°F**		

MAIN APPLICATIONS

DOMESTIC



ELECTRONICS

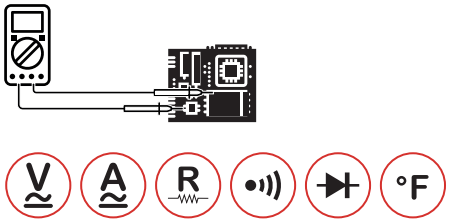

CONTENTS

145×60×188mm
5.7"×2.4"×7.4"
220g/0.48lb

3×1.5V AAA Batteries

ACCESSORIES
Test leads
K type thermocouple
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8321A

SKU NO.: MS8321ACBGLO
UPC CODE: 810053674475
EAN CODE: 8435394779546


FEATURE

- Manual Ranging.
- Auto Power Off.
- Data Hold.
- Diode Open Voltage 3.0V.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 20MΩ	Continuity <40Ω
Display Counts 2000		

MAIN APPLICATIONS

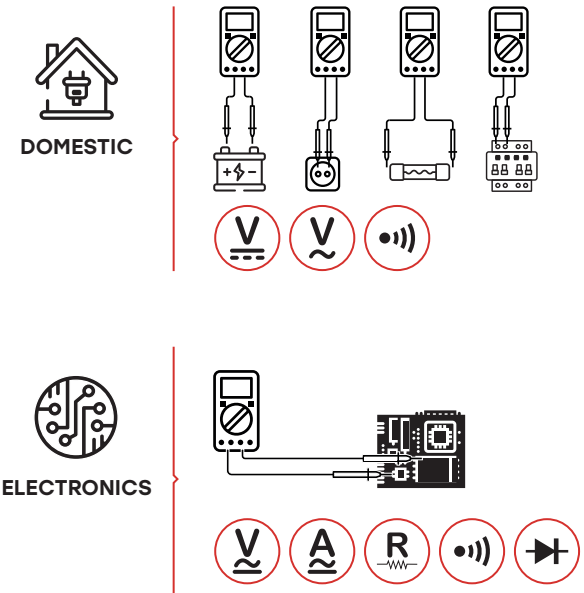

CONTENTS

158×74×36mm
5.8"×2.87"×1.5"
220g/0.48lb

1×9V 6F22 Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MS8321D

SKU NO.: MS8321DCBGLO
UPC CODE: 810053675342
EAN CODE: 8435394783390

FEATURE


- Manual Ranging.
- Auto Power Off.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS


AC Voltage 750V	DC Voltage 1000V	AC Current 20A
DC Current 20A	Resistance 20MΩ	Continuity <60Ω
Display Counts 2000		

MAIN APPLICATIONS

DOMESTIC



ELECTRONICS

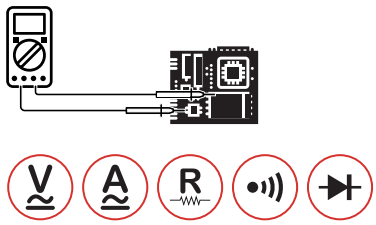

CONTENTS

158×74×36mm
5.8"×2.87"×1.5"
220g/0.48lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads
Battery

Calibration Certificate


QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS

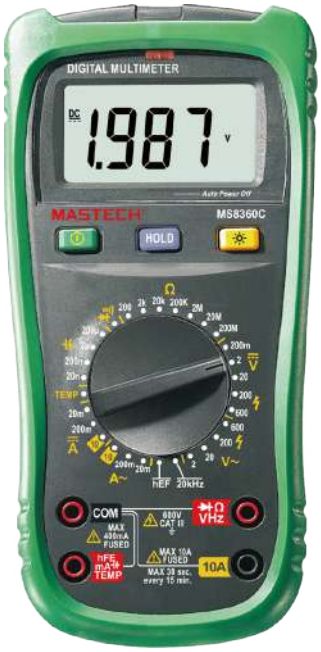

CAT III 600V

DIGITAL MULTIMETER

MS8360C

SKU NO.: MS8360CCBGLO
UPC CODE: 810053674925
EAN CODE: 8435394782669

FEATURE

- Auto Power Off.
- Non-Contact Voltage Detector.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **200MΩ**	Continuity **<50Ω**
Capacitance **200μF**	Frequency **20kHz**	Display Counts **2000**
Temperature **-20°C~1000°C/-4°F~1832°F**		

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

ELECTRONICS

CONTENTS

188×92×50mm
7.4"×3.6"×2.0"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT III 600V

DIGITAL MULTIMETER

MS8360E

SKU NO.: MS8360ECBGLO
UPC CODE: 810053674499
EAN CODE: 8435394779560

FEATURE


- Auto Power Off.
- Non-Contact Voltage Detector.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **200MΩ**	Continuity test **<50Ω**
Capacitance **200μF**	Frequency **20kHz**	Display counts **2000**

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL



ELECTRONICS

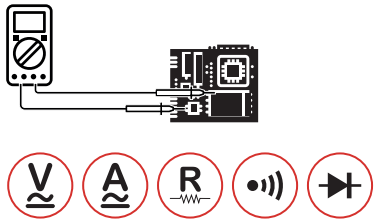

CONTENTS

188×92×50mm
7.4"×3.6"×2.0"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MY60

SKU NO.: MY60CBGLO
UPC CODE: 810053672426
EAN CODE: 8435394778068


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **200MΩ**	Capacitance **100μF**
Frequency **20kHz**	Continuity **<50Ω**	Display Counts **2000**

MAIN APPLICATIONS

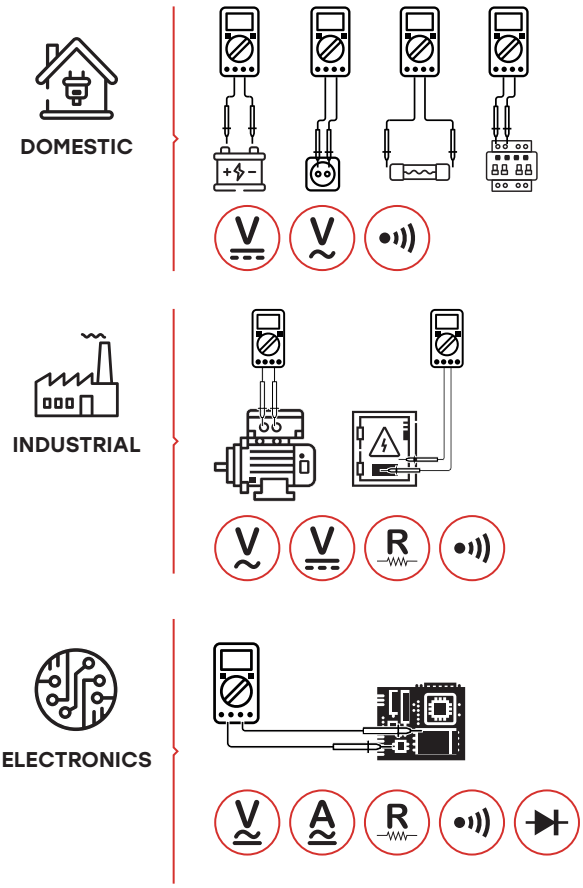

CONTENTS

195×95×55mm
7.67"×3.74"×2.16"
366g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MY61

SKU NO.: MY61CBGLO
UPC CODE: 810053672419
EAN CODE: 8435394778051


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Capacitance 100μF
Frequency 20kHz	Continuity <50Ω	Display Counts 2000

MAIN APPLICATIONS

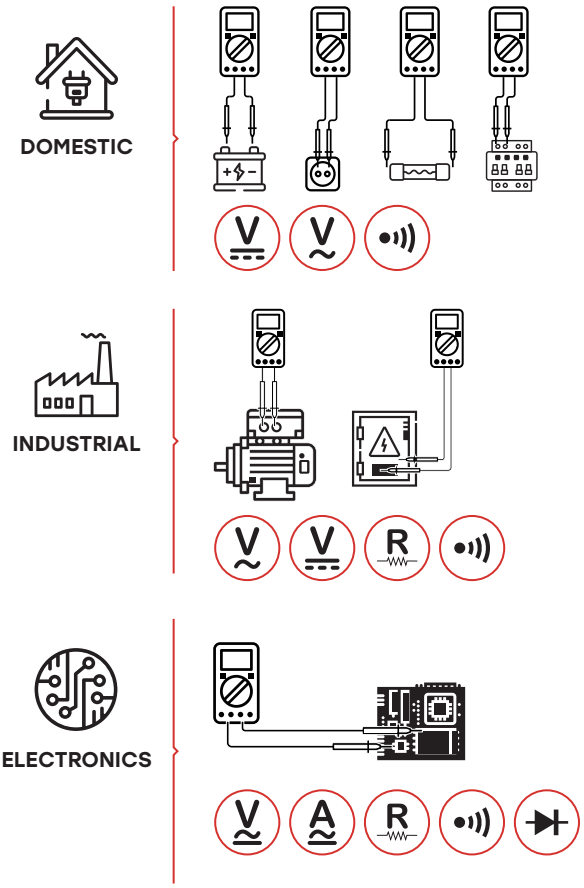

CONTENTS

195×95×55mm
7.67"×3.74"×2.16"
366g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MY62

SKU NO.: MY62CBGLO
UPC CODE: 810053672433
EAN CODE: 8435394778075


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Capacitance 100μF
Frequency 20kHz	Continuity <50Ω	Display Counts 2000
Temperature -20°C~1000°C		

MAIN APPLICATIONS

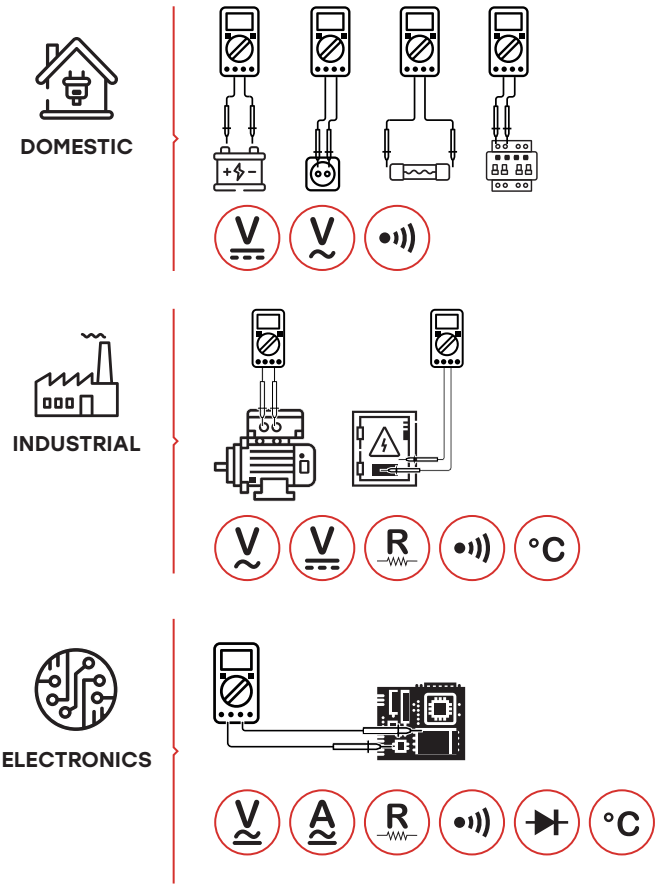

CONTENTS

195×95×55mm
7.67"×3.74"×2.16"
366g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MY63

SKU NO.: MY63CBGLO
UPC CODE: 810053674833
EAN CODE: 8435394782003


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Capacitance 100μF
Frequency 20kHz	Continuity <50Ω	Display Counts 2000

MAIN APPLICATIONS

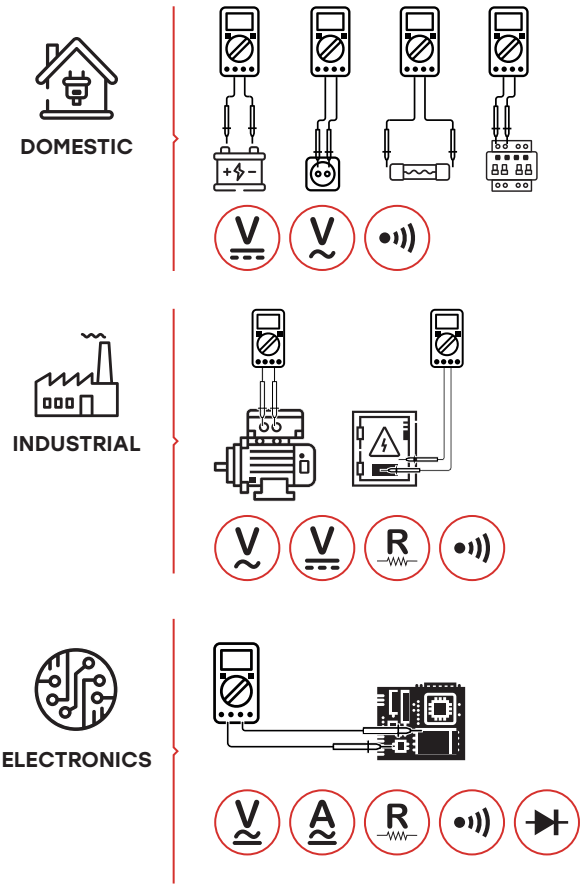

CONTENTS

195×95×55mm
7.67"×3.74"×2.16"
366g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MY64

SKU NO.: MY64CBGLO
UPC CODE: 810053673324
EAN CODE: 8435394779058

FEATURE


- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS


AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Capacitance 100μF
Frequency 20kHz	Continuity <50Ω	Display Counts 2000
Temperature -20°C~1000°C		

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL

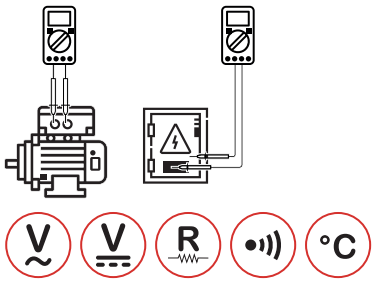

ELECTRONICS

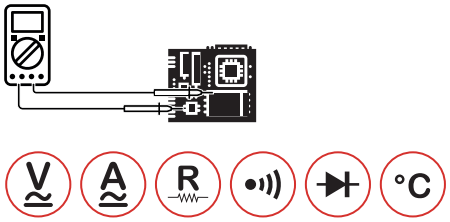

CONTENTS

195×95×55mm
7.67"×3.74"×2.16"
366g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MY65

SKU NO.: MY65CBGLO
UPC CODE: 810053672440
EAN CODE: 8435394778082


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **200MΩ**	Capacitance **100μF**
Frequency **20kHz**	Continuity **<70Ω**	Display Counts **20000**

MAIN APPLICATIONS

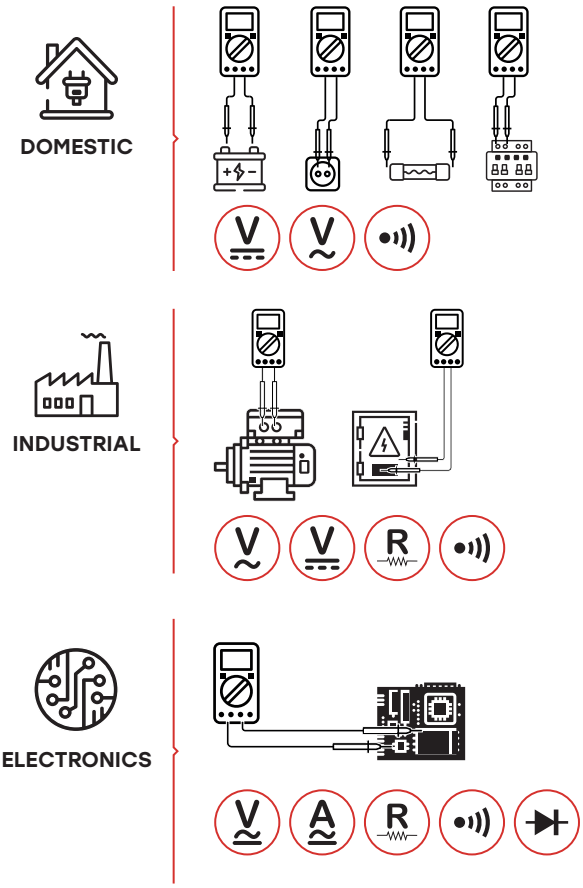

CONTENTS

195×95×55mm
7.67"×3.74"×2.16"
366g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL MULTIMETER

MY70

SKU NO.: MY70CBGLO
UPC CODE: 810053672280
EAN CODE: 8435394778006


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Continuity <50Ω
Display Counts 2000		

MAIN APPLICATIONS

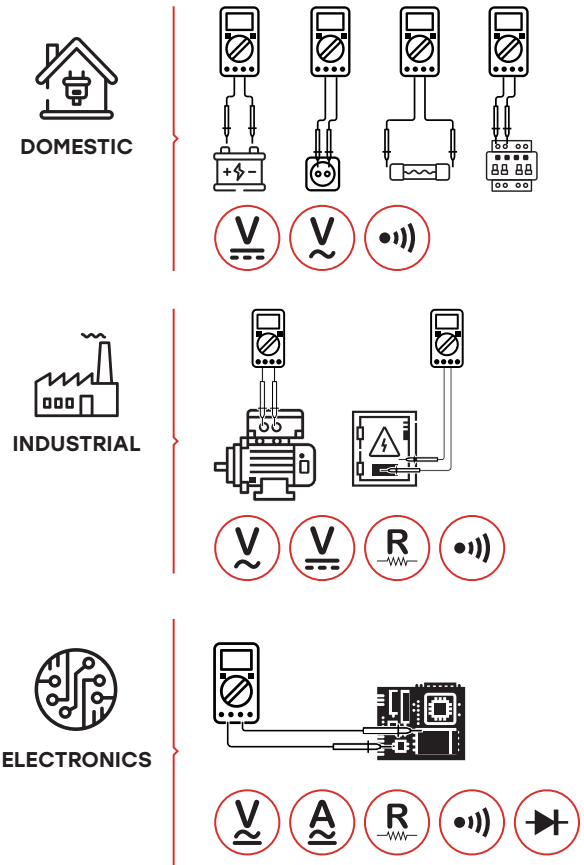

CONTENTS

188×93×50mm
7.4"×3.7"×1.96"
380g/0.84lb

1×9V 6F22 Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL MULTIMETER

MY74

SKU NO.: MY74CBGLO
UPC CODE: 810053672297
EAN CODE: 8435394778013


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 200MΩ	Capacitance 100μF
Frequency 20kHz	Continuity <50Ω	Display Counts 2000
Temperature -20°C~1000°C		

MAIN APPLICATIONS

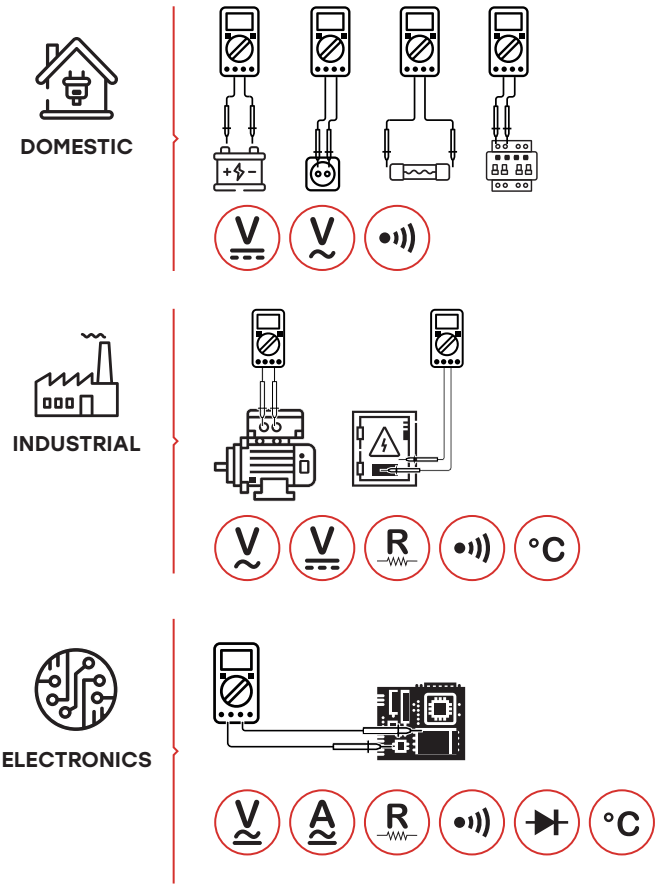

CONTENTS

188×93×50mm
7.4"×3.7"×1.96"
380g/0.84lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CE

Intertek

RoHS

CAT III 600V

DIGITAL MULTIMETER

MY75

SKU NO.: MY75CBGLO
UPC CODE: 810053672303
EAN CODE: 8435394778020

FEATURE


- Diode Open Voltage 3.0V.
- Transistor hFE 0~1000.
- Data Hold.
- Auto Power Off.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **200MΩ**	Capacitance **200nF**
Frequency **20kHz**	Continuity **<60Ω**	Display Counts **20000**

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL



ELECTRONICS

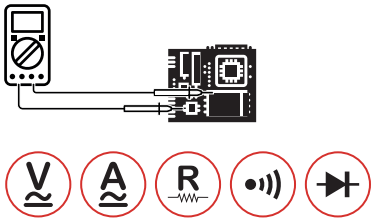

CONTENTS

188×93×50mm
7.4"×3.7"×1.96"
380g/0.84lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



NEW

DIGITAL MULTIMETER

MS820L

SKU NO.: MS820LCBGLO
UPC CODE: 810053678183
EAN CODE: 8435394787787


FEATURE

- Display 2000 counts.
- Data Hold.
- Auto Power Off.

SPECIFICATIONS

AC Voltage **500V**	DC Voltage **500V**	DC Current **10A**
Resistance **200MΩ**	Continuity **<50±20Ω**	Display Counts **2000**

MAIN APPLICATIONS

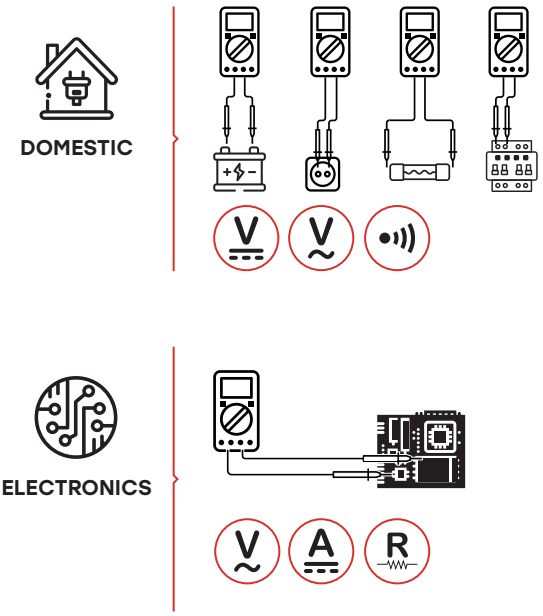

CONTENTS

115x65x30mm
4.5"x2.6"x1.2"
170g/0.37lb

2×1.5V AAA Batteries

ACCESSORIES
Test Leads
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W50×H160mm

Carton Box
53.8×30.8×17.8cm

X 20PCS



DIGITAL MULTIMETER

MS8217

SKU NO.: MS8217CBGLO
UPC CODE: 810053673263
EAN CODE: 8435394778990


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Diode Open Voltage 1.5V.

SPECIFICATIONS

AC Voltage **1000V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Capacitance **100uF**
Frequency **100kHz**	Continuity **<50±20Ω**	Display Counts **2000**
Temperature **-55°C~1000°C**		

MAIN APPLICATIONS

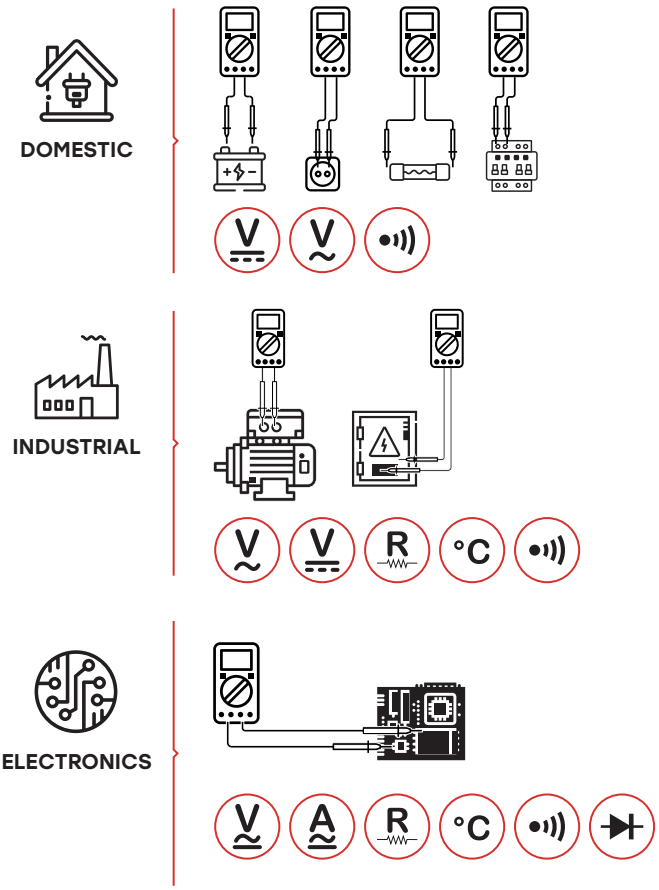

CONTENTS

185×87×53mm
7.28"×3.4"×2.04"
360g/0.79lb

3×1.5V AAA Batteries

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL MULTIMETER

MS8221C

SKU NO.: MS8221CCBGLO
UPC CODE: 810053672310
EAN CODE: 8435394778457

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Diode Open Voltage 1.5V.

SPECIFICATIONS


AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 20MΩ	Capacitance 1000uF
Frequency 400kHz	Continuity <50±20Ω	Display Counts 2000
Temperature -20°C~1000°C		

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL

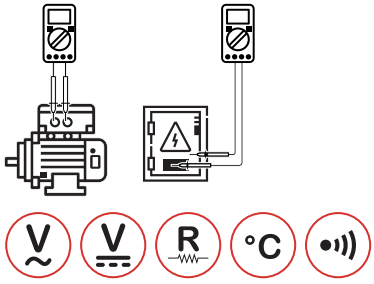

ELECTRONICS

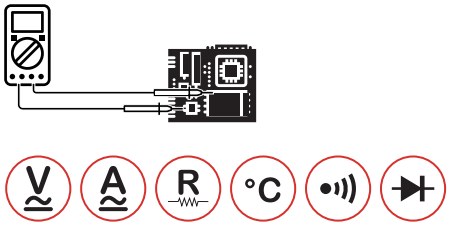

CONTENTS

158×74×32mm
6.2"×2.9"×1.2"
250g/0.55lb

3×1.5V AAA Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8233D

SKU NO.: MS8233DCBGLO
UPC CODE: 810053673201
EAN CODE: 8435394778938

FEATURE


- Non-contact Voltage Detection.
- Maximum Measurement.
- Display Backlight.
- Low Battery Display.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **20MΩ**	Continuity **<60Ω**
Display Counts **2000**		

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL



ELECTRONICS

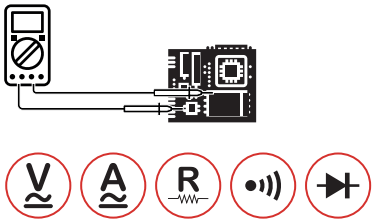

CONTENTS

140×67×30mm
5.5"×2.6"×1.2"
112g/0.25lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8233E

SKU NO.: MS8233ECBGLO
UPC CODE: 810053672259
EAN CODE: 8435394777979


FEATURE

- Non-contact Voltage Detection.
- Maximum Measurement.
- Display Backlight.
- Low Battery Display.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 20MΩ	Continuity <60Ω
Display Counts 2000	Temperature -20°C~1000°C/-4°F~1832°F	

MAIN APPLICATIONS

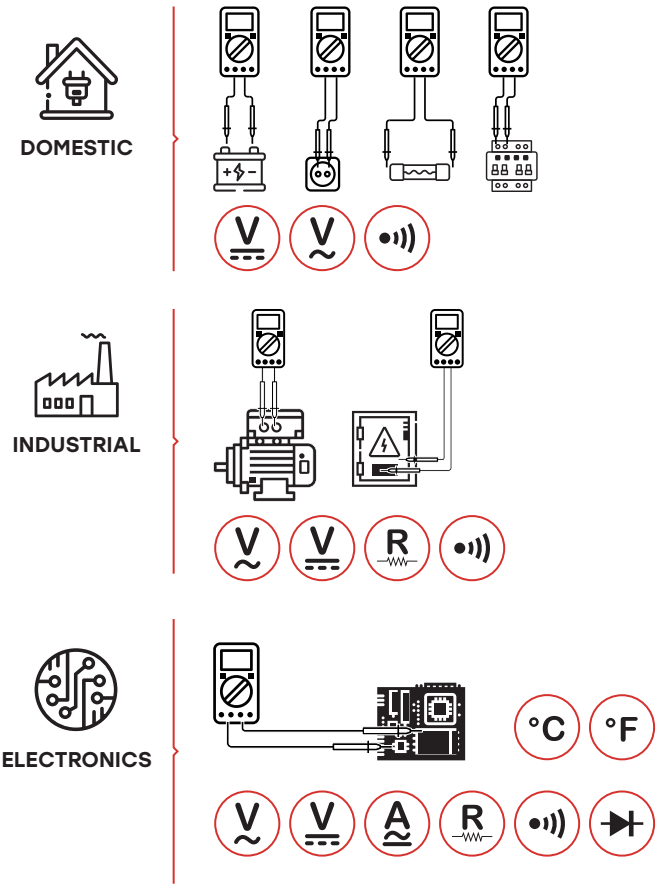

CONTENTS

140×67×30mm
5.5"×2.6"×1.2"
112g/0.25lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER WITH WIRELESS

MS8238H

SKU NO.: MS8238HCBGLO
UPC CODE: 810053675335
EAN CODE: 8435394783383

FEATURE


- Auto Power Off.
- True RMS For AC Voltage & AC Current.
- Wireless APP connection.
- Non-Contact Voltage Detector.

SPECIFICATIONS


AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 40MΩ	Continuity <50Ω
Display Counts 4000	Temperature -20°C~1000°C/-4°F~1832°F	

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL

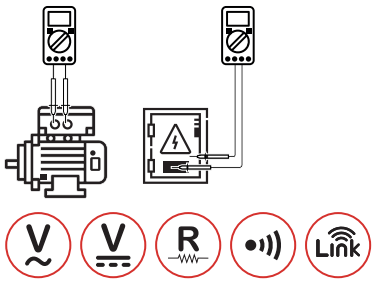

ELECTRONICS

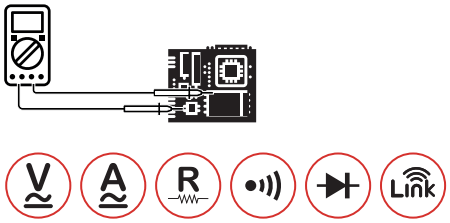

CONTENTS

148×73.5×50mm
5.8"×2.9"×1.96"
241g/0.53lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8239C

SKU NO.: MS8239CCBGLO
UPC CODE: 810053672266
EAN CODE: 8435394777986


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- Data Hold.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 40MΩ	Continuity <50±20Ω
Frequency 10kHz	Temperature -20°C~1000°C/-4°F~1832°F	
Display Counts 4000		

MAIN APPLICATIONS

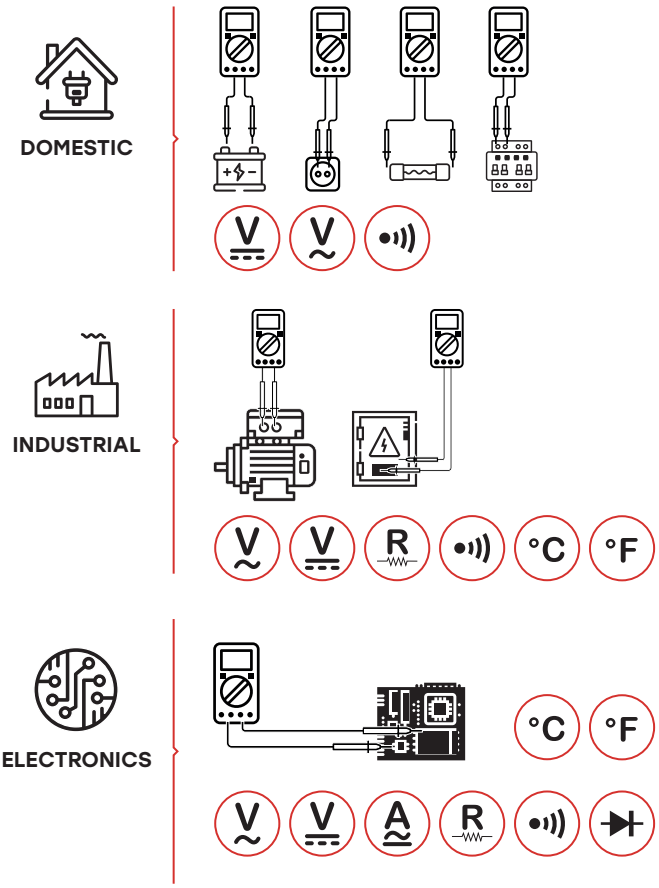

CONTENTS

150×74×41mm
5.9"×2.9"×1.6"
202g/0.44lb

2×1.5V AAA Batteries

ACCESSORIES
Test leads
K type thermocouple
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



CAT III 1000V
CAT IV 600V

DIGITAL MULTIMETER

MS8250A

SKU NO.: MS8250ACBGLO
UPC CODE: 810053672679
EAN CODE: 8435394778310


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Non-Contact Voltage Detector.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Continuity **<50±20Ω**
Capacitance **100μF**	Frequency **5MHz**	Display Counts **4000**

MAIN APPLICATIONS

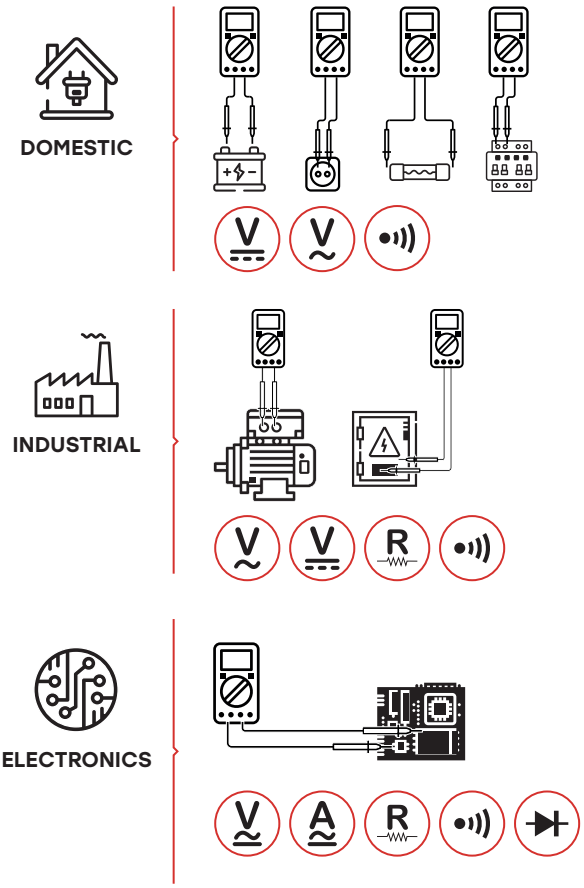

CONTENTS

175×86×52mm
6.89"×3.38"×2.04"
372g/0.82lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT III 1000V
CAT IV 600V

DIGITAL MULTIMETER WITH USB

MS8250D

SKU NO.: MS8250DCBGLO
UPC CODE: 810053674413
EAN CODE: 8435394779485

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- True RMS.
- Non-Contact Voltage Detector.

SPECIFICATIONS


AC Voltage **1000V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **66MΩ**	Continuity test **<50Ω**
Capacitance **66mF**	Frequency **66MHz**	Display counts **6600**

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL

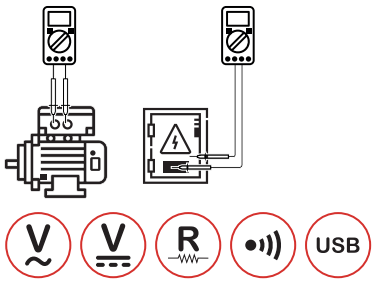

ELECTRONICS

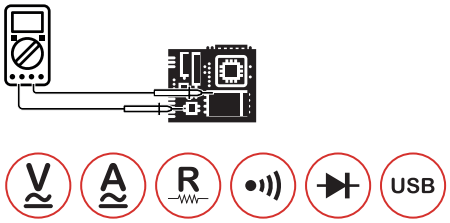

CONTENTS

175×86×52mm
6.89"×3.38"×2.04"
372g/0.82lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
USB interface cable
Software CD
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT III 1000V
CAT IV 600V

DIGITAL MULTIMETER

MS8251A

SKU NO.: MS8251ACBGLO
UPC CODE: 810053673157
EAN CODE: 8435394778884


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- True RMS.
- Non-Contact Voltage Detector.

SPECIFICATIONS

AC Voltage **1000V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **66MΩ**	Continuity **<50±20Ω**
Capacitance **66mF**	Frequency **66MHz**	Display Counts **6600**

MAIN APPLICATIONS

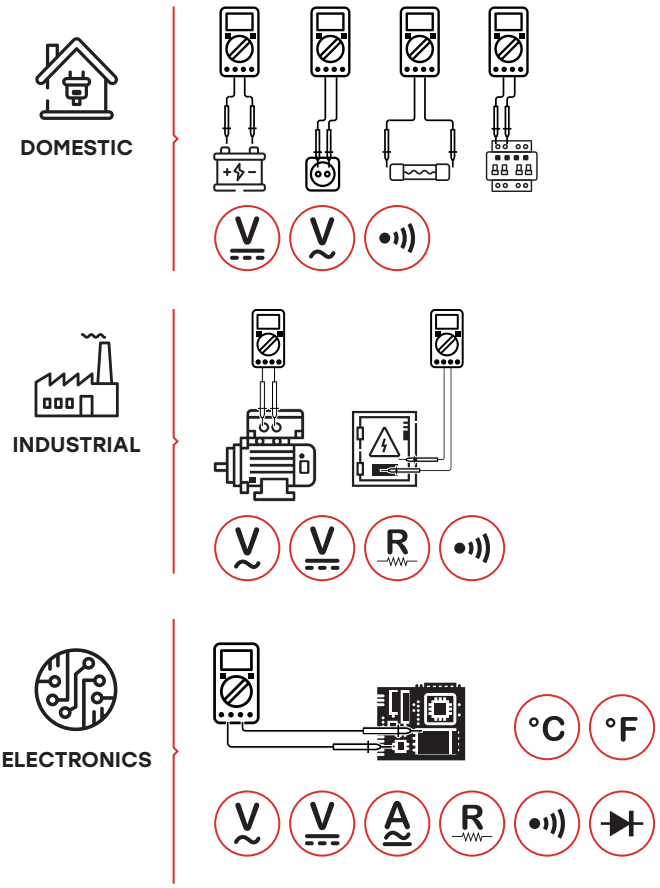

CONTENTS

175×85×52mm
6.89"×3.3"×2.1"
420g/0.92lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Carrying strap
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT III 1000V
CAT IV 600V

DIGITAL MULTIMETER

MS8251B

SKU NO.: MS8251BCBGLO
UPC CODE: 810053672686
EAN CODE: 8435394778327


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Non-Contact Voltage Detector.

SPECIFICATIONS

AC Voltage 1000V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 66MΩ	Continuity <50±20Ω
Capacitance 66mF	Frequency 10kHz	Display Counts 6600
Temperature 0°C~1000°C/32°F~1832°F		

MAIN APPLICATIONS

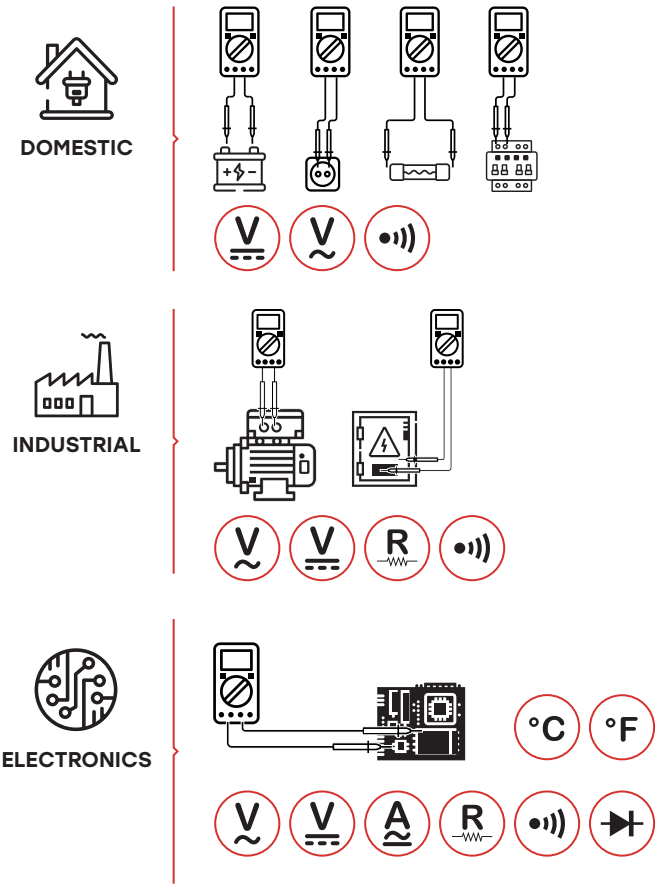

CONTENTS

175×85×52mm
6.9"×3.3"×2.1"
420g/0.92lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Carrying strap
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MS8268

SKU NO.: MS8268CBGLO
UPC CODE: 810053672709
EAN CODE: 8435394778341


FEATURE

- Auto Ranging.
- Auto Power Off.
- Sound & Light Warning.
- Relative Measurement.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 40MΩ	Continuity <70Ω
Capacitance 200μF	Frequency 200kHz	Display Counts 4000

MAIN APPLICATIONS

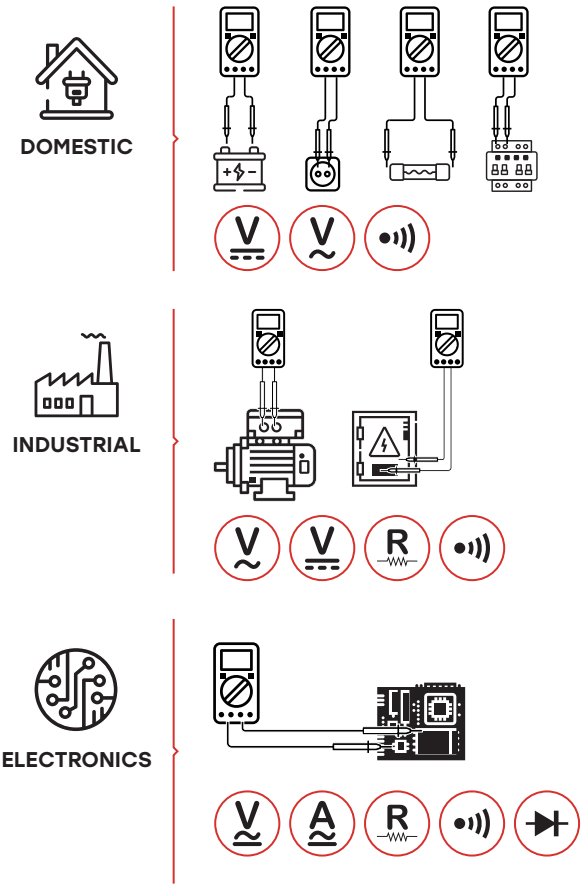

CONTENTS

195×92×55mm
7.7"×3.6"×2.2"
400g/0.9lb

3×1.5V AAA Batteries

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT III 600V

DIGSMART DIGITAL MULTIMETER

MS8301D

SKU NO.: MS8301DCBGLO
UPC CODE: 810053672273
EAN CODE: 8435394777993


FEATURE

- Auto Ranging.
- Auto Power Off.
- Dual Display.
- Continuity Buzzer.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	Resistance **10MΩ**
Frequency **3kHz**	Continuity **<40Ω**	Display Counts **6000**

MAIN APPLICATIONS

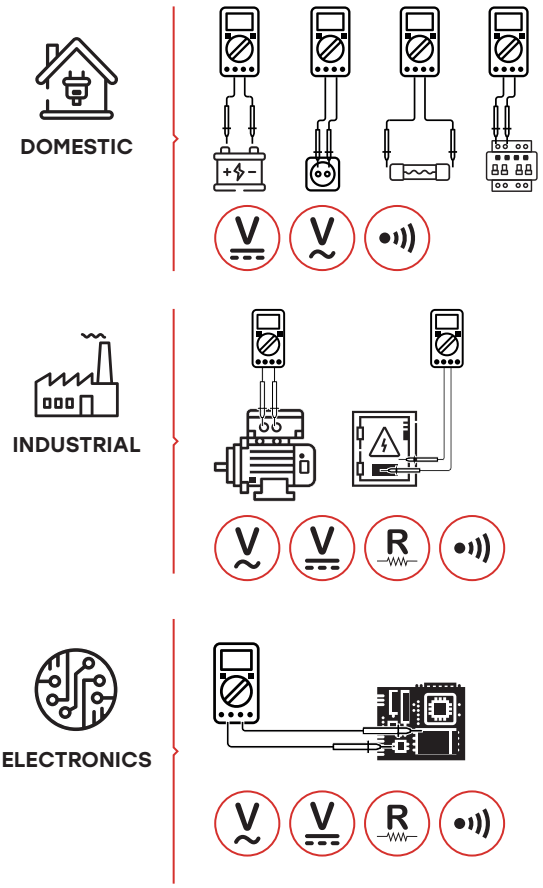

CONTENTS

150×74×48mm
5.9''×2.9''×1.7''
220g/0.48lb

2×1.5V AAA Batteries

ACCESSORIES
Test Leads
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



DIGITAL MULTIMETER

MS8332C

SKU NO.: MS8332CCBGLO
UPC CODE: 810053674857
EAN CODE: 8435394782065


FEATURE

- Display 4000 Counts.
- Diode Open Voltage 1.5v.
- Low Battery Display.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **400mA**
DC Current **400mA**	Resistance **40MΩ**	Continuity **<50±20Ω**
Capacitance **100μF**	Frequency **5MHz**	Display Counts **4000**

MAIN APPLICATIONS

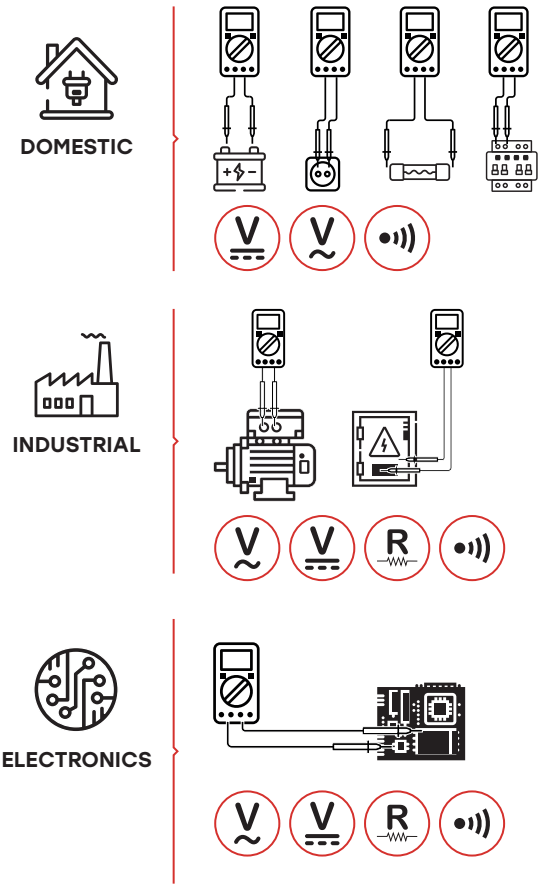

CONTENTS

110×58×33mm
4.4"×2.3"×1.3"
150g/0.25lb

2×1.5V AAA Batteries

ACCESSORIES
Test Leads
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



CAT III 1000V

DIGITAL MULTIMETER

MS8340A

SKU NO.: MS8340ACBGLO
UPC CODE: 810053675359
EAN CODE: 8435394783000

FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Low Pass Filter 1kHz.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 10A
DC Current 10A	Resistance 60MΩ	Continuity <50±20Ω
Capacitance 400μF	Frequency 10MHz	Display Counts 6000
Temperature -10°C~700°C/-14°F~1292°F		

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

ELECTRONICS

CONTENTS

205×102×58mm
8.1"×4.0"×2.2"
390g/0.86lb

4×1.5V AA Batteries

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L173×W85×H235mm

Carton Box
49×45×37.2cm

X 20PCS



DIGITAL MULTIMETER

MS8360F

SKU NO.: MS8360FCBGLO
UPC CODE: 810053676783
EAN CODE: 8435394785325


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Non-Contact Voltage Detector.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Continuity **<50±20Ω**
Capacitance **200μF**	Frequency **10MHz**	Display Counts **4000**

MAIN APPLICATIONS

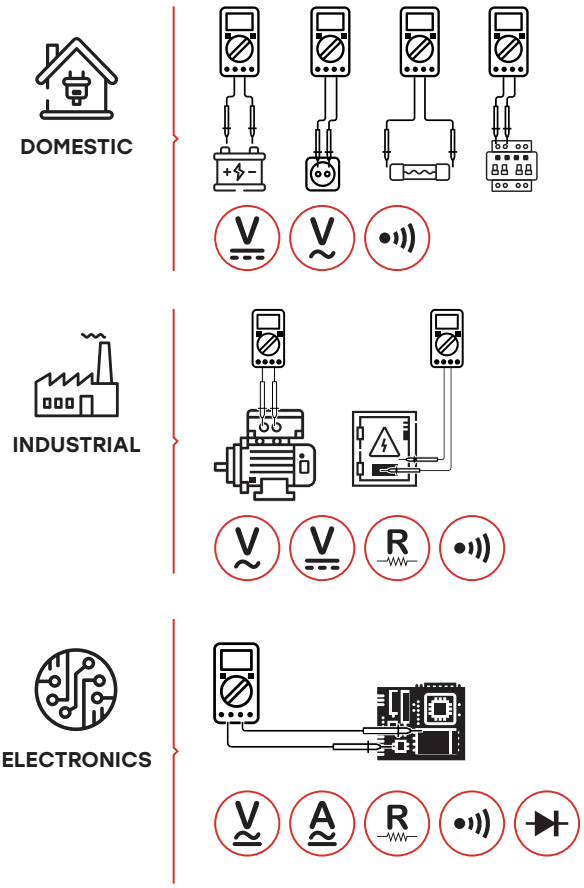

CONTENTS

188×92×50mm
7.4"×3.6"×2.0"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL MULTIMETER

MS8360G

SKU NO.: MS8360GCBGLO
UPC CODE: 810053672075
EAN CODE: 8435394777801

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Non-Contact Voltage Detector.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Continuity **<50±20Ω**
Capacitance **4000μF**	Frequency **10MHz**	Display Counts **4000**
Temperature **-20°C~1000°C/-4°F~1832°F**		

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL

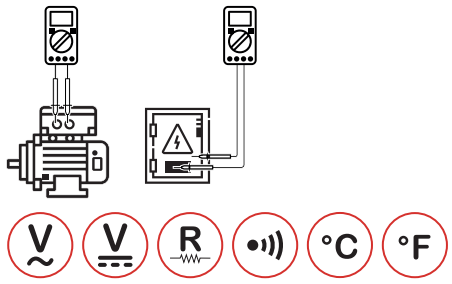

ELECTRONICS

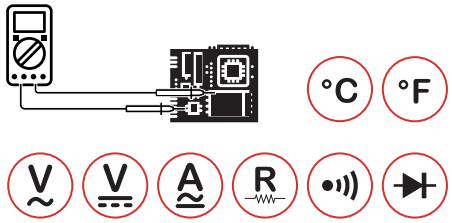

CONTENTS

188×92×50mm
7.4"×3.6"×2.0"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm


Carton Box
47×37.5×35.5cm

X 20PCS



CAT III 600V

MAIN APPLICATIONS

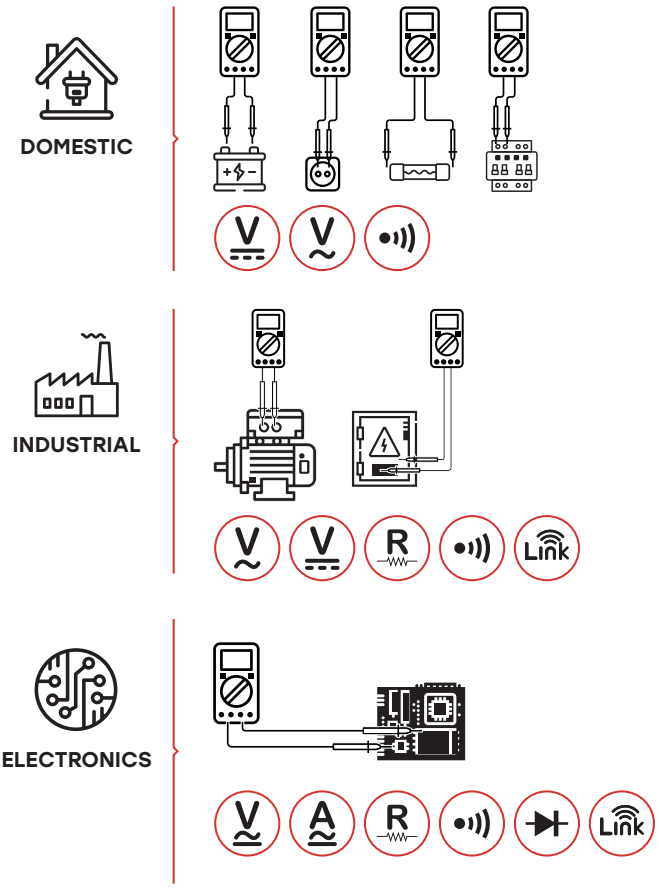

DIGITAL MULTIMETER WITH WIRELESS

MS8361D

SKU NO.: MS8361DCBGLO
UPC CODE: 810053675366
EAN CODE: 8435394783406

FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- True RMS For AC Voltage & AC Current.
- Wireless APP connection.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Continuity **<50Ω**
Capacitance **99.99mF**	Frequency **10kHz**	Display Counts **4000**

CONTENTS

188×92×50mm
7.4"×3.6"×2.0"
380g/0.83lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT II 1000V
CAT III 600V

DIGITAL MULTIMETER

MY68

SKU NO.: MY68CBGLO
UPC CODE: 810053672457
EAN CODE: 8435394778099


FEATURE

- Auto Power Off.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.
- Data Hold.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **10A**
DC Current **400mA**	Resistance **40MΩ**	Capacitance **200μF**
Frequency **100kHz**	Continuity **<50Ω**	Display counts **4000**

MAIN APPLICATIONS

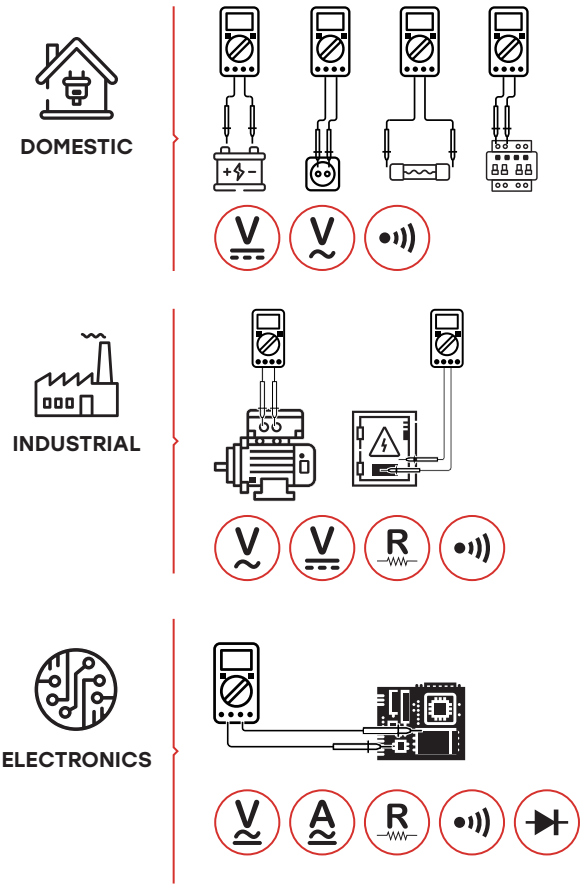

CONTENTS

189×91×31.5mm
7.67"×3.6"×1.24"
310g/0.5lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL MULTIMETER

MY78

SKU NO.: MY78CBGLO
UPC CODE: 810053674550
EAN CODE: 8435394779621


FEATURE

- Auto & Manual Ranging.
- Relative Measurement.
- Diode Open Voltage 1.5V.
- Transistor hFE 0~1000.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Capacitance **200μF**
Frequency **>200kHz**	Continuity **<50±20Ω**	Display Counts **4000**

MAIN APPLICATIONS

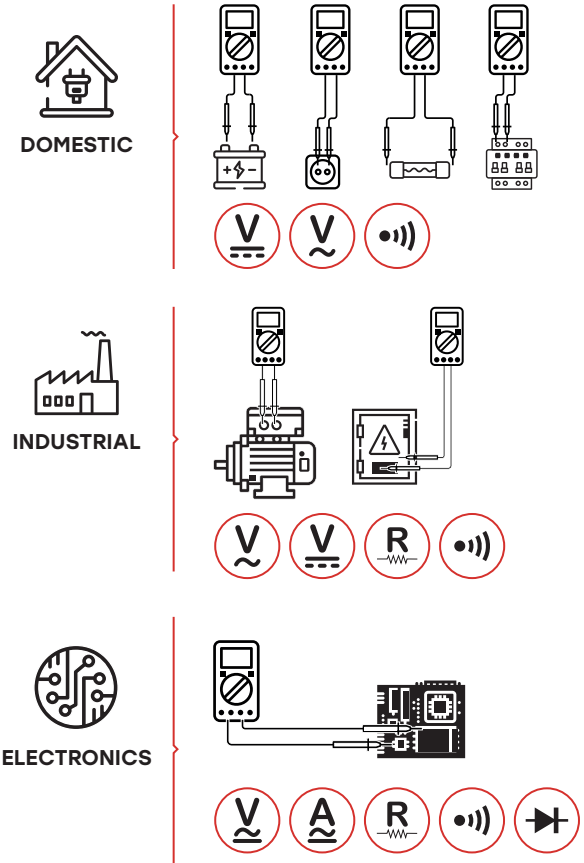

CONTENTS

189×91×31.5mm
7.67"×3.6"×1.24"
420g/0.92lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



POCKET DIGITAL MULTIMETER

M300

SKU NO.: M300CBGLO
UPC CODE: 810053672082
EAN CODE: 8435394777818


FEATURE

- Pocket format that facilitates product portability.
- Test leads integrated which facilitates its use and storage.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **200mA**
Resistance **2MΩ**	Display Counts **2000**	Continuity **<50±20Ω**

MAIN APPLICATIONS

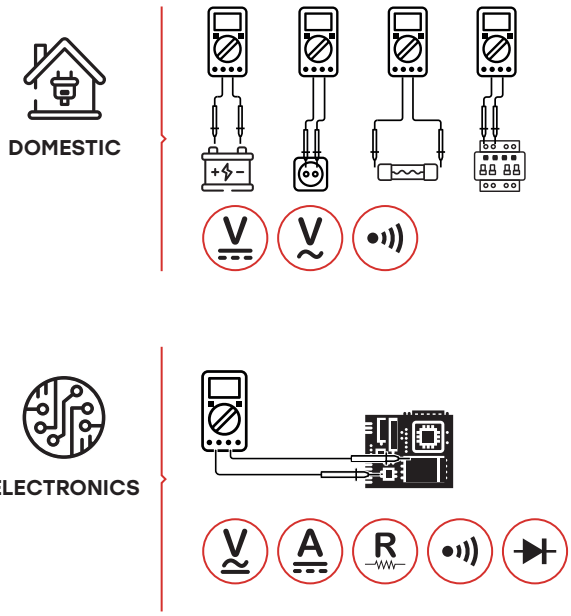

CONTENTS

120×70×18mm
4.7"×2.75"×0.7"
110g/0.23lb

1x12V A23S Battery

ACCESSORIES
Test leads
Carry bag

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L95xW35xH154mm

Carton Box
37x32.8x21.5cm

X 40PCS



CAT III 600V

POCKET DIGITAL MULTIMETER

M320

SKU NO.: M320CBGLO
UPC CODE: 810053674048
EAN CODE: 8435394779119


FEATURE

- Auto Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- Data Hold.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **400mA**
DC Current **400mA**	Resistance **40MΩ**	Frequency **100kHz**
Display Counts **4000**	Continuity **<50±20Ω**	

MAIN APPLICATIONS

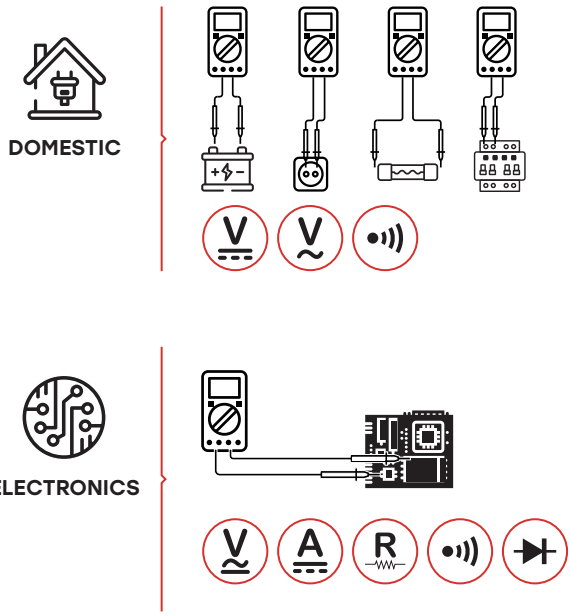

CONTENTS

120×70×18mm
4.7"×2.75"×0.7"
110g/0.23lb

2×1.5V 357A(LR44)
Batteries

ACCESSORIES
Test leads
Carry bag

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L95xW35xH154mm


Carton Box
37x32.8x21.5cm

X 40PCS



CAT III 600V

MAIN APPLICATIONS

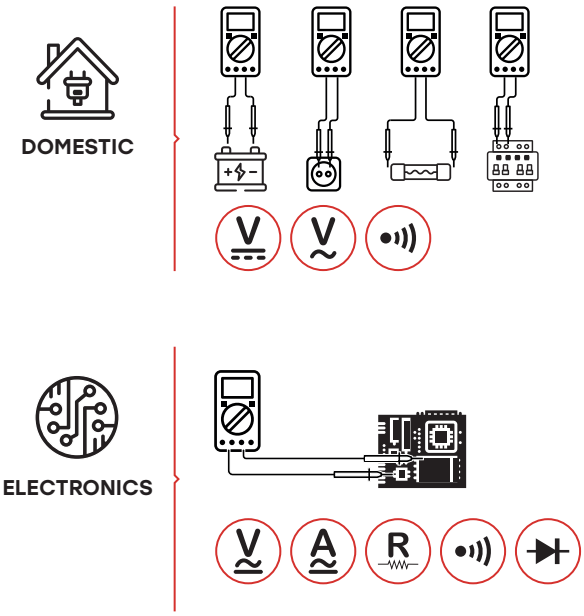

CONTENTS

122×62×44mm
4.8"×2.44"×1.73"
186g/0.4lb

2×1.5V AAA Batteries

ACCESSORIES
Test leads
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS

POCKET DIGITAL MULTIMETER

MS8333A

SKU NO.: MS8333ACBGLO
UPC CODE: 810053674482
EAN CODE: 8435394779553

FEATURE

- Auto Ranging.
- Auto Power Off.
- True RMS For AC Voltage & AC Current.
- Non-Contact Voltage Detector.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **600mA**
DC Current **600mA**	Resistance **60MΩ**	Continuity **<50±20Ω**
Capacitance **600uF**	Frequency **10kHz**	Display Counts **6000**



PEN-TYPE DIGITAL MULTIMETER

MS8211

SKU NO.: MS8211CBGLO
UPC CODE: 810053673010
EAN CODE: 8435394778976


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- Maximum Value Hold.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	Resistance 20MΩ
Continuity <50±20Ω	Display Counts 2000	

MAIN APPLICATIONS

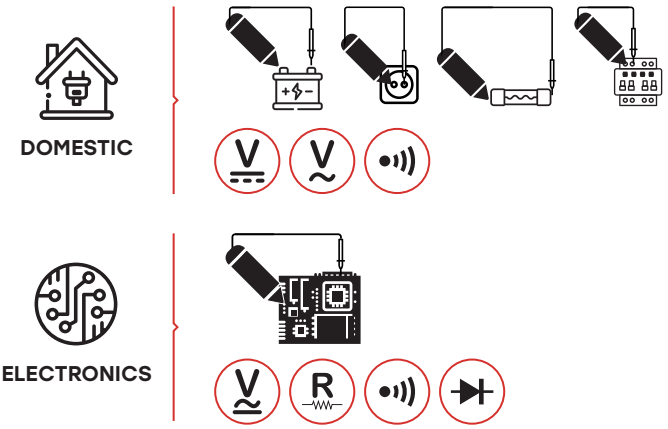

CONTENTS

208×38×29mm
8.26"×1.5"×1.1"
110g/0.24lb

2×1.5V AAA Batteries

ACCESSORIES
Test leads
Alligator Clips
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L85×W45×H220mm

Carton Box
46×26×36cm

X 40PCS



PEN-TYPE DIGITAL MULTIMETER

MS8211D

SKU NO.: MS8211DCBGLO
UPC CODE: 810053672655
EAN CODE: 8435394778747


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- Maximum Value Hold.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **200mA**
DC Current **200mA**	Resistance **20MΩ**	Continuity **<50±20Ω**
Display Counts **2000**		

MAIN APPLICATIONS

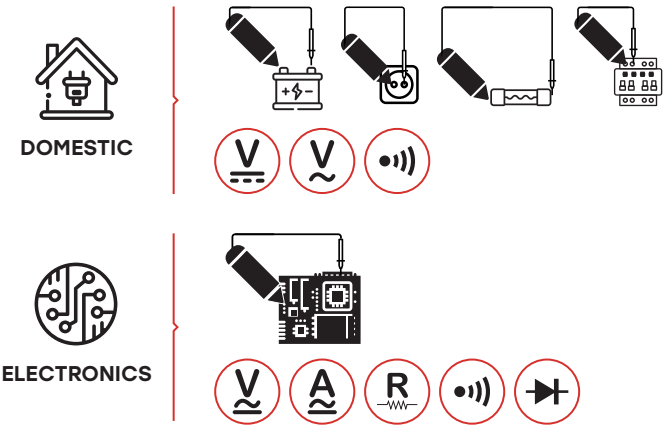

CONTENTS

208×38×29mm
8.26"×1.5"×1.1"
110g/0.24lb

2×1.5V AAA Batteries

ACCESSORIES
Test leads
Alligator Clips
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L85×W45×H220mm

Carton Box
46×26×36cm

X 40PCS



PEN-TYPE DIGITAL MULTIMETER

MS8212A

SKU NO.: MS8212ACBGLO
UPC CODE: 810053673034
EAN CODE: 8435394778761


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- Maximum Value Hold.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **200mA**
DC Current **200mA**	Resistance **20MΩ**	Continuity **<50±20Ω**
Display Counts **2000**		

MAIN APPLICATIONS

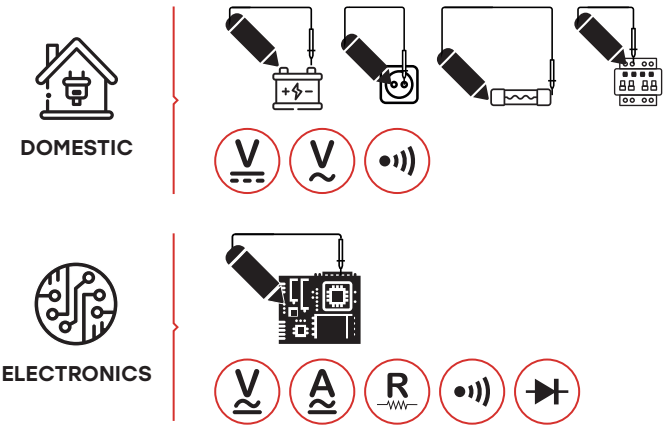

CONTENTS

238×43×29mm
9.37"×1.7"×1.1"
112g/0.28lb

2×1.5V AAA Batteries

ACCESSORIES
Test leads
Alligator Clips
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L85×W45×H236mm

Carton Box
49×28×37cm

X 40PCS



CAT III 600V

DIGITAL MULTIMETER

MS8223A

SKU NO.: MS8223ACBGLO
UPC CODE: 810053672211
EAN CODE: 8435394777931

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- Maximum Value Hold.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **200mA**
DC Current **200mA**	Resistance **20MΩ**	Continuity **<50Ω**
Display Counts **2000**		

MAIN APPLICATIONS

DOMESTIC

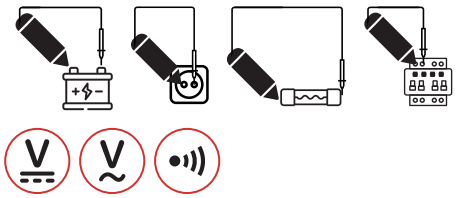

ELECTRONICS

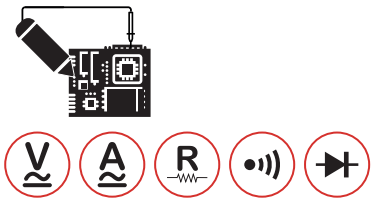

CONTENTS

225×52×40mm
8.86"×2.0"×1.58"
138g/0.3lb

2×1.5V AAA Batteries

ACCESSORIES
Test leads
Alligator Clips
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L85×W50×H236mm

Carton Box
49×28×37cm

X 40PCS



MULTI-FUNCTION DIGITAL COUNTER

MS6100

SKU NO.: MS6100CBGLO
UPC CODE: 810053675199
EAN CODE: 8435394783185


FEATURE

- Operating Temperature 0°C~40°C.
- Storage Temperature -10°C~50°C.
- Relative Humidity 20%~80%RH (0°C~40°C).
- Data Hold.

SPECIFICATIONS

A Input	B Input	Display Counts
10~100MHz	100~1300MHz	2200

MAIN APPLICATIONS

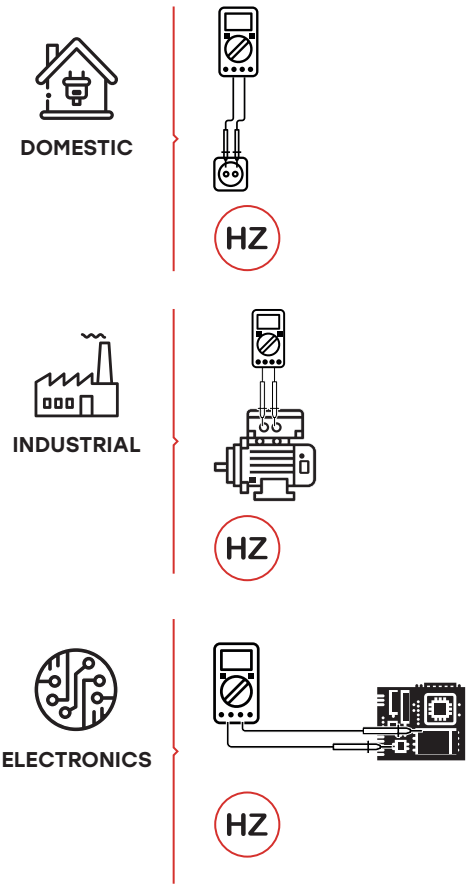

CONTENTS

300×260×74mm
11.8"×10.2"×2.9"
1850g/4.02lb

220V/110V AC

ACCESSORIES
BNC to BNC Test Lead
(50 ohm, 100cm)
Power Cord

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L320×W140×H310mm

Carton Box
59×34×34.5cm

X 4PCS



TRUE RMS BENCHTOP MULTIMETER

MS8040

SKU NO.: MS8040CBGLO
UPC CODE: 810053672631
EAN CODE: 8435394778273

FEATURE


- Auto & Manual Ranging.
- True RMS for AC Voltage & AC Current.
- Low Pass Filter (1kHz) for AC Voltage & AC Current.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **200MΩ**	Capacitance **20mF**
Display Counts **22000**		

MAIN APPLICATIONS

ELECTRONICS



CONTENTS

238×230×83mm
9.4"×9.1×3.3"
1500g/3.4lb

220V/110V AC
(50~60Hz)

ACCESSORIES
Test Leads
K Type Thermocouple
Multi-function socket
RS232C Cable
Power cord
Software CD
Carrying strap

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L300×W110×H280mm

Carton Box
58.5×32×29.5cm

X 5PCS



TRUE RMS BENCHTOP MULTIMETER

MS8050

SKU NO.: MS8050CBGLO
UPC CODE: 810053674390
EAN CODE: 8435394779461

FEATURE


- True RMS.
- dBm Measurement.
- Relative Measurement.
- Diode Open Voltage 3.3V.

SPECIFICATIONS

AC Voltage **1000V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **50MΩ**	Capacitance **5000μF**
Display Counts **53000**		

MAIN APPLICATIONS

ELECTRONICS



CONTENTS

350×240×100mm
13.8"×9.5"×3.9"
2500g/5.5lb

220V/110V AC

ACCESSORIES
Test leads
Alligator clip
Power cord
RS232C cable
Software CD
Carry case

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L465×W140×H320mm

Carton Box
48.5×30×35cm

X 2PCS



CE

Intertek

RoHS

CAT III 1000V

DIGITAL INSULATION MULTIMETER

MS5208

SKU NO.: MS5208CBGLO
UPC CODE: 810053673065
EAN CODE: 8435394778792

FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- True RMS For AC Voltage & AC Current.
- DAR/PI Mod.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 400mA
DC Current 400mA	DC Output 1000V	Resistance 66MΩ
Capacitance 66mF	Frequency 10kHz	Continuity <30Ω
Display Counts 6600	Temperature -30°C~1300°C/-22°F~2372°F	

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

ELECTRONICS

CONTENTS

205×102×58mm
8.1"×4.0"×2.3"
390g/0.86lb

4×1.5V AA Batteries

ACCESSORIES
Test Leads
Test Clips
K Type Thermocouple
Multi-function socket
Carry Bag
Battery

Calibration Certificate

QSG Quick Start Guide

PACKAGING INFORMATION

Color Box
L172×W80×H255mm

Carton Box
53×44.5×37cm

X 20PCS



DIGITAL MULTIMETER WITH ENVIRONMENT 4 IN 1

MS8209

SKU NO.: MS8209CBGLO
UPC CODE: 810053672648
EAN CODE: 8435394778280

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- Relative Measurement.

SPECIFICATIONS


AC Voltage 600V	DC Voltage 600V	AC Current 10A
DC Current 10A	Resistance 40MΩ	Capacitance 200μF
Frequency >200kHz	Continuity <40Ω	Display Counts 4000
Temperature -20°C~1000°C		

MAIN APPLICATIONS


DOMESTIC



INDUSTRIAL

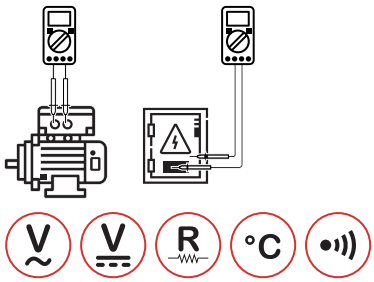

ELECTRONICS

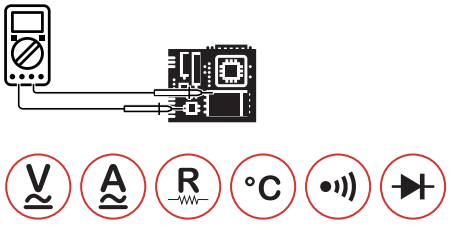

CONTENTS

158×78×39mm
6.2"×3.1"×1.5"
260g/0.55lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
K type thermocouple
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L188×W88×H264mm

Carton Box
55×48.5×39.5cm

X 20PCS



DIGITAL MULTIMETER WITH ENVIRONMENT 5 IN 1

MS8229

SKU NO.: MS8229CBAGLO
UPC CODE: 810053672327
EAN CODE: 8435394778433


FEATURE

- Hinged Bracket Facilitate Table Work.
- Auto-Ranging, Relative, Humidity, Luminosity & Sound level.
- For Professional Use.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Capacitance **100uF**
Frequency **>200kHz**	Continuity **<50±20Ω**	Display Counts **4000**
Temperature **-20°C~1000°C/-4°F~1832°F**		

MAIN APPLICATIONS

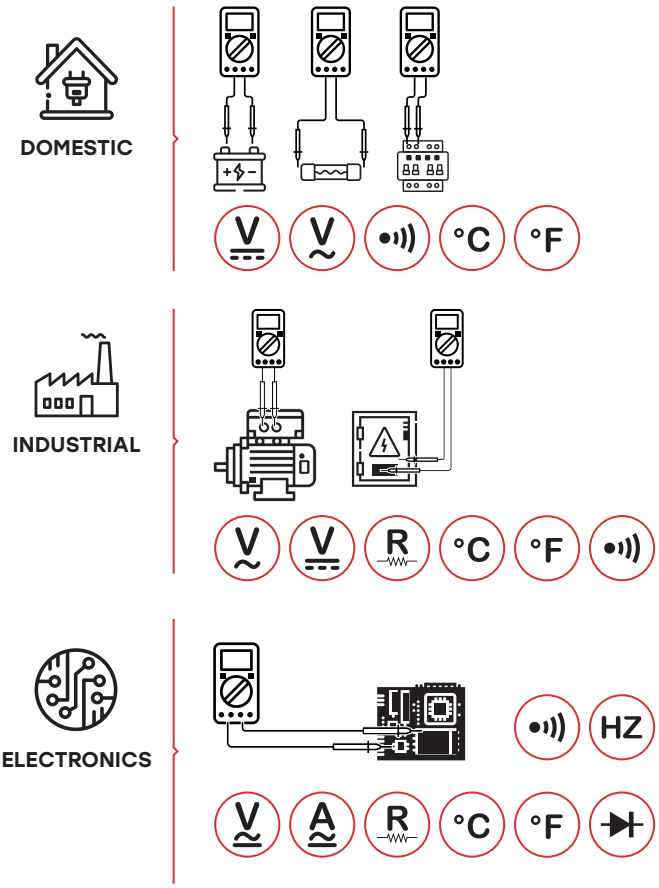

CONTENTS

195×92×55mm
7.7"×3.6"×2.2"
390g/0.86lb

3×1.5V AAA Batteries

ACCESSORIES
Test leads
K type thermocouple
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



CAT III 600V

DIGITAL MULTIMETER WITH LAN/PHONE/ TONE TESTER

MS8236

SKU NO.: MS8236CBGLO
UPC CODE: 810053673003
EAN CODE: 8435394778624


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Diode Open Voltage 1.7V.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **20MΩ**	Continuity **<70Ω**
Display counts **2000**		

MAIN APPLICATIONS

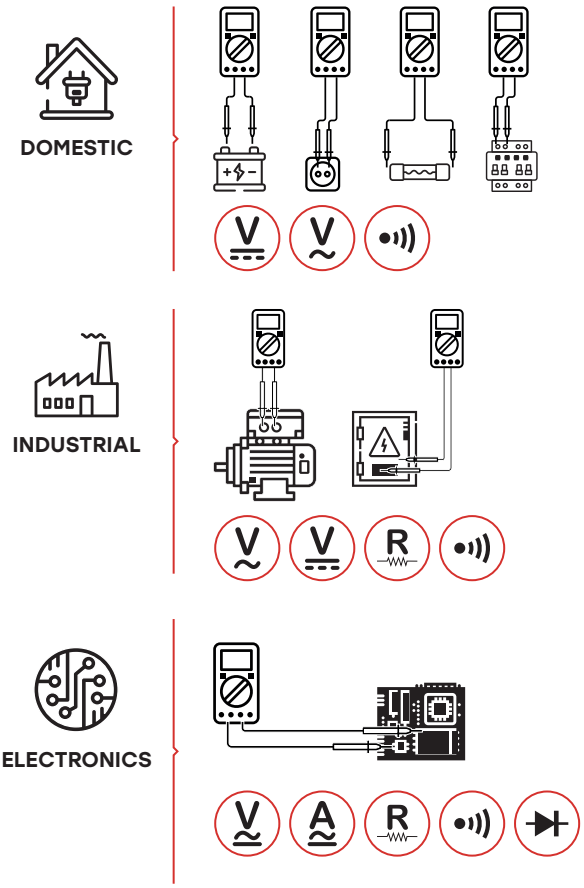

CONTENTS

MS8236:
195×92×55mm
7.7"×3.6"×2.2"
470g/1.04lb

MS6812R:
238×43×26mm
9.4"×1.7"×1.0"

ACCESSORIES
Test leads
Detection connect line
Battery

2×9V 6F22
Batteries

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L188×W88×H264mm

Carton Box
55×48.5×39.5mm

X 40PCS



DIGITAL MULTIMETER (ENGINE ANALYZER)

MS8239D

SKU NO.: MS8239DCBGLO
UPC CODE: 810053672983
EAN CODE: 8435394778716


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 2.7V.
- Maximum Measurement.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **10A**
DC Current **10A**	Resistance **40MΩ**	Continuity **<50Ω**
Display Counts **2000**		

MAIN APPLICATIONS

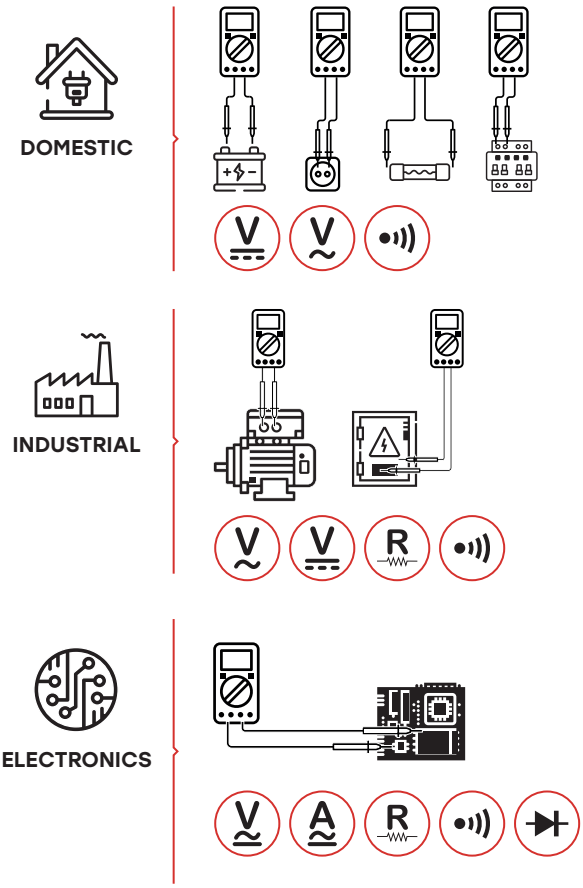

CONTENTS

150×74×41mm
5.9"×2.9"×1.6"
202g/0.44lb

2×1.5V AAA Batteries

ACCESSORIES
Test leads
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L145×W60×H188mm


Carton Box
40×32×31.5cm

X 20PCS



CAT III 600V

MAIN APPLICATIONS

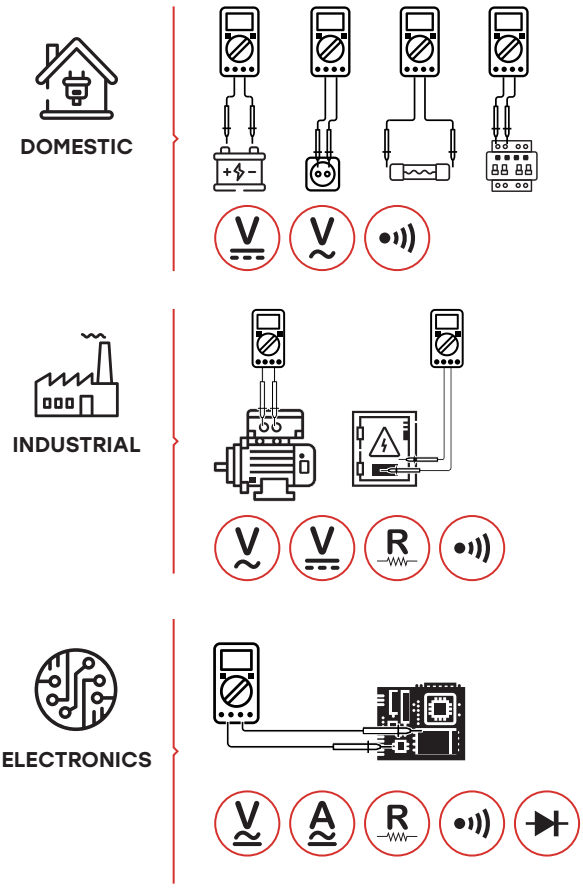

DIGITAL MULTIMETER

MS8265

SKU NO.: MS8265CBGLO
UPC CODE: 810053674772
EAN CODE: 8435394779836

FEATURE

- Auto Power Off.
- Sound & Light Warning.
- Transistor hFE 0~1000.
- Diode Open Voltage 3.0V.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **10A**
DC Current **10A**	Resistance **200MΩ**	Continuity **<70Ω**
Capacitance **200μF**	Frequency **20kHz**	Display Counts **20000**

CONTENTS

195×92×55mm
7.7"×3.6"×2.2"
400g/0.9lb

1×9V 6F22
Battery

ACCESSORIES
Test leads
Multi-function socket
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS

DIGITAL CLAMP METERS

AC CURRENT | AC/DC CURRENT | LEAKAGE | POWER
SPECIAL APPLICATION





CAT II 1000V
CAT III 600V

DIGITAL AC ELECTRICAL TESTER

M266

SKU NO.: M266CBGLO
UPC CODE: 810053673287
EAN CODE: 8435394779010

FEATURE


- Data Hold.
- Low Battery Display.

SPECIFICATIONS


AC Voltage 750V	DC Voltage 1000V	AC Current 1000A
Resistance 20kΩ	Display Counts 2000	Continuity <100Ω
Jaw Opening 50mm/2.0"		

MAIN APPLICATIONS

DOMESTIC

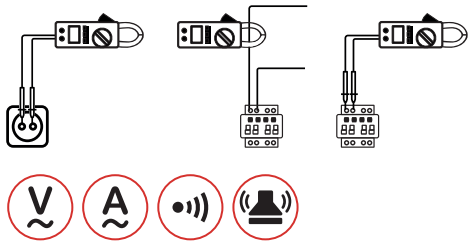

INDUSTRIAL

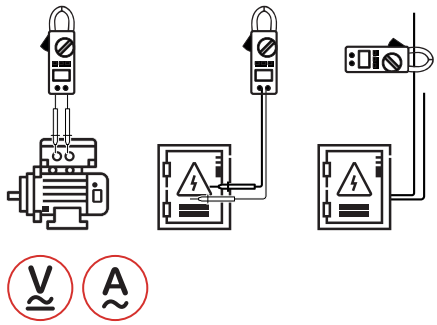

CONTENTS



235×96×46mm
9.25"×3.8"×1.8"
268g/0.59lb

1×9V 6F22 Battery

ACCESSORIES

Test Leads
Carry bag
Battery

Calibration Certificate

QSG

Quick Start Guide

PACKAGING INFORMATION



Color Box
L130×W63×H255mm



Carton Box
53×34×28.5cm



X20PCS



CAT II 1000V
CAT III 600V

DIGITAL CLAMP TRANSDUCER

M266C

SKU NO.: M266CCBGLO
UPC CODE: 810053672471
EAN CODE: 8435394778112


FEATURE

- Data Hold.
- Low Battery Display.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 1000A
Resistance 2MΩ	Display Counts 2000	Continuity <100Ω
Jaw Opening 12mm/0.5"	Temperature 0°C~750°C/32°F~1382°F	

MAIN APPLICATIONS

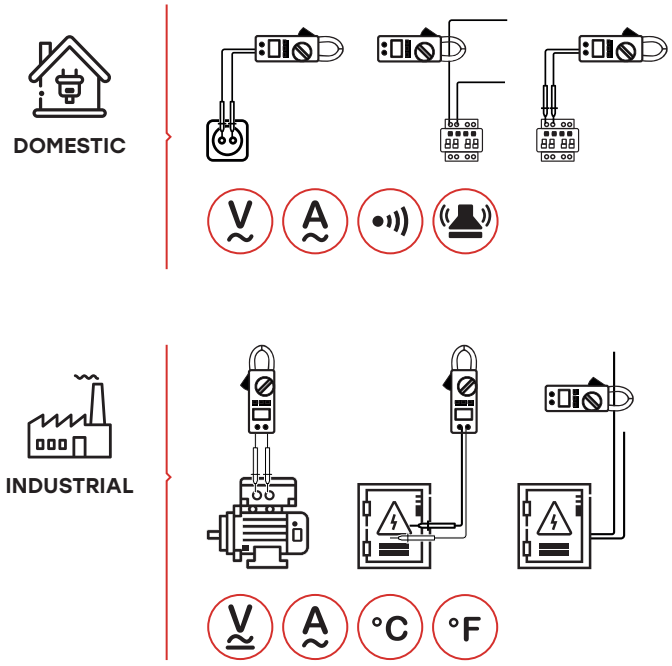

CONTENTS

235×96×46mm
9.25"×3.8"×1.8"
268g/0.59lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm


Carton Box
53×34×28.5cm

X20PCS



CAT II 1000V
CAT III 600V

MAIN APPLICATIONS

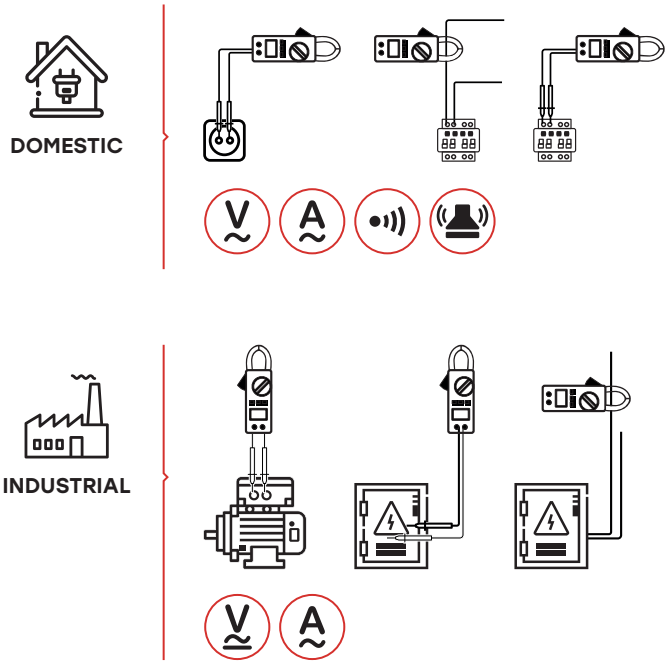

DIGITAL AC CLAMP METER

M266F

SKU NO.: M266FCBGLO
UPC CODE: 810053672488
EAN CODE: 8435394778129

FEATURE

- Diode open voltage 2.7V.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
Resistance **2MΩ**	Frequency **2kHz**	Display Counts **2000**
Continuity **<100Ω**	Jaw Opening **12mm/0.5"**	

CONTENTS

235×96×46mm
9.25"×3.8"×1.8"
268g/0.59lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5cm

X20PCS



CAT II 1000V

DIGITAL AC CLAMP METER

MS2000G

SKU NO.: MS2000GCBGLO
UPC CODE: 810053674093
EAN CODE: 8435394779164


FEATURE

- Diode Open Voltage 3.0V.
- Data Hold.
- Display Backlight.
- Low Battery Display.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 1000A
Resistance 2MΩ	Frequency 20kHz	Display Counts 2000
Jaw Opening 55mm/2.2"	Continuity <60Ω	
Temperature -0°C~750°C/32°F~1382°F		

MAIN APPLICATIONS

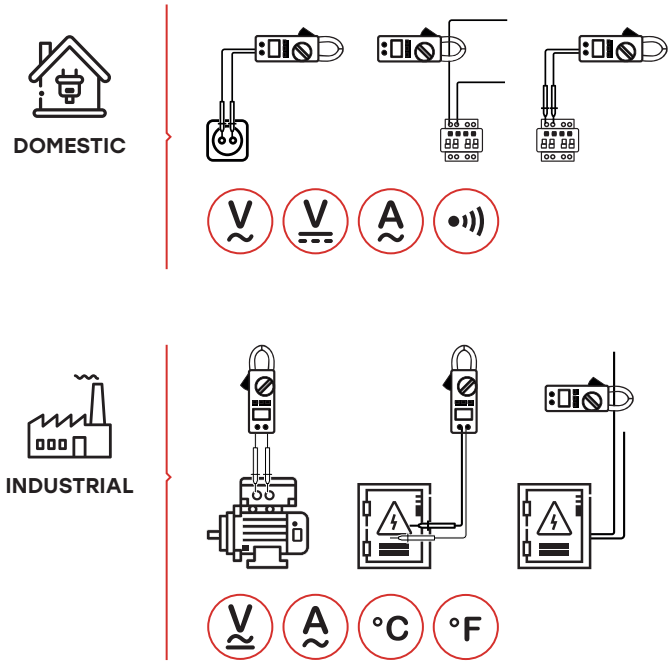

CONTENTS

282×104×47mm
11"×4.1"×1.85"
570g/1.26lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads
Wrapping Case
K type thermocouple
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L300×W65×H250mm

Carton Box
61.5×37×27cm

X 10PCS



DIGITAL AC CLAMP METER

MS2001

SKU NO.: MS2001CBGLO
UPC CODE: 810053672341
EAN CODE: 8435394778044


FEATURE

- Diode Open Voltage 3.0V.
- Data Hold.
- Display Backlight.
- Low Battery Display.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
Resistance **2000Ω**	Display Counts **2000**	Jaw Opening **42mm/1.7"**
Continuity **<60Ω**		

MAIN APPLICATIONS

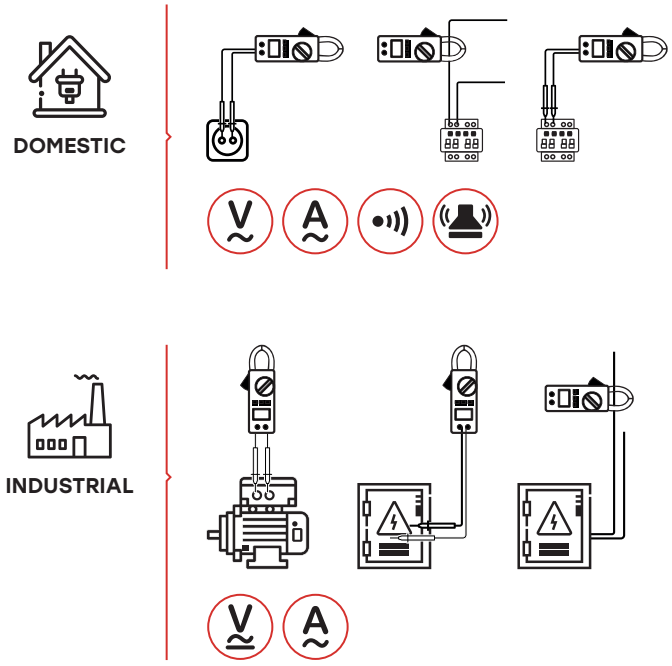

CONTENTS

250×99×43mm
9.8"×3.9"×1.7"
416g/0.92lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Wrapping Case
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W60×H300mm

Carton Box
35.5×33×29cm

X 10PCS



CAT II 1000V
CAT III 600V

DIGITAL AC CLAMP METER

MS2001C

SKU NO.: MS2001CCBGLO
UPC CODE: 810053674109
EAN CODE: 8435394783055


FEATURE

- Data Hold.
- Display Backlight.
- Low Battery Display.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
Resistance **2000Ω**	Display Counts **2000**	Jaw Opening **42mm/1.7"**
Continuity **<60Ω**	Temperature **-40°C~750°C**	

MAIN APPLICATIONS

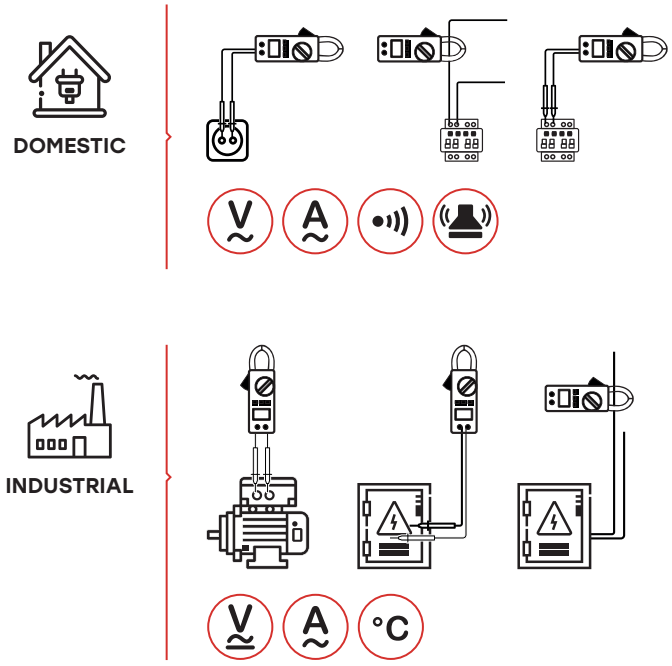

CONTENTS

250×99×43mm
9.8"×3.9"×1.7"
416g/0.92lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W60×H300mm

Carton Box
35.5×33×29cm

X 10PCS



CAT II 1000V
CAT III 600V

DIGITAL AC CLAMP METER

MS2001F

SKU NO.: MS2001FCBGLO
UPC CODE: 810053673218
EAN CODE: 84835394778945


FEATURE

- Data Hold.
- Diode and Continuity.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
Resistance **2000Ω**	Display Counts **2000**	Jaw Opening **42mm/1.7"**

MAIN APPLICATIONS

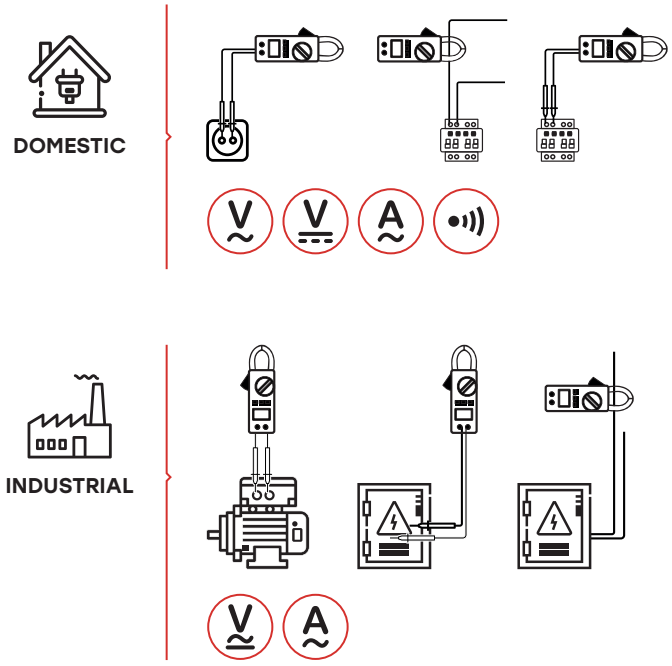

CONTENTS

250×99×43mm
9.8"×3.9"×1.7"
416g/0.92lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W60×H300mm

Carton Box
35.5×33×29cm

X 10PCS



CAT III 600V

DIGITAL AC CLAMP METER

MS2008B

SKU NO.: MS2008BCBGLO
UPC CODE: 810053674123
EAN CODE: 8435394779195

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Display 4000 Counts.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **600A**
Resistance **40MΩ**	Display Counts **4000**	Jaw Opening **26mm/1.0"**
Continuity **<50Ω**	Temperature **-20°C~750°C**	

MAIN APPLICATIONS

DOMESTIC

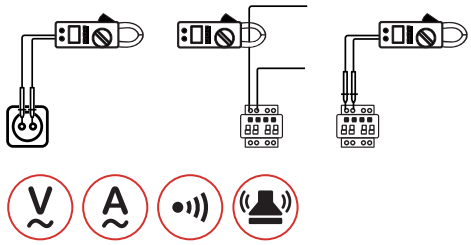

INDUSTRIAL

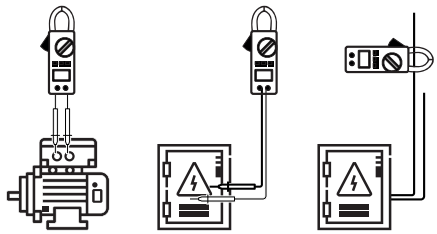

CONTENTS

208×78×35mm
8.18"×3.1"×1.4"
240g/0.4lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC CLAMP METER

MS2009A

SKU NO.: MS2009ACBGLO
UPC CODE: 810053672549
EAN CODE: 8435394778181


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Diode Open Volatge 1.5V.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **600A**
Resistance **20MΩ**	Display Counts **2000**	Jaw Opening **26mm/1.0"**
Continuity **<60Ω**		

MAIN APPLICATIONS

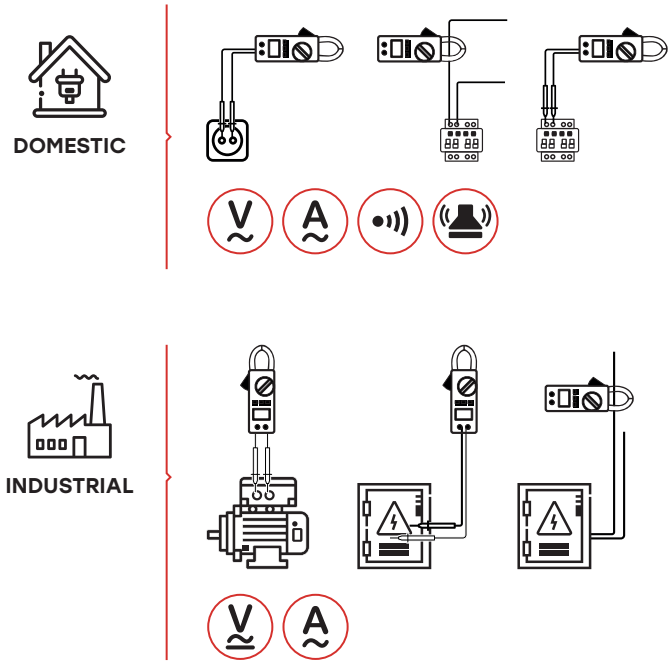

CONTENTS

218×78×35mm
8.9"×3.1"×1.4"
239g/0.53lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC CLAMP METER

MS2009C

SKU NO.: MS2009CCBGLO
UPC CODE: 810053674130
EAN CODE: 8435394779201


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Diode Open Volatge 3.2V.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **600A**
Resistance **60MΩ**	Capacitance **60mF**	Frequency **1kHz**
Display Counts **6000**	Jaw Opening **26mm/1.0"**	Continuity **<50Ω**
Temperature **-20°C~1000°C/-4°F~1832°F**		

MAIN APPLICATIONS

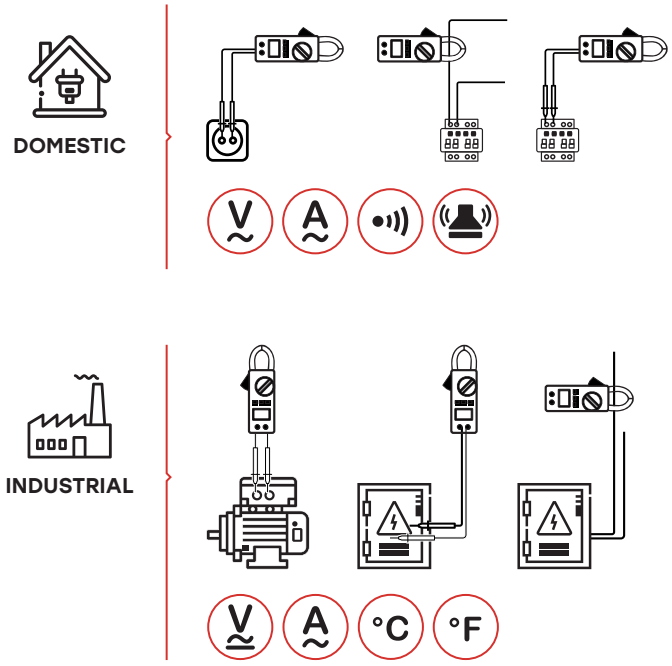

CONTENTS

218×78×35mm
8.9"×3.1"×1.4"
239g/0.53lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



CAT III 1000V
CAT IV 600V

DIGITAL AC CLAMP METER

MS2025A

SKU NO.: MS2025ACBGLO
UPC CODE: 810053674147
EAN CODE: 8435394779218

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Relative Measurement.

SPECIFICATIONS


AC Voltage 750V	DC Voltage 1000V	AC Current 1000A
Resistance 60MΩ	Capacitance 100mF	Frequency 10kHz
Display Counts 6000	Jaw Opening 40mm/1.6"	Continuity <50Ω

MAIN APPLICATIONS

DOMESTIC

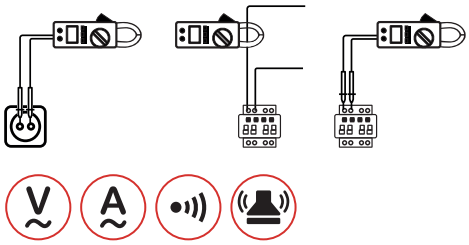

INDUSTRIAL

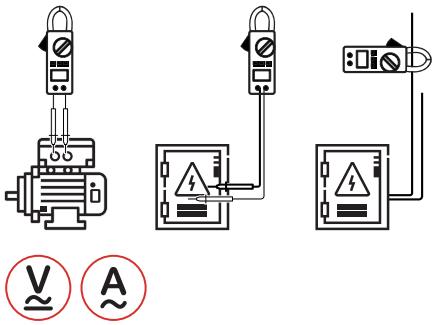

CONTENTS



238×92×50mm
9.37"×3.6"×1.9"
390g/0.86lb



1×9V 6F22
Battery



ACCESSORIES

Test Leads
Carry bag
Battery



Calibration
Certificate



Quick Start
Guide

PACKAGING INFORMATION



Color Box
L130×W63×H255mm



Carton Box
53×34×28.5cm



X 20PCS



DIGITAL AC CLAMP METER

MS2025C

SKU NO.: MS2025CCBGLO
UPC CODE: 810053674635
EAN CODE: 8435394779690


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Relative Measurement.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 1000A
Resistance 66MΩ	Capacitance 66mF	Ccontinuity <50Ω
Frequency(A) 660Hz	Frequency(V) 6.6kHz	Display Counts 6600
Jaw Opening 40mm/1.6"	Temperature -20°C~1000°C/-4°F~1832°F	

MAIN APPLICATIONS

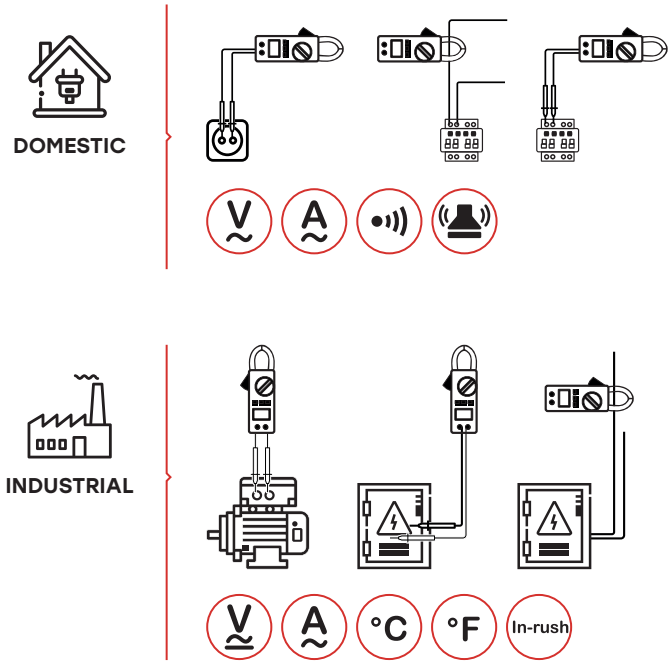

CONTENTS



238×92×50mm
9.37"×3.6"×1.9"
390g/0.86lb



1×9V 6F22
Battery



Test Leads
K-type thermocouple
Carry bag
Battery



Calibration
Certificate



Quick Start
Guide

PACKAGING INFORMATION



Color Box
L130×W63×H255mm



Carton Box
53×34×28.5cm



X 20CS



DIGITAL AC CLAMP METER

MS2026R

SKU NO.: MS2026RCBGLO
UPC CODE: 810053676776
EAN CODE: 8435394785301


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 3.3V.
- Low Battery Display.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	DC Current 1000A
Resistance 60MΩ	Capacitance 4000μF	Frequency 10kHz
Display Counts 6000	Jaw Opening 40mm/1.6"	Continuity <50±20Ω

MAIN APPLICATIONS

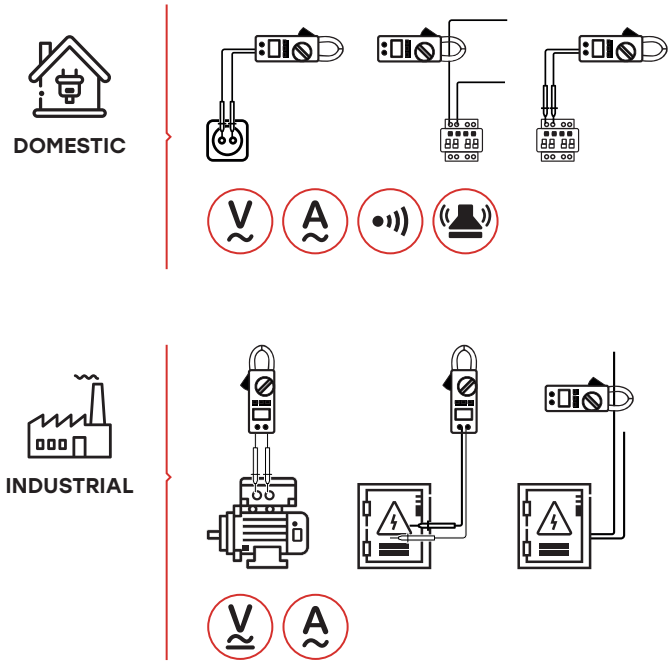

CONTENTS

222×86×32mm
8.74"×3.38"×1.26"
323g/0.71lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5cm

X 20PCS



CAT III 600V

DIGITAL AC CLAMP METER

MS2028A

SKU NO.: MS2028ACBGLO
UPC CODE: 810053674642
EAN CODE: 8435394779706


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 1.5V.
- True Root Mean Square.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	DC Current **600A**
Resistance **20MΩ**	Display Counts **2000**	Jaw Opening **26mm/1.0"**
Continuity **<50Ω**		

MAIN APPLICATIONS

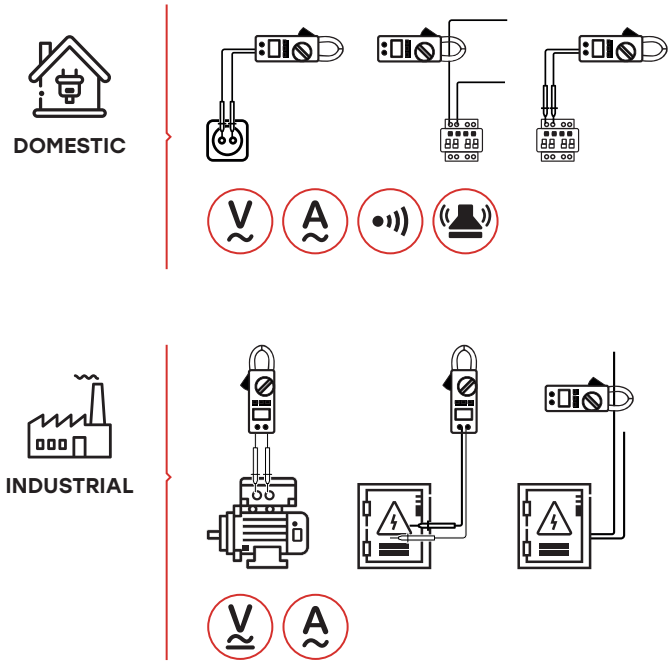

CONTENTS

208×78×35mm
8.2"×3.1"×1.4"
245g/0.54lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC CLAMP METER

MS2030

SKU NO.: MS2030CBGLO
UPC CODE: 810053672556
EAN CODE: 8435394778198


FEATURE

- Diode Open Voltage 4.5V.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **400A**
Resistance **2kΩ**	Display Counts **2000**	Jaw Opening **28mm/1.1"**
Continuity **<50±20Ω**		

MAIN APPLICATIONS

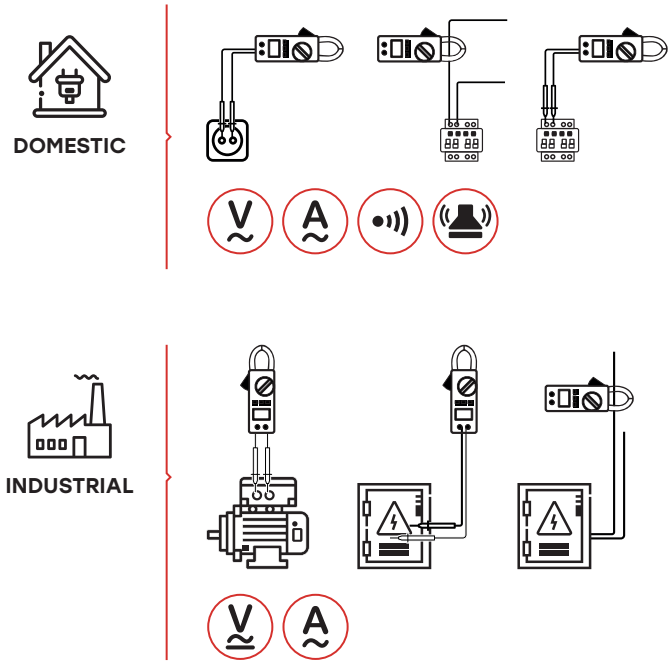

CONTENTS

198×79×38mm
7.8"×3.1"×1.5"
195g/0.43lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC CLAMP METER

MS2030B

SKU NO.: MS2030BCBGLO
UPC CODE: 810053674666
EAN CODE: 8435394779720


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Data Hold.
- Non-Contact Voltage Detector.

SPECIFICATIONS

AC Voltage 600V	DC Voltage 600V	AC Current 600A
Resistance 40MΩ	Capacitance 100μF	Frequency 10kHz
Display Counts 4000	Jaw Opening 28mm/1.1"	Continuity <50±20Ω
Temperature -20°C~1000°C/-4°F~1832°F		

MAIN APPLICATIONS

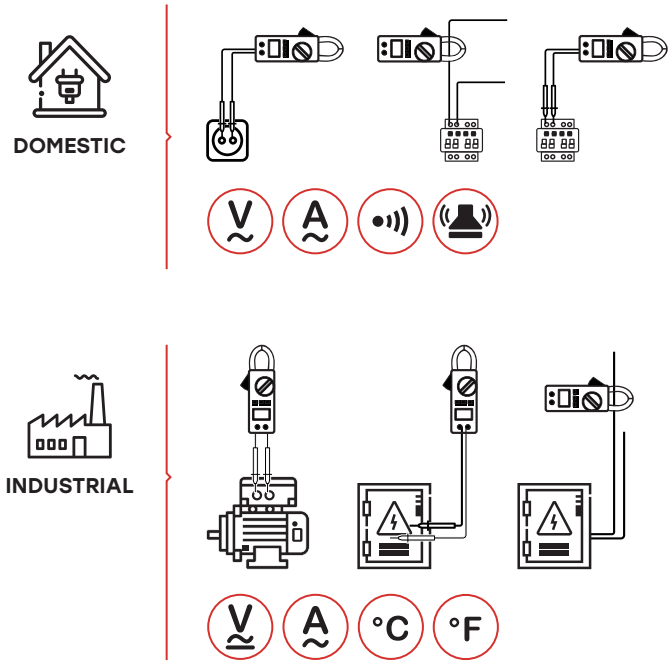

CONTENTS

198×79×38mm
7.8"×3.1"×1.5"
195g/0.43lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



SMART DIGITAL CLAMP METER

MS2033A

SKU NO.: MS2033ACBGLO
UPC CODE: 810053674932
EAN CODE: 8435394782676


FEATURE

- Auto Ranging.
- Auto Power Off.
- Dual Display.
- MAX/MIN.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **600A**
Resistance **10MΩ**	Frequency **3kHz**	Display Counts **6000**
Jaw Opening **26mm/1.0"**	Continuity **<40Ω**	

MAIN APPLICATIONS

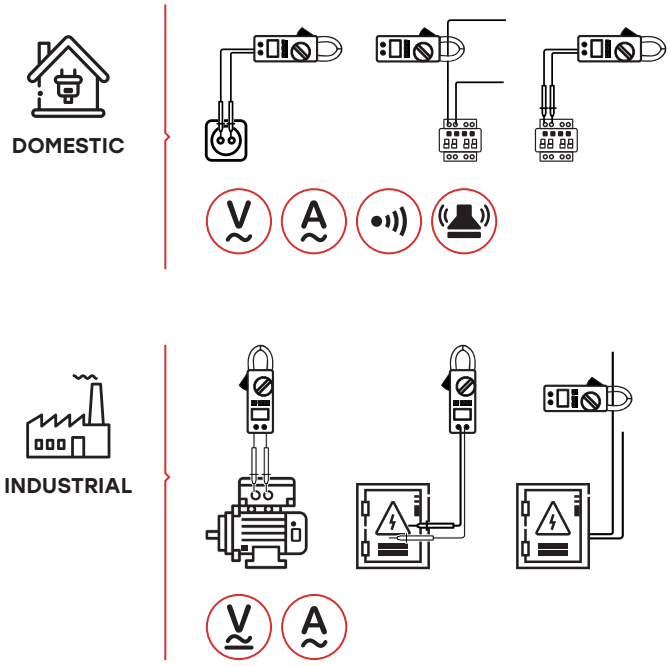

CONTENTS

204×78×43mm
8''×3.07''×1.77''
195g/0.43lb

3×1.5V AAA
Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC/DC CLAMP METER

MS2101

SKU NO.: MS2101CBGLO
UPC CODE: 810053672105
EAN CODE: 8435394777832

FEATURE


- Auto and Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 2.2V.
- Data Hold.

SPECIFICATIONS


AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
DC Current **1000A**	Resistance **40MΩ**	Capacitance **100μF**
Frequency **100kHz**	Display Counts **4000**	Jaw Opening **42mm/1.7"**
Continuity **<50Ω±20Ω**	Temperature **-40°C~750°C**	

MAIN APPLICATIONS

DOMESTIC

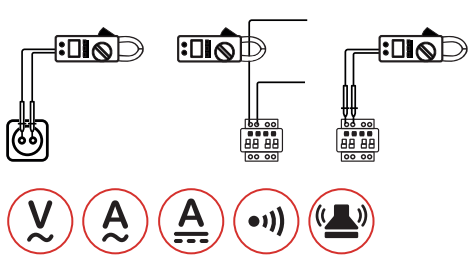

INDUSTRIAL

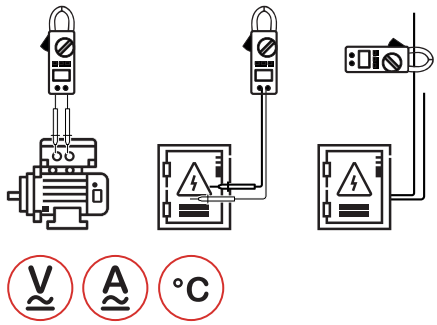

CONTENTS



250×99×43mm
9.8"×3.9"×1.7"
416g/0.92lb



1×9V 6F22
Battery

ACCESSORIES

Test Leads
K-type thermocouple
Carry bag
Battery



Calibration
Certificate



Quick Start
Guide

PACKAGING INFORMATION



Color Box
L130×W60×H300mm



Carton Box
35.5×33×29cm



X 10PCS



CAT III 600V

DIGITAL AC/DC CLAMP METER

MS2108

SKU NO.: MS2108CBGLO
UPC CODE: 810053673232
EAN CODE: 8435394778969


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Inrush 100ms Current Integral.
- True Root Mean Square.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **600A**
DC Current **600A**	Resistance **66MΩ**	Capacitance **66mF**
Frequency **1kHz**	Display Counts **6600**	

MAIN APPLICATIONS

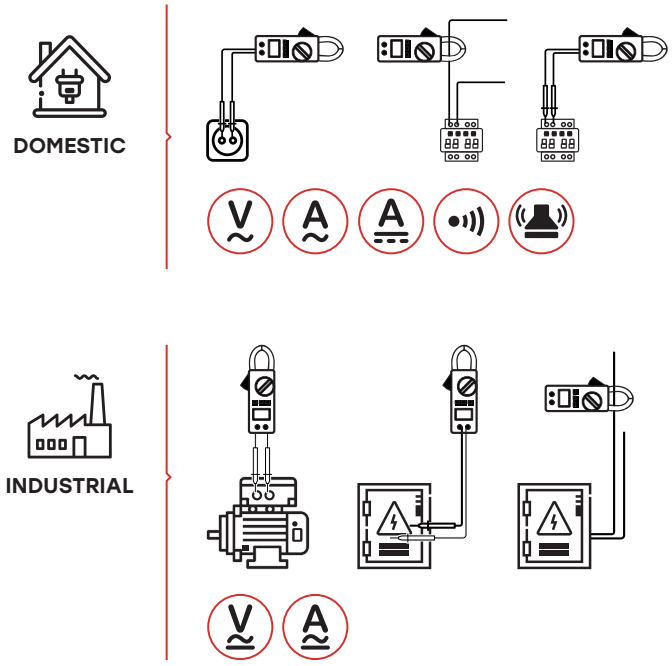

CONTENTS

208×78×53mm
8.2"×3.1"×1.4"
245g/0.54lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC/DC CLAMP METER

MS2109A

SKU NO.: MS2109ACBGLO
UPC CODE: 810053672112
EAN CODE: 8435394777849


FEATURE

- Auto Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Relative Measurement.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **600A**
DC Current **600A**	Resistance **60MΩ**	Capacitance **4000μF**
Frequency **10kHz**	Display Counts **6000**	Jaw Opening **26mm/1.0"**
Temperature **-20°C~1000°C/-4°F~1832°F**		Continuity **<50±20Ω**

MAIN APPLICATIONS

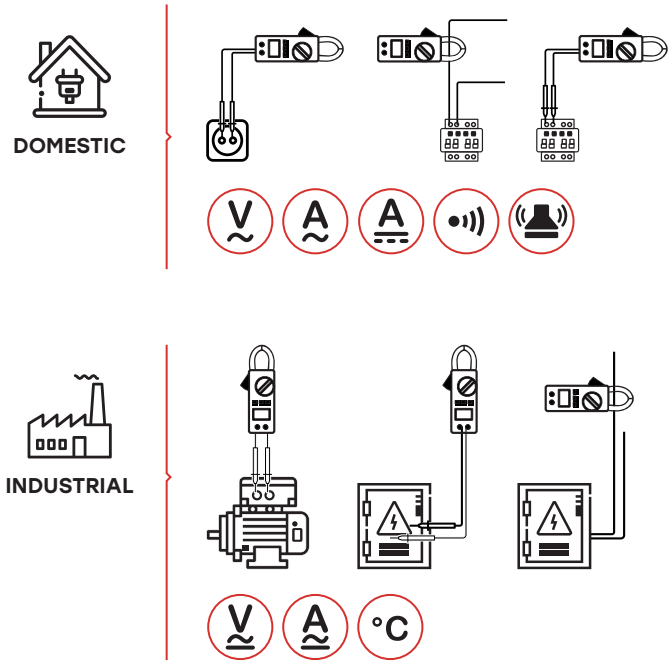

CONTENTS

218×78×35mm
8.9"×3.1"×1.4"
239g/0.53lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105xW55xH235mm

Carton Box
50×30.5×23cm

X 20PCS



CAT III 1000V
CAT IV 600V

DIGITAL AC/DC CLAMP METER

MS2125A

SKU NO.: MS2125ACBGLO
UPC CODE: 810053672129
EAN CODE: 8435394777856


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Relative Measurement.

SPECIFICATIONS

AC Voltage 750V	DC Voltage 1000V	AC Current 1000A
DC Current 1000A	Resistance 60MΩ	Capacitance 100mF
Frequency 1000Hz	Display Counts 6000	Jaw Opening 40mm/1.6"
Continuity <50Ω		

MAIN APPLICATIONS

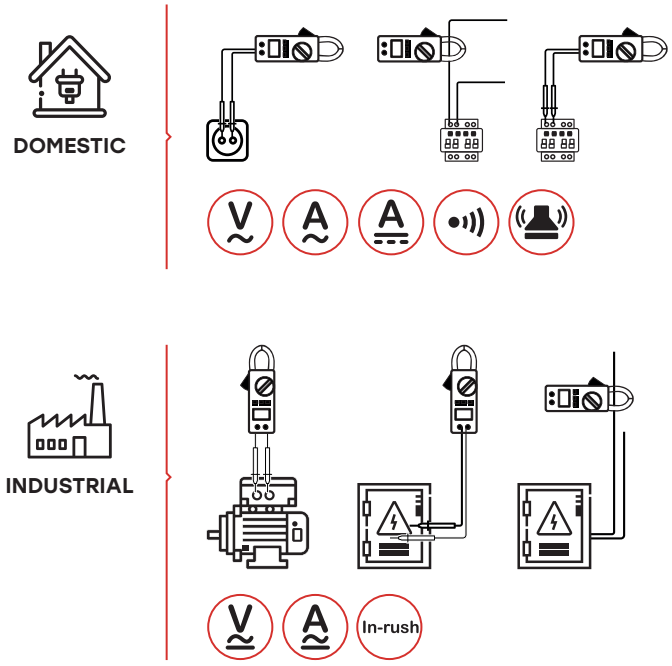

CONTENTS

238×92×50mm
9.37"×3.6"×1.9"
386g/0.85lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS



DIGITAL AC/DC CLAMP METER

MS2128

SKU NO.: MS2128CBGLO
UPC CODE: 810053674178
EAN CODE: 8435394779249


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Inrush 100ms Current Integral.
- True Root Mean Square.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **600A**
DC Current **600A**	Resistance **66MΩ**	Capacitance **66mF**
Frequency(A) **1kHz**	Frequency(V) **10kHz**	Display Counts **6600**
Jaw Opening **26mm/1.0"**	Continuity **<50±20Ω**	

MAIN APPLICATIONS

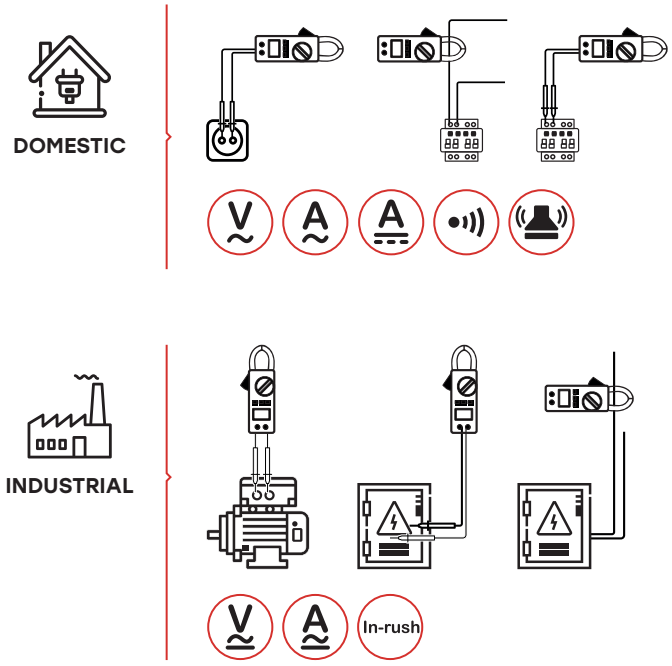

CONTENTS

208×78×53mm
8.2"×3.1"×1.4"
245g/0.54lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC/DC CLAMP METER

MS2128A

SKU NO.: MS2128ACBGLO
UPC CODE: 810053674673
EAN CODE: 8435394779737


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Relative measurement.
- Diode Open Voltage 3.0V.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **400A**
DC Current **400A**	Resistance **40MΩ**	Capacitance **4000μF**
Frequency(A) **1kHz**	Frequency(V) **10kHz**	Frequency(Hz) **10kHz**
Display Counts **4000**	Jaw Opening **26mm/1.0"**	Continuity **<50±20Ω**

MAIN APPLICATIONS

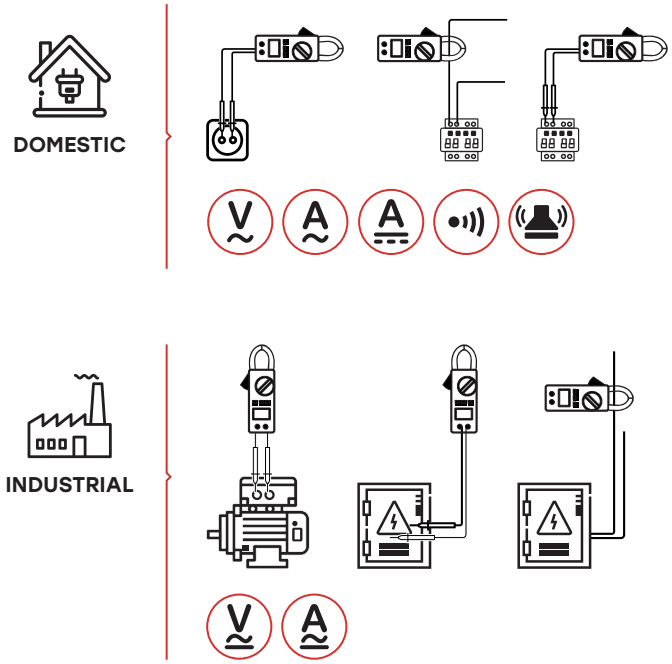

CONTENTS

208×78×53mm
8.2"×3.1"×1.4"
245g/0.54lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



DIGITAL AC/DC CLAMP METER

MS2138

SKU NO.: MS2138CBGLO
UPC CODE: 810053672136
EAN CODE: 8435394778464


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 2.8V.
- Relative Measurement.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **1000A**
DC Current **1000A**	Resistance **40MΩ**	Capacitance **4000μF**
Frequency **10kHz**	Display Counts **4000**	Jaw Opening **40mm/1.6"**
Continuity **<50±20Ω**		

MAIN APPLICATIONS

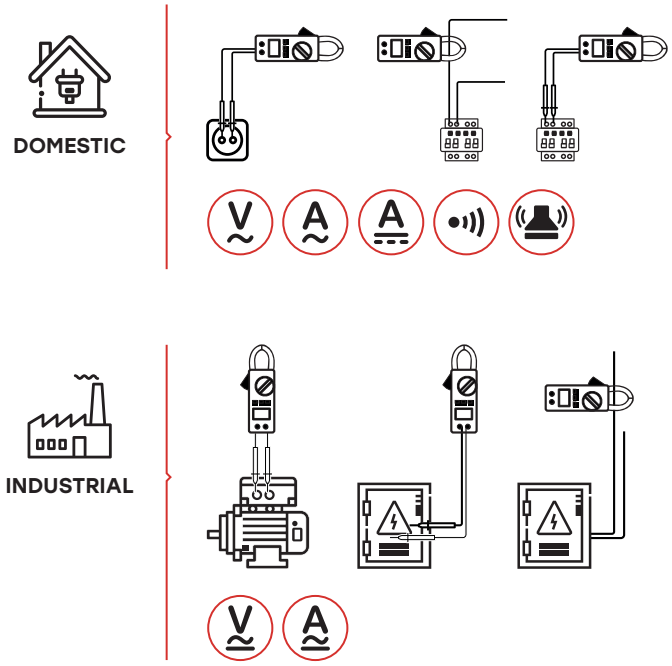

CONTENTS

222×86×32mm
8.74"×3.38"×1.26"
323g/0.71lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS



DIGITAL AC/DC CLAMP METER (T-RMS)

MS2138R

SKU NO.: MS2138RCBGLO
UPC CODE: 810053672143
EAN CODE: 8435394777863


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Diode Open Voltage 2.8V.
- Relative Measurement.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **1000A**
DC Current **1000A**	Resistance **40MΩ**	Capacitance **4000μF**
Frequency **10kHz**	Continuity test **<50±20Ω**	Display Counts **4000**
Jaw Opening **40mm/1.6"**		

MAIN APPLICATIONS

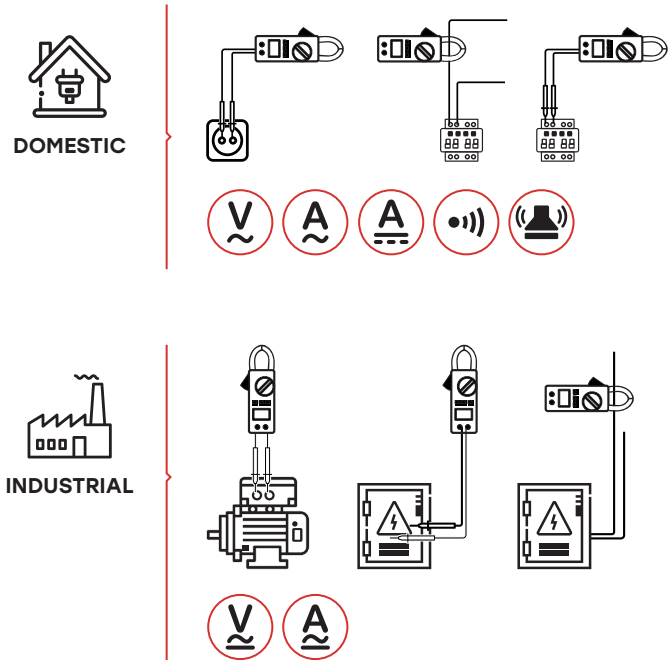

CONTENTS

222×86×32mm
8.74"×3.38"×1.26"
323g/0.71lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS



DIGITAL AC/DC CLAMP METER

MS2160

SKU NO.: MS2160CBGLO
UPC CODE: 810053674185
EAN CODE: 8435394779256

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Diode Open Voltage 3.2V.

SPECIFICATIONS


AC Voltage **600V**	DC Voltage **600V**	AC Current **80A**
DC Current **80A**	Resistance **40MΩ**	Capacitance **40mF**
Frequency **10kHz**	Display Counts **4000**	Continuity **<50Ω**
Jaw Opening **24mm/0.9"**	Temperature **-20°C~100°C/-4°F~1832°F**	

MAIN APPLICATIONS

DOMESTIC

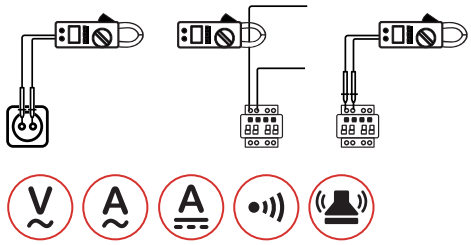

INDUSTRIAL

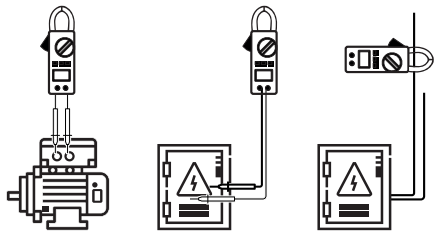

CONTENTS

195×80×45mm
7.8"×3.1"×1.8"
195g/0.43lb

3×1.5V AAA Batteries

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



HIGH SENSITIVITY AC LEAKAGE CLAMP METER

MS2006B

SKU NO.: MS2006BCBGLO
UPC CODE: 810053672532
EAN CODE: 8435394778174


FEATURE

- Auto Power Off.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

AC Current	Display Counts	Jaw Opening
60A	2000	31mm/1.2"

MAIN APPLICATIONS

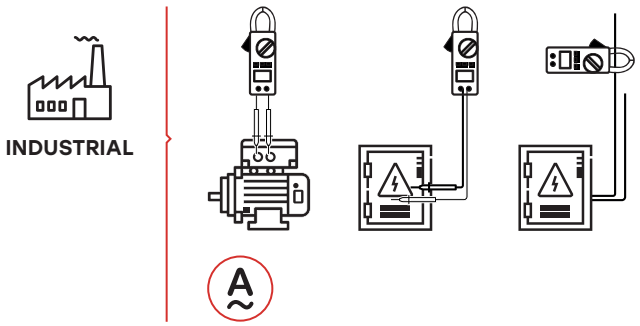

CONTENTS

176×59×28mm
6.9"×2.3"×1.1"
150g/0.33lb

2×1.5V AAA Batteries

ACCESSORIES
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L75×W45×H190mm

Carton Box
45×33×29.5cm

X 50PCS



AC LEAKAGE CLAMP METER

MS2016A

SKU NO.: MS2016ACBGLO
UPC CODE: 810053675052
EAN CODE: 8435394783062

FEATURE


- Auto Ranging.
- Auto Power Off.
- True RMS For AC Voltage.
- Low Pass Filter Function (50/60Hz).

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **150A**
Resistance **40MΩ**	Capacitance **40mF**	Jaw Opening **30mm/1.2"**
Display Counts **4000**	Temperature **-20°C~1000°C/-4°F~1832°F**	

MAIN APPLICATIONS

INDUSTRIAL

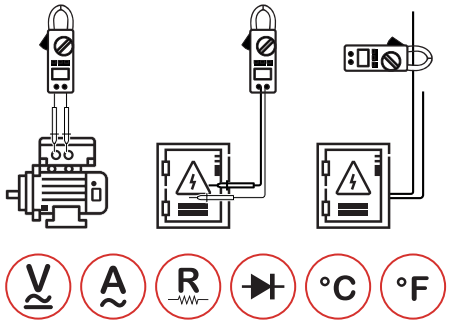

CONTENTS

213×62×38mm
8.39"×2.44"×1.5"
238g/0.52lb

2×1.5V AAA Batteries

ACCESSORIES
Test Leads
K-type thermocouple
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L105×W55×H235mm

Carton Box
50×30.5×23cm

X 20PCS



THREE PHASE DIGITAL POWER CLAMP METER

MS2203

SKU NO.: MS2203CBGLO
UPC CODE: 810053672570
EAN CODE: 8435394778211

FEATURE


- Auto & Manual Ranging.
- Data Logging 28 groups.
- True Root Mean Square.
- Bar Graph.

SPECIFICATIONS

AC Voltage **600V**	AC Current **1000A**	Frequency **1000Hz**
Active Power **600kW**	Apparent Power **600kVA**	Reactive Power **600kVAr**
Jaw Opening **50mm/2.0"**	Display Counts **9999**	

MAIN APPLICATIONS

INDUSTRIAL

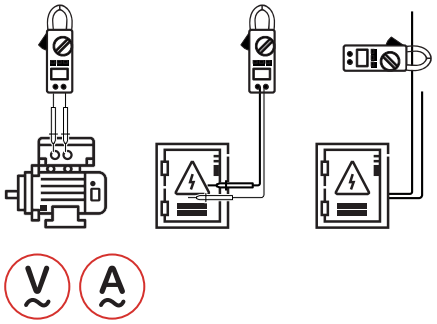

CONTENTS

300×103×51mm
11.8"×4.1"×2.0"
640g/1.4lb

4×1.5V AAA Batteries

ACCESSORIES
Test Leads
Alligator clip
RS232C interface cable
PC data record graph software
Carry Case
Battery

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L370×W140×H324mm

Carton Box
58×39×35cm

X 4PCS



THREE PHASE DIGITAL POWER CLAMP METER

MS2205

SKU NO.: MS2205CBAGLO
UPC CODE: 810053674192
EAN CODE: 8435394779263


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Data Hold.
- True Root Mean Square.

SPECIFICATIONS

AC Voltage 600V	AC Current 1000A	Frequency 1000Hz
Active Power 600kW	Apparent Power 600kVA	Reactive Power 600kVAr
Jaw Opening 50mm/2.0"	Display Counts 6000	

MAIN APPLICATIONS

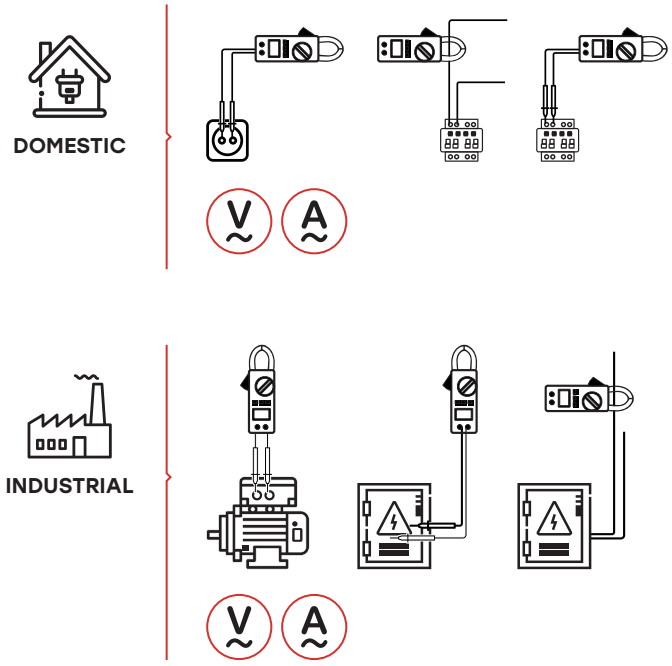

CONTENTS

300×103×51mm
11.8"×4.1"×2.0"
640g/1.4lb

4×1.5V AAA Batteries

ACCESSORIES
Test Leads
Alligator clip
RS232C interface cable
PC data record graph software
Carry Case
Battery

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L370×W140×H324mm

Carton Box
58×39×35cm

X 4PCS



CAT III 1000V
CAT IV 600V

SINGLE PHASE POWER CLAMP METER

MS2225A

SKU NO.: MS2225ACBGLO
UPC CODE: 810053674680
EAN CODE: 8435394779744


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- True Root Mean Square.
- Diode Open voltage 3.2V.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
Resistance **60MΩ**	Capacitance **1000mF**	Continuity **<50Ω**
Frequency **10kHz**	Display Counts **6000**	Jaw Opening **40mm/1.6"**

MAIN APPLICATIONS

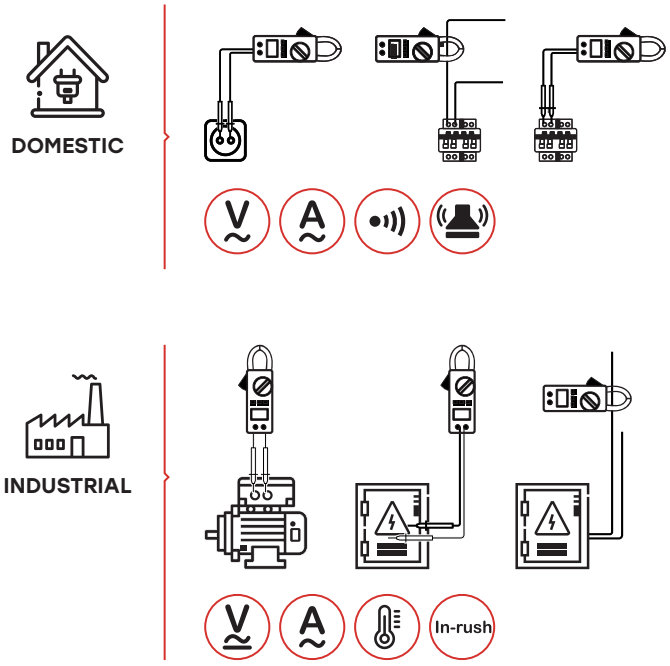

CONTENTS

250×98×53mm
9.84"×3.78"×2.09"
450g/0.99lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Alligator clip (option)

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS



AC/DC CLAMP METER

M9912

SKU NO.: M9912CBAGLO
UPC CODE: 810053674079
EAN CODE: 8435394779140

FEATURE


- Diode and Continuity.
- Display Backlight.
- Data Hold.

SPECIFICATIONS


AC Voltage 750V	DC Voltage 750V	AC Current 1000A
DC Current 1000A	Resistance 30MΩ	Frequency 30kHz
Display Counts 3200	Jaw Opening 55mm/2.2"	

MAIN APPLICATIONS

DOMESTIC

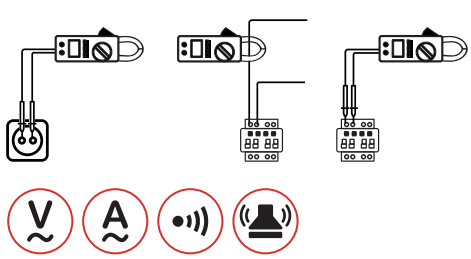

INDUSTRIAL

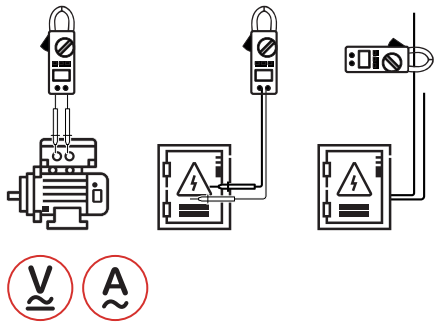

CONTENTS

282×104×47mm
11.1"×4.09"×1.85"
500g/0.83lb

1×9V 6F22 Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L300×W65×H250mm

Carton Box
61.5×37×27cm

X 10PCS



CAT II 1000V

DIGITAL CLAMP METER

MS2015A

SKU NO.: MS2015ACBGLO
UPC CODE: 810053673256
EAN CODE: 8435394778983


FEATURE

- Display 6000 Counts.
- Auto & Manual Ranging.
- Non-Contact Voltage Detector.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
Resistance **60MΩ**	Capacitance **100mF**	Frequency(A) **10MHz**
Display Counts **6000**	Jaw Opening **40mm/1.6"**	

MAIN APPLICATIONS

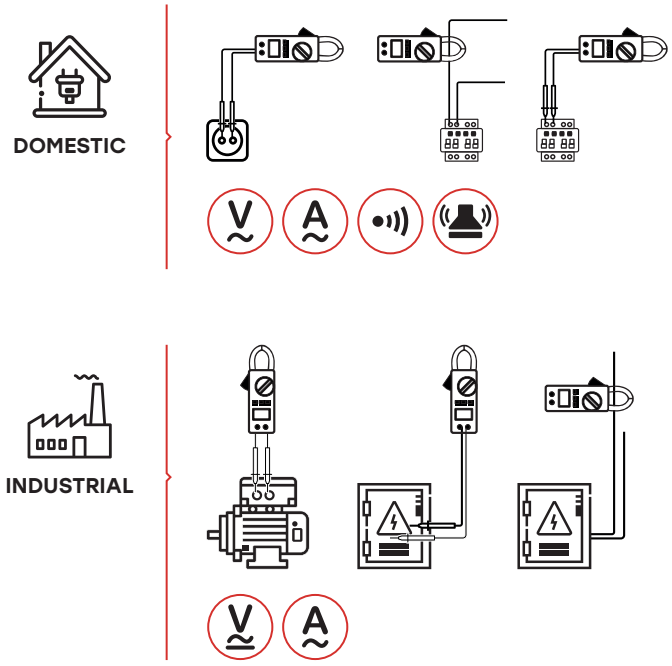

CONTENTS

82×42×32mm
3.2"×1.65"×1.26"
45g/0.1lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS




CE

RoHS

CAT III 600V

MAIN APPLICATIONS

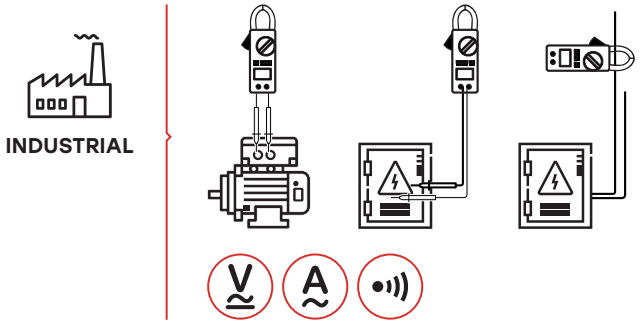

CONTENTS



192×68×43mm
7.56"×2.67"×1.7"
230g/0.5lb



1×9V 6F22
Battery



Test Leads
Carry bag
Battery



Calibration
Certificate



Quick Start
Guide

PACKAGING INFORMATION



Color Box
L172×W80×H255mm



Carton Box
53×44.5×37cm



X 20PCS

DIGITAL AC CLAMP METER

MS2600

SKU NO.: MS2600CBGLO
UPC CODE: 810053676806
EAN CODE: 8435394785332

FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Relative Measurement.
- Diode Open Voltage 1.5V.

SPECIFICATIONS

AC Voltage **700V**	DC Voltage **1000V**	AC Current **200A**
Resistance **40MΩ**	Capacitance **40μF**	Frequency(Hz/Duty) **4kHz/100kHz**
Display Counts **4000**	Jaw Opening **12mm/0.5"**	Continuity **<50±20Ω**



DIGITAL AC CLAMP METER

MS2601

SKU NO.: MS2601CBGLO
UPC CODE: 810053674215
EAN CODE: 8435394779287


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Non-Contact Voltage Detector.
- Diode Open Voltage 3.2V.

SPECIFICATIONS

AC Voltage **600V**	DC Voltage **600V**	AC Current **200A**
Resistance **60MΩ**	Capacitance **60mF**	Frequency(A/V) **60Hz/60MHz**
Display counts **6000**	Jaw opening **12mm/0.5"**	Continuity **<50Ω**
Temperature **-20°C~400°C/-4°F~752°F**		

MAIN APPLICATIONS

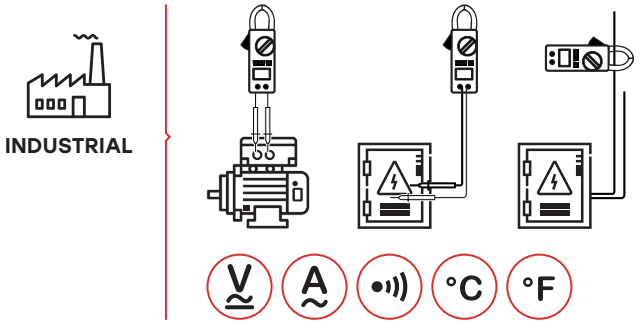

CONTENTS

201×65×43mm
7.7"×2.6"×1.7"
265g/0.58lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
K type thermocouple
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L172×W80×H255mm

Carton Box
53×44.5×37cm

X 20PCS



DIGITAL CLAMP TRANSDUCER

MS3300

SKU NO.: MS3300CBGLO
UPC CODE: 810053675090
EAN CODE: 8435394783086

FEATURE


- True Root Mean Square.
- DCA Zero Adjust.

SPECIFICATIONS

AC Current **1000A**	DC Current **1000A**	AC Output **1mV/A**
DC Output **1mV/A**	Jaw opening **55mm/2.2"**	

MAIN APPLICATIONS

INDUSTRIAL

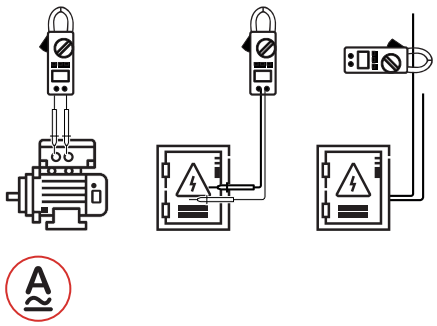

CONTENTS

256×104×47mm
9.3"×3.86"×1.9"
520g/1.1lb

1×9V 6F22
Battery

ACCESSORIES
Wrapping Case

Calibration
Certificate

Quick Start
Guide

PACKAGING INFORMATION

Color Box
L300×W65×H250mm

Carton Box
61.5×37×27cm

X 10PCS



CAT II 600V

DIGITAL CLAMP TRANSDUCER

MS3302

SKU NO.: MS3302CBGLO
UPC CODE: 810053674697
EAN CODE: 8435394784311

FEATURE


- Jaw Opening Φ28mm/1.1".

SPECIFICATIONS

AC Current	Output
400A	1mV/A

MAIN APPLICATIONS

INDUSTRIAL

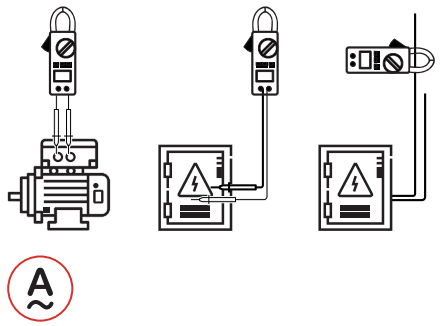

CONTENTS

143×64×30mm
5.6"×2.5"×1.2"
185g/0.4lb

Calibration Certificate

ACCESSORIES
Wrapping Case

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L115×W55×H165mm

Carton Box
47.5×34.5×32cm

X 40PCS

AC LINE SPLITTERS

USA TYPE | EU TYPE | UK TYPE





AC LINE SPLITTER

MS922A

SKU NO.: MS922ACBGLO
UPC CODE: 810053675380
EAN CODE: 8435394783420


FEATURE

- Allows for Easy AC Current Measurements Using a Clamp Meter on 2 or 3 Wire Power Cords.
- Voltage Check Sockets for Easy Power Calculations.

SPECIFICATIONS

AC Voltage	AC Current
125V	15A

MAIN APPLICATIONS

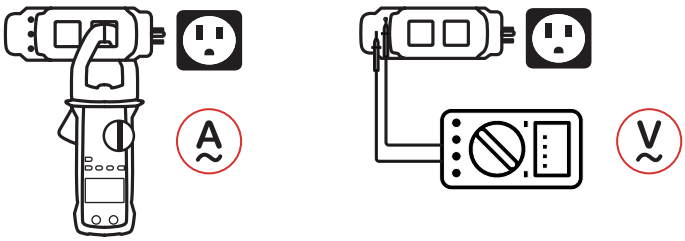

CONTENTS

171×57×48mm
6.7''×2.2''×1.9"
131g/0.29lb

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L85×W65×H230mm

Carton Box
48×34.5×36.5cm

X 40PCS



CAT II 600V

AC LINE SPLITTER

MS922D

SKU NO.: MS922DCBGLO
UPC CODE: 810053675397
EAN CODE: 8435394783437


FEATURE

- Allows for Easy AC Current Measurements Using a Clamp Meter on 2 or 3 Wire Power Cords.
- Voltage Check Sockets for Easy Power Calculations.

SPECIFICATIONS

AC Voltage	AC Current
250V	15A

MAIN APPLICATIONS

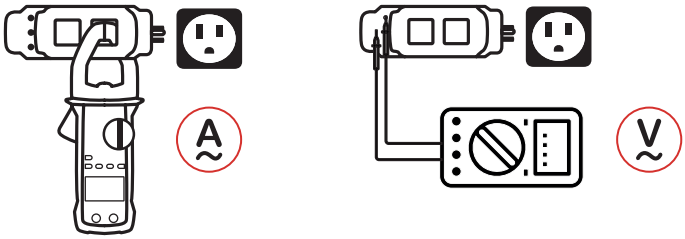

CONTENTS

200×57×48mm
7.8''×2.2''×2.9"
140g/0.3lb

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L85×W65×H230mm

Carton Box
48×34.5×36.5cm

X 40PCS



AC LINE SPLITTER

MS922E

SKU NO.: MS922ECBGLO
UPC CODE: 810053675403
EAN CODE: 8435394783444


FEATURE

- Allows for Easy AC Current Measurements Using a Clamp Meter on 2 or 3 Wire Power Cords.
- Voltage Check Sockets for Easy Power Calculations.

SPECIFICATIONS

AC Voltage	AC Current
250V	15A

MAIN APPLICATIONS

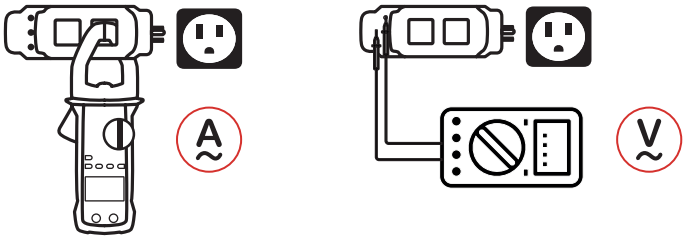

CONTENTS

173×57×48mm
6.8''×2.2''×1.9"
131g/0.29lb

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L85×W65×H230mm

Carton Box
48×34.5×36.5cm

X 40PCS

ELECTRICAL TESTERS

NON CONTACT VOLTAGE TESTER
TWO POLE VOLTAGE TESTER





NCV WITH INFRARED THERMOMETER

MS6580B

SKU NO.: MS6580BCBGLO
UPC CODE: 810053675250
EAN CODE: 8435394783260

FEATURE

- Non-Contact Voltage Detector.
- NCV Sensitivity 4 Levels.
- Infrared Temperature.
- Spectral Response 8-14 μm.

SPECIFICATIONS

AC Voltage **1000V**	Temperature **-20°C~330°C/-46°F~626°F**
Repeatability **±0.1°C**	Emissivity **0.95**

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

CONTENTS

- 152×31×31mm 6"×1.22"×1.22" 220g/0.44lb
- 2×1.5V AAA Batteries
- Battery (ACCESSORIES)
- Calibration Certificate
- Quick Start Guide (QSG)

PACKAGING INFORMATION

Color Box
L82×W40×H184mm

Carton Box
39×22×35.5cm

X 40PCS



NON CONTACT AC VOLTAGE DETECTOR

MS8900

SKU NO.: MS8900CBGLO
UPC CODE: 810053672723
EAN CODE: 8435394778365

FEATURE

- Sound and Light Instruction.
- Double Molded Case.
- Operating Temperature 0°C~50°C.

SPECIFICATIONS

AC Voltage	Frequency	Humidity
100~240V	50Hz~60Hz	85%RH

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

CONTENTS

157×24×20mm
6.18"×0.94"×0.78"
42g/0.09lb

2×1.5V AAA Batteries

Battery

ACCESSORIES

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L82×W40×H184mm

Carton Box
39×22×35.5cm

X 40PCS



NON CONTACT AC VOLTAGE DETECTOR

MS8900A

SKU NO.: MS8900ACBGLO
UPC CODE: 810053673041
EAN CODE: 8435394778778

FEATURE

- Sound and Light Instruction.
- Double Molded Case.
- Operating Temperature 0°C~50°C.

SPECIFICATIONS

AC Voltage	Frequency	Humidity
90~1000V	50Hz~60Hz	85%RH

Altitude
<2000m

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

CONTENTS

157×24×20mm
6.18"×0.94"×0.78"
42g/0.09lb

2×1.5V AAA Batteries

Battery

ACCESSORIES

Calibration Certificate

Quick Start Guide

QSG

PACKAGING INFORMATION

Color Box
L82×W40×H184mm

Carton Box
39×22×35.5cm

X 40PCS



NON CONTACT AC VOLTAGE DETECTOR

MS8900C

SKU NO.: MS8900CCBGLO
UPC CODE: 810053675373
EAN CODE: 8435394783413

FEATURE

- Sound and Light Instruction.
- Double Molded Case.
- Operating Temperature 0°C~50°C.

SPECIFICATIONS

AC Voltage	Frequency	Humidity
100~240V	50Hz~60Hz	85%RH

Altitude
<2000m

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

CONTENTS

157×24×20mm
6.18"×0.94"×0.78"
42g/0.09lb

2×1.5V AAA Batteries

ACCESSORIES
Battery

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L82×W40×H184mm

Carton Box
39×22×35.5cm

X 40PCS



NON CONTACT AC VOLTAGE DETECTOR

MS8902A

SKU NO.: MS8902ACBGLO
UPC CODE: 810053672730
EAN CODE: 8435394778372

FEATURE


- Sound and Light Instruction.
- Double Molded Case.
- Operating Temperature 0°C~50°C.

SPECIFICATIONS

AC Voltage	Frequency	Humidity
12~1000V	50Hz~500Hz	85%RH

Altitude
<2000m

MAIN APPLICATIONS

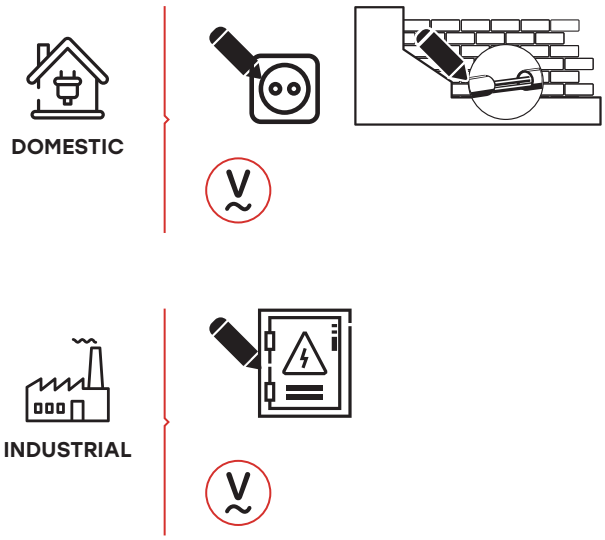

CONTENTS

157×24×20mm
6.18"×0.94"×0.78"
42g/0.09lb

2×1.5V AAA Batteries

Battery

ACCESSORIES

Calibration Certificate

QSG

Quick Start Guide

PACKAGING INFORMATION

Color Box
L82×W40×H184mm

Carton Box
39×22×35.5cm

X 40PCS



NON CONTACT AC VOLTAGE DETECTOR

MS8902B

SKU NO.: MS8902BCBGLO
UPC CODE: 810053674505
EAN CODE: 8435394779577

FEATURE

- Sound and Light Instruction.
- Double Molded Case.
- Operating Temperature 0°C~50°C.

SPECIFICATIONS

AC Voltage	Frequency	Humidity
20~1000V	50Hz~500Hz	85%RH

Altitude
<2000m

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

CONTENTS

157×24×20mm
6.18"×0.94"×0.78"
42g/0.09lb

1×12V A23S Battery

ACCESSORIES
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L82×W40×H184mm

Carton Box
39×22×35.5cm

X 40PCS



CAT II 1000V
CAT III 600V

NON CONTACT AC VOLTAGE DETECTOR

MS8907

SKU NO.: MS8907CBGLO
UPC CODE: 810053674789
EAN CODE: 8435394779843

FEATURE

- Sound and Light Instruction.
- Work Light.
- Operating Temperature -10°C~50°C.

SPECIFICATIONS

AC Voltage	Frequency	Humidity
50~1000V	50Hz/60Hz	85%RH

Altitude
<2000m

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

CONTENTS

157×24×20mm
6.2"×0.95"×0.79"
42g/0.09lb

2×1.5V AAA Batteries

ACCESSORIES
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L82×W40×H184mm

Carton Box
39×22×35.5cm

X 40PCS



VOLTAGE TESTER

MS8922A

SKU NO.: MS8922ACBGLO
UPC CODE: 810053674529
EAN CODE: 8435394779591

FEATURE

- Ergonomic Design That Facilitates Its Use.
- Operation Time Maximum 30s.
- Recovery Time 10 Minutes.


SPECIFICATIONS

AC Voltage	DC Voltage	Frequency
400V	400V	50Hz/60Hz

Altitude
<2000m

MAIN APPLICATIONS

DOMESTIC

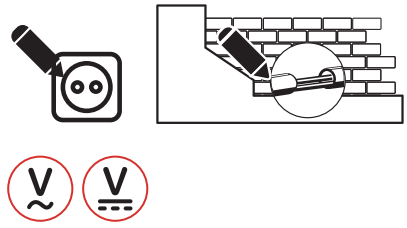

INDUSTRIAL



CONTENTS

223×40×32mm
8.78"×1.57"×1.26"
98.5g/0.26lb

Calibration Certificate

QSG Quick Start Guide

PACKAGING INFORMATION

Color Box
L125×W40×H255mm

Carton Box
53×25×27cm

X 20PCS



CAT III 400V

MAIN APPLICATIONS

DOMESTIC

INDUSTRIAL

CONTENTS

223×40×32mm
8.78"×1.57"×1.26"
98.5g/0.26lb

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L125×W40×H255mm

Carton Box
53×25×27cm

X 20PCS

VOLTAGE TESTER WITH RCD

MS8922B

SKU NO.: MS8922BCBGLO
UPC CODE: 810053674536
EAN CODE: 8435394779607

FEATURE

- RCD Test Function.
- Operation Time Maximum 30s.
- Recovery Time 10 Minutes.
- Operation Temperature -10~55°C/14~131°F.

SPECIFICATIONS

AC Voltage	DC Voltage	Frequency
400V	400V	50Hz/60Hz

Altitude
<2000m

CIRCUIT TESTERS

WIRE TESTERS AND TRACKER | SOCKET TESTER
CIRCUIT BREAKER FINDER





3 WIRE / GFCI OUTLET TESTER

MS102

SKU NO.: MS102CBGLO
UPC CODE: 810053675038
EAN CODE: 8435394783031

FEATURE

- Quick and Easy Tool to Use to Make Sure That An Outlet or GFCI Is Safe for Use.

SPECIFICATIONS

AC Voltage	Temperature	Humidity
125V	0~40°C	<80% RH

MAIN APPLICATIONS

DOMESTIC

CONTENTS

82×42×32mm
3.2"×1.65"×1.26"
45g/0.1lb

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L88×W65×H100mm

Carton Box
34.5×22×38cm

X 40PCS



3 WIRE OUTLET TESTER

MS112

SKU NO.: MS112CBGLO
UPC CODE: 810053675045
EAN CODE: 8435394783048

FEATURE

- Quick and Easy Tool to Use to Make Sure That An Outlet or GFCI Is Safe for Use.

SPECIFICATIONS

AC Voltage	Temperature	Humidity
125V	0~40°C	<80% RH

MAIN APPLICATIONS

DOMESTIC

CONTENTS

82×42×32mm
3.2"×1.65"×1.26"
45g/0.1lb

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L88×W65×H100mm

Carton Box
34.5×22×38cm

X 40PCS





MS5902RTD



MS5902RTE





MS5902RTF

CIRCUIT BREAKER FINDER

MS5902RT

SKU NO.	MS5902RTDCBGLO	MS5902RTECBGLO	MS5902RTFCBGLO
UPC CODE	810053672877	810053675106	810053674727
EAN CODE	8435394778556	8435394783093	8435394779782

FEATURE

- Socket Tester and Circuit Breaker Finder.
- Sound and Light Signals.
- Professional Reference.


SPECIFICATIONS


AC Voltage(TD)	AC Voltage(TE)	AC Voltage(TF)
230V	230V	120V

MAIN APPLICATIONS



DOMESTIC





CONTENTS



MS5902R:
198×40×50mm
7.8"×1.57"×1.97"
126g/0.28lb

MS5902TD/TE:
71×64×55mm
2.8"×2.5"×2.16"
60g/0.13lb

MS5902TF:
82×42×32mm
3.2"×1.65"×1.26"
35g/0.1lb

ACCESSORIES

Carry bag
Battery

1×9V 6F22
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5cm

X 20PCS





MS5905RTD



MS5905RTE

CE

Intertek

RoHS

CAT II 600V

CIRCUIT BREAKER FINDER with NCV

MS5905RT

SKU NO.	MS5905RTDCBGLO	MS5905RTECBGLO
UPC CODE	810053675120	810053673126
EAN CODE	8435394783116	8435394778853

FEATURE


- Socket Tester and Circuit Breaker Finder.
- Sound and Light Signals.
- Professional Reference.


SPECIFICATIONS

AC Voltage(TD)	AC Voltage(TE)
230V	230V

MAIN APPLICATIONS

DOMESTIC





CONTENTS



MS5905R:
177×46×31mm
6.97"×1.81"×1.22"
130g/0.29lb

MS5905TD/TE:
71×64×55mm
2.8"×2.5"×2.16"
63g/0.14lb

ACCESSORIES

Carry bag
Battery

1×9V 6F22
Battery

Calibration
Certificate

QSG

Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS









MS6860D MS6860E

SOCKET TESTER

MS6860

SKU NO.	MS6860DCBGLO	MS6860ECBGLO
UPC CODE	810053674369	810053675281
EAN CODE	8435394779430	8435394783307

FEATURE

- Reliable and Easy to Use Modern, Ergonomic Design with Unique Soft Finger Grip Compact, Durable-Designed to Safety Standard EN61010.

SPECIFICATIONS

AC Voltage(MS6860D)	AC Voltage(MS6860E)
230V	230V

MAIN APPLICATIONS

DOMESTIC

CONTENTS

68×60×56mm
2.67"×2.36"×2.2"
60g/0.13lb

Calibration Certificate

Quick Start Guide

PACKAGING INFORMATION

Color Box
L88×W65×H100mm

Carton Box
34.5×22×38cm

X 40PCS

CIRCUIT ANALYZERS

MOTOR & PHASE ROTATION INDICATOR
CIRCUIT ANALYZER





MOTOR & PHASE ROTATION INDICATOR

MS5900

SKU NO.: MS5900CBGLO
UPC CODE: 810053672006
EAN CODE: 8435394777733

FEATURE


- Motor & phase rotation tester.
- Led light signals.
- Operating Altitude 2000m.
- Pollution Degree 2.

SPECIFICATIONS

AC Voltage()	Frequency
120~400V	2~400Hz

MAIN APPLICATIONS

DOMESTIC

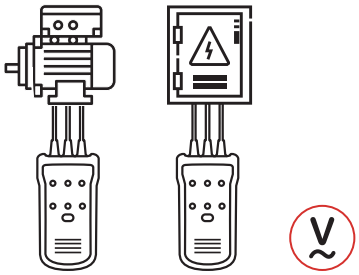

CONTENTS

130×72×32mm
5.1"×2.8"×1.3"
193g/0.43lb

1×9V 6F22
Battery

ACCESSORIES
Test alligator clips
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L168×W64×H238mm

Carton Box
49.5×37×35.5cm

X 20PCS



CAT III 600V

MOTOR & PHASE ROTATION INDICATOR

MS5901

SKU NO.: MS5901CBGLO
UPC CODE: 810053672921
EAN CODE: 8435394778655

FEATURE


- Motor & phase rotation tester.
- Led light signals.
- Operating Altitude 2000m.
- Pollution Degree 2.

SPECIFICATIONS

AC Voltage	Frequency
120~400V	2~400Hz

MAIN APPLICATIONS

DOMESTIC

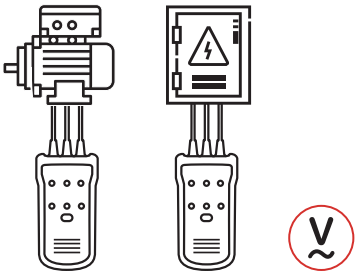

CONTENTS

130×72×32mm
5.1"×2.8"×1.3"
193g/0.43lb

1×9V 6F22
Battery

ACCESSORIES
Test alligator clips
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L168×W64×H238mm

Carton Box
51×36×36cm

X 20PCS



CAT III 300V

CIRCUIT ANALYZER

MS5908A

SKU NO.: MS5908ACBGLO
UPC CODE: 810053673119
EAN CODE: 8435394778846

FEATURE


- Auto Power Off.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

Line Voltage 85~135V	Peak Line Voltage 120~190V	Frequency 45~65Hz
Voltage Drop Load Current 12/15/20A		RCD Trip Time 1ms~6.5S
RCD Trip Current 30mA~37mA	GFCI Trip Time 1ms~6.5S	GFCI Trip Current 6mA~9mA

MAIN APPLICATIONS

DOMESTIC



CONTENTS

194×78×37mm
7.64"×3.07"×1.46"
254g/0.56lb

6×1.5V AAA Batteries

ACCESSORIES
Power Cord
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS



CAT III 300V

CIRCUIT ANALYZER

MS5908C

SKU NO.: MS5908CCBGLO
UPC CODE: 810053672808
EAN CODE: 8435394778440

FEATURE


- Auto Power Off.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

Line Voltage 85~265V	Peak Line Voltage 120~375V	Frequency 45~65Hz
Voltage Drop Load Current 5/8/10A		RCD Trip Time 1ms~6.5S
RCD Trip Current 30mA~37mA	GFCI Trip Time 1ms~6.5S	GFCI Trip Current 6mA~9mA

MAIN APPLICATIONS

DOMESTIC



CONTENTS

194×78×37mm
7.64"×3.07"×1.46"
254g/0.56lb

6×1.5V AAA Batteries

ACCESSORIES
Power Cord
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS

WIRE & CABLE TESTERS

NETWORK CABLE TESTER | CABLE TRACKER
MULTI-FUNCTIONS CABLE TRACKER | ADVANCED CABLE LOCATOR





NETWORK CABLE TESTER

MS6810

SKU NO.: MS6810CBGLO
UPC CODE: 810053674345
EAN CODE: 8435394779416


FEATURE

- Widely Used For Coaxial Cable (BNC), UTP And STP Cable. It Can Automatically Check For Open Circuits, Shorts, Miswired, And Reversals.

SPECIFICATIONS

Distance
200m(max)

MAIN APPLICATIONS

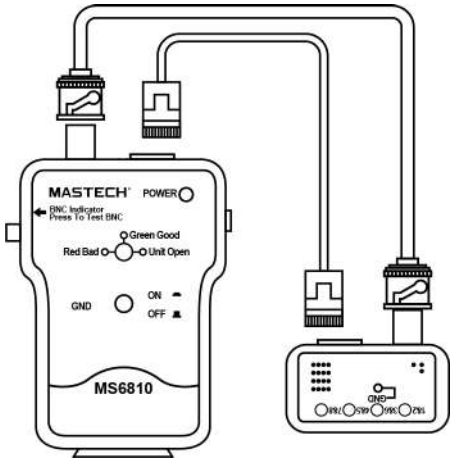

CONTENTS

153×74×31mm
6.0"×2.9"×1.2"
120g/0.26lb

1×9V 6F22
Battery

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L90×W40×H165mm

Carton Box
42.5×35×29cm

X 60PCS



NETWORK CABLE TESTER

MS6811

SKU NO.: MS6811CBGLO
UPC CODE: 810053672624
EAN CODE: 8435394778266

FEATURE

- Tests for Open Circuits, Shorts, Miswires, Reversals, and Split Pairs.
- DEBUG Quickly Identifies Which Cable Pairs Have A Specific Wiring Fault.

SPECIFICATIONS

Distance
200m(max)

MAIN APPLICATIONS

Faul t detail s

Fig.1 SPLIT PAIRS




Fig.2 SHORT




Fig.3 MISWIRE





Fig.4 REVERSED



CONTENTS

125×55×30mm
4.9"×2.2"×1.2"
106g/0.23lb

1×6V 4LR44/
4AG13 Battery

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L90×W40×H165mm

Carton Box
42.5×35×29cm

X 60PCS



CABLE TRACKER

MS6812A

SKU NO.: MS6812ACBGLO
UPC CODE: 810053675274
EAN CODE: 8435394783291


FEATURE

- Sound and Light Instruction.
- Cont and Tone LED Light.

SPECIFICATIONS

Send Tone Frequency	Receive Frequency
1.5kHz	100Hz~300kHz

MAIN APPLICATIONS

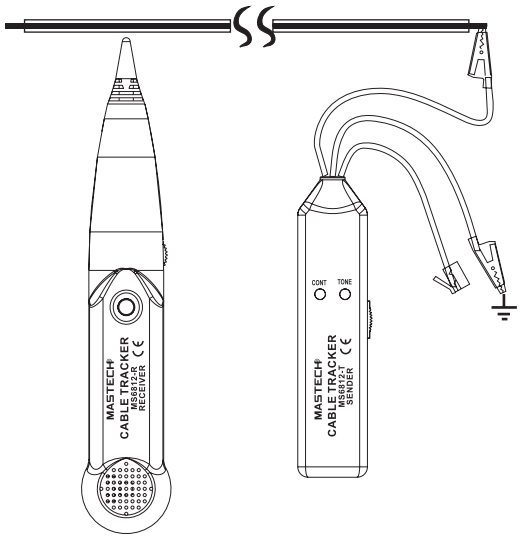

CONTENTS

- Receiver: 238×43×26mm 9.4"×1.7"×1.0" 71g/0.16lb
- Emitter: 145×35×25mm 5.7"×1.38"×0.98" 87g/0.2lb
- ACCESSORIES: Carry bag Battery
- 2x9V 6F22 Batteries
- Calibration Certificate
- QSG: Quick Start Guide

PACKAGING INFORMATION

Color Box
L125×W40×H255mm

Carton Box
53×22×27cm

X 20PCS



MULTI-FUNCTIONS CABLE TRACKER

MS6813

SKU NO.: MS6813CBGLO
UPC CODE: 810053672976
EAN CODE: 8435394778709

FEATURE

- Multifunction.
- Cable tester and tracker.
- State of the telephone lines.
- Small size ideal for transport.

SPECIFICATIONS

Receive Frequency	Send Tone Frequency
100Hz~300kHz	1.5kHz

MAIN APPLICATIONS

Fig.1 SHORT




Fig.2 MISWIRE



Fig.3 REVERSED



Fig.4 SPLIT PAIRS



CONTENTS



206×84×55mm
8.1"×3.3"×2.1"
330g/0.72lb



2×9V 6F22
Batteries



Carry bag
Battery



Calibration
Certificate



Quick Start
Guide

PACKAGING INFORMATION



Color Box
L172×W80×H255mm



Carton Box
46×27×37cm



X 10PCS



CE

Intertek

RoHS

CAT III 300V

ADVANCED WIRE TRACKER

MS6818

SKU NO.: MS6818CBGLO
UPC CODE: 810053672204
EAN CODE: 8435394777924

FEATURE


- Track Cables In The Wall or Earth.
- One or Dual-pole Application.
- Adjustable Sensitivity In Transmitter and Receiver.

SPECIFICATIONS

AC Voltage	DC Voltage	Output Signal
12~400V	12~400V	125kHz

Display Counts
2000

MAIN APPLICATIONS

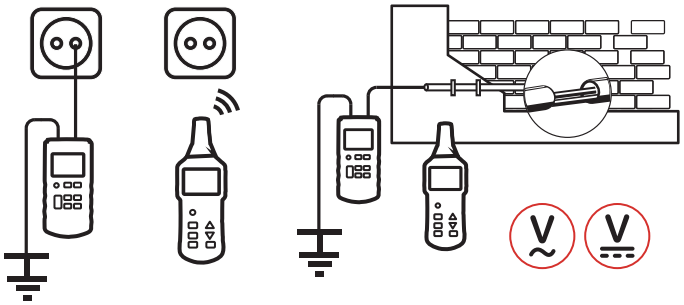

CONTENTS

Transmitter:
190×89×42.5mm
7.48"×3.5"×1.67"
420g/0.92lb

Receiver:
241.5×78×38.5mm
9.5"×3"×1.5"
350g/0.77lb

ACCESSORIES
Test leads
Test probe
Alligator clip
Grounding rod
Carry bag
Battery

1×9V 6F22 Battery/
6×1.5V AAA
Batteries

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L200xW85xH280mm

Carton Box
44.5x32.5x42cm

X 10PCS

LCR METERS

DIGITAL LCR METER | SMART SMD TESTER







DIGITAL LCR METER WITH USB INTERFACE

MS5308

SKU NO.: MS5308CBGLO
UPC CODE: 810053673102
EAN CODE: 8435394778839

FEATURE

- Auto & Manual Ranging.
- Auto Power off.
- LCR smart check and measurment.
- DCR mode.

SPECIFICATIONS

Resistance	Capacitance	LCR
200Ω	2000μF	2000H

MAIN APPLICATIONS

ELECTRONICS

CONTENTS

224×172×58mm
8.8"×6.8"×2.3"
841g/1.85lb

8×1.5 AA
Batteries

ACCESSORIES

Kelvin test clip
SMD test probe
IR data line
Software CD
Battery

External power supply
(option)

Calibration
Certificate

QSG

Quick Start
Guide

PACKAGING INFORMATION

Color Box
L320×W125×H255mm

Carton Box
52×33.5×29cm

X 4PCS



DIGITAL LCR METER

MS6013

SKU NO.: MS6013CBGLO
UPC CODE: 810053674222
EAN CODE: 8435394779294

FEATURE


- Zero Adjustment approx. ± 20pF.
- Input Jacks.
- High Accuracy in Measuring.
- Low Battery Display.

SPECIFICATIONS

Capacitance	Display Counts
200pF~20mF	2000

MAIN APPLICATIONS

ELECTRONICS



CONTENTS

189×91×31.5mm
7.4"×3.6"×1.2"
240g/0.52lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



SMART SMD TESTER (R/C)

MS8910

SKU NO.: MS8910CBGLO
UPC CODE: 810053672747
EAN CODE: 8435394778389

FEATURE

- Auto Ranging.
- Auto Power Off.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

Resistance	Capacitance	Display Counts
30MΩ	30mF	3000

Continuity
30Ω

MAIN APPLICATIONS

ELECTRONICS

CONTENTS

175×32×20mm
6.89"×1.26"×0.79"
48g/0.10lb

1×3V CR2032
Battery

ACCESSORIES
Spare test pin
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L57×W29×H203mm

Carton Box
44×32×31.5cm

X 100PCS



SMART SMD TESTER (R/C/L)

MS8911

SKU NO.: MS8911CBGLO
UPC CODE: 810053674512
EAN CODE: 8435394779584

FEATURE

- Auto Ranging.
- Auto Power Off.
- Data Hold.
- Low Battery Display.

SPECIFICATIONS

Resistance	Capacitance	Inductance
20MΩ	6mF	200H

Display Counts
6000

MAIN APPLICATIONS

ELECTRONICS

CONTENTS

186×35×23.6mm
7.3''×1.38''×0.93''
90g/0.2lb

1×3V CR2450
Battery

ACCESSORIES
Spare test pin
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L57×W29×H203mm

Carton Box
44×32×31.5cm

X 100PCS



DIGITAL LCR METER

MY6243

SKU NO.: MY6243CBGLO
UPC CODE: 810053672754
EAN CODE: 8435394778396

FEATURE


- Input Jacks.
- High Accuracy in Measuring.
- Low Battery Display.

SPECIFICATIONS

Capacitance	Inductance	Display Counts
200µF	2H	2000

MAIN APPLICATIONS

ELECTRONICS



CONTENTS

189×91×31.5mm
7.4"×3.6"×1.2"
240g/0.52lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS

EARTH RESISTANCE

EARTH RESISTANCE CLAMP METER | EARTH RESISTANCE TESTER
ADVANCED EARTH RESISTANCE TESTER







CAT III 1000V
CAT IV 600V

EARTH RESISTANCE CLAMP METER

MS2115A

SKU NO.: MS2115ACBGLO
UPC CODE: 810053672051
EAN CODE: 8435394777788


FEATURE

- Auto Power Off.
- Low Battery Display.
- MAX/MIN.

SPECIFICATIONS

AC Voltage **750V**	DC Voltage **1000V**	AC Current **1000A**
DC Current **1000A**	Resistance **60MΩ**	Capacitance **100mF**
Frequency **1000Hz**	Display Counts **6000**	Continuity **<50Ω**

MAIN APPLICATIONS

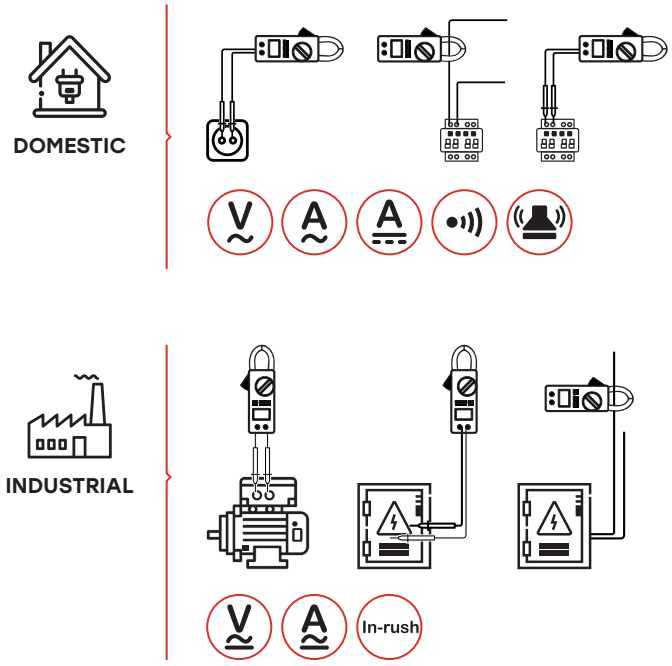

CONTENTS

238×92×50mm
9.3"×3.62"×1.96"
420g/0.7lb

1×9V 6F22
Battery

ACCESSORIES
Test Leads
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS



CAT III 150V

EARTH RESISTANCE CLAMP METER

MS2301

SKU NO.: MS2301CBGLO
UPC CODE: 810053674208
EAN CODE: 8435394779270


FEATURE

- Auto & Manual Ranging.
- Logging and Recall 99 Groups.
- Setting Alarm Threshold in 1~100Ω.

SPECIFICATIONS

Resistance **1200Ω**	AC Current **20A**	Display Counts **9999**
Jaw Opening **45mmx32mm/1.8"x1.3"**	Data Logging **99 groups**	

MAIN APPLICATIONS

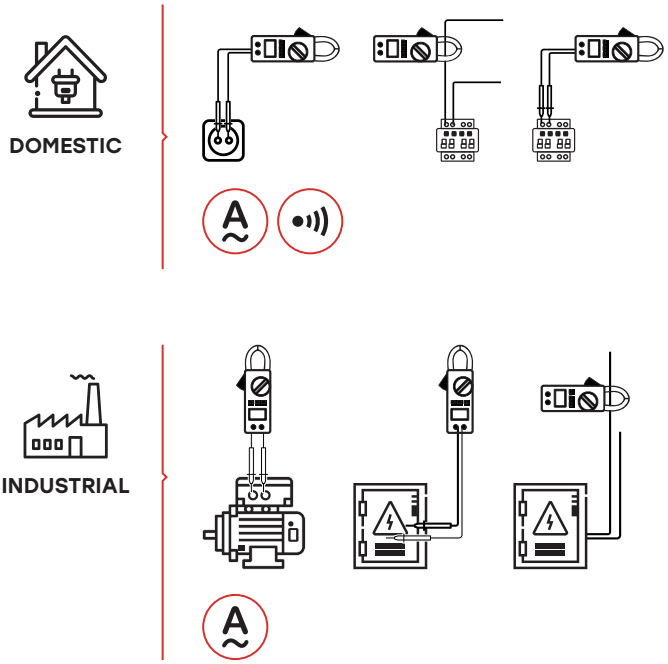

CONTENTS

276×104×54mm
10.8"×4.33"×2.1"
1050g/2.31lb

1×9V Alkaline Battery

ACCESSORIES
Calibration loop of resistance (1Ω/5Ω/10Ω)
Carry case
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L370×W140×H324mm

Carton Box
58×39×35cm

X 4PCS



CAT III 300V

EARTH RESISTANCE TESTER

MS2302

SKU NO.: MS2302CBGLO
UPC CODE: 810053672150
EAN CODE: 8435394777870


FEATURE

- Auto & Manual Ranging.
- Auto Power Off.
- Segments Bar Graph.
- MAX/MIN/AVG.

SPECIFICATIONS

Earth Voltage	Earth Resistance
AC 0~200V	0.01~4000Ω

MAIN APPLICATIONS

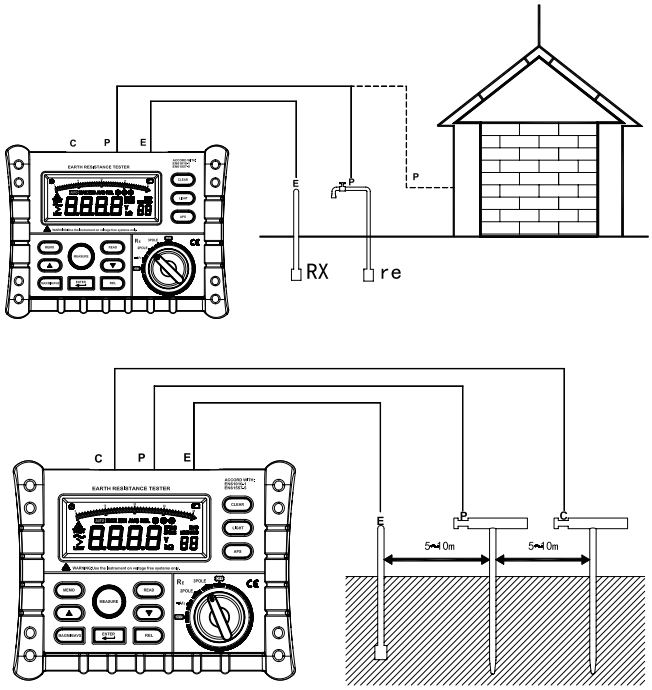

CONTENTS

330×265×125mm
13"×10.4"×4.9"
900g/1.98lb

6×1.5V AA Batteries

ACCESSORIES
Test leads (Red-15m/ Green-10m/Black-5m)
Wrapping bag
Auxiliary earth bar
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L325×W125×H255mm

Carton Box
52×33.5×29cm

X 4PCS



ADVANCED EARTH RESISTANCE TESTER

MS2306

SKU NO.: MS2306CTGLO
UPC CODE: 810053675069
EAN CODE: 8435394783079

FEATURE

- Auto Power Off.
- Alarming indicator for limit-value measurement.
- AVG.
- Compensation Resistance.

SPECIFICATIONS

3 Pole & 4 Pole Earthing-Resistance Test	**0.1Ω~20kΩ**
2 Pole R (AC)	**0.1Ω~20kΩ**
Soil Resistivity ρ	**0.02~1000**

MAIN APPLICATIONS


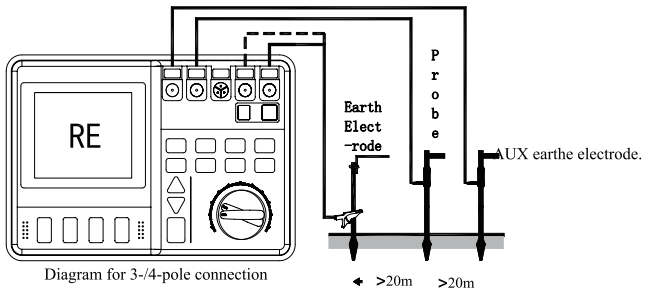


Diagram for 3-/4-pole connection

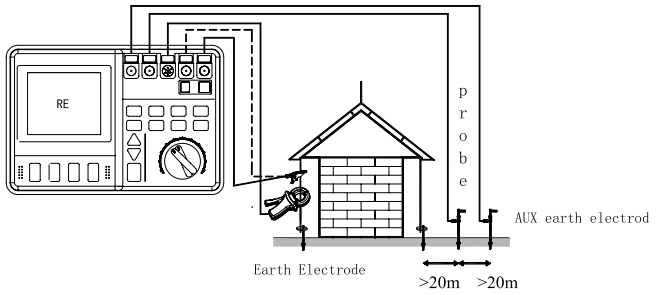

CONTENTS

284×230×125mm
11.2"×9.1"×4.9"
2.5kg/5.5lb

6×1.5V AA Batteries/ NI~MH Recharge Battery, 7.2V

ACCESSORIES

Test wire
Alligator clip
Auxiliary earth bar
Power cord
Carry bag
Battery

Rechargeable Ni-MH battery (optional)
Charger (optional)

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Carton Box
40×17.5×31.5cm

X 1PCS



ADVANCED EARTH RESISTANCE TESTER

MS2308

SKU NO.: MS2308CTGLO
UPC CODE: 810053676790
EAN CODE: 8435394785318

FEATURE

- Auto Power Off.
- Alarming indicator for limit-value measurement.
- AVG.
- Compensation Resistance.

SPECIFICATIONS

3 Pole & 4 Pole Earthing-Resistance Test		
0.02Ω~300kΩ		
2 Pole R (AC)	2 Pole R (DC)	Soil Resistivity ρ
0.02Ω~300kΩ	**0.02Ω~3kΩ**	**0.02~1000**

MAIN APPLICATIONS


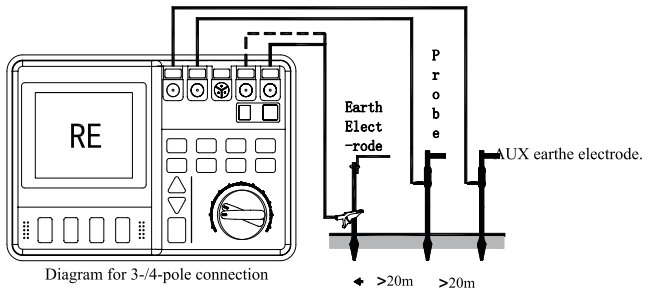


Diagram for 3-/4-pole connection

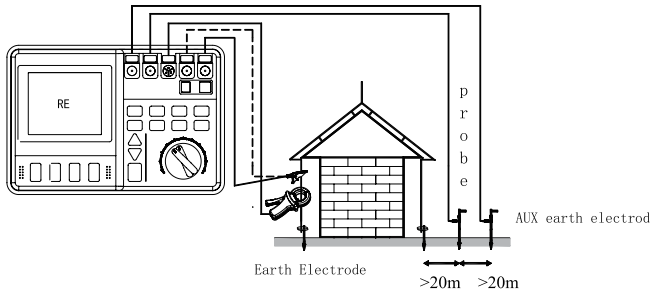

CONTENTS

284×230×125mm
11.2"×9.1"×4.9"
2.5kg/5.5lb

6×1.5V AA Batteries/ NI~MH Recharge Battery, 7.2V

ACCESSORIES

Test wire
Alligator clip
Auxiliary earth bar
Power cord
Current transformer φ51mm
Current clamp cable
Carry bag
Software CD
USB interface cable
Battery

Rechargeable Ni-MH battery (optional)
Charger (optional)

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Carton Box
40×17.5×31.5cm

X 1PCS

INSULATION TESTERS

DIGITAL INSULATION TESTER | HIGH VOLTAGE DIGITAL INSULATION TESTER | ADVANCED HIGH VOLTAGE INSULATION TESTER





DIGITAL INSULATION TESTER

MS5201

SKU NO.: MS5201CBGLO
UPC CODE: 810053672884
EAN CODE: 8435394778617


FEATURE

- Data Hold.
- Low Battery Display.
- Constant Measuring Lock.

SPECIFICATIONS

AC Voltage 700V	DC Voltage 1000V	Resistance 2000MΩ
Display Counts 2000	Continuity <50Ω	

MAIN APPLICATIONS

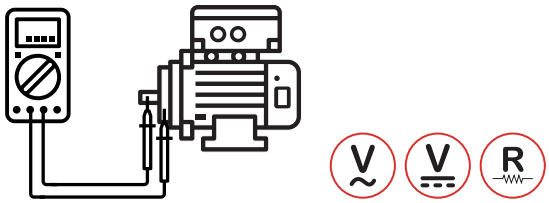

CONTENTS

192×122×55mm
7.48"×4.7"×2.2"
545g/1.3lb

6×1.5V AA Batteries

ACCESSORIES
Test Leads
Test Clips
Screwdriver
Soft Case
Carrying Case
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L370×W140×H324mm

Carton Box
58×39×35cm

X 4PCS



HIGH VOLTAGE INSULATION TESTER

MS5202

SKU NO.: MS5202CBGLO
UPC CODE: 810053673072
EAN CODE: 8435394778808


FEATURE

- Inner Battery Testing.
- Low Battery Display.
- Constant Measuring Lock.

SPECIFICATIONS

DC Output	Resistance
2500V	0~100GΩ

MAIN APPLICATIONS

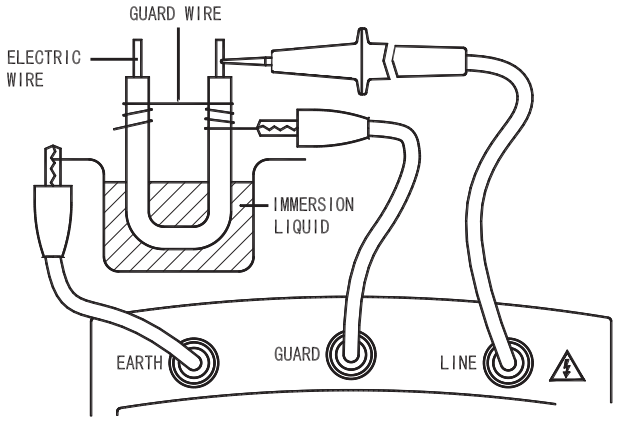

CONTENTS

225×138×81mm
8.86"×5.3"×3.19"
1200g/2.75lb

8×1.5V AA Batteries/
1×9V 6F22 Battery

ACCESSORIES
Test Clips
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L370×W140×H324mm


Carton Box
58×39×35cm

X 4PCS



CAT III 1000V
CAT IV 600V

MAIN APPLICATIONS

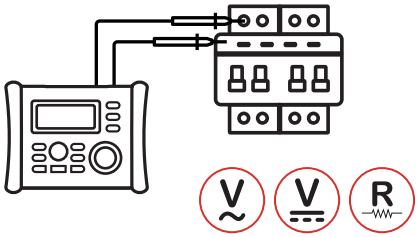

CONTENTS

200×155×76mm
7.6"×5.9"×2.95"
900g/1.98lb

6×1.5V AA
Batteries

ACCESSORIES
Test Leads
Alligator clip
Wrapping bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

DIGITAL INSULATION TESTER

MS5203

SKU NO.: MS5203CBGLO
UPC CODE: 810053672587
EAN CODE: 8435394784328

FEATURE

- Auto Power Off.
- MIN/MAX/AVG.
- Compare Function.
- Timer.

SPECIFICATIONS

AC Voltage	DC Voltage	DC Output
750V	1000V	1000V

Resistance
200Ω

PACKAGING INFORMATION

Color Box
L325×W125×H255mm

Carton Box
52×33.5×29cm

X 4PCS



CAT III 1000V
CAT IV 600V

DIGITAL INSULATION TESTER

MS5205

SKU NO.: MS5205CBGLO
UPC CODE: 810053672907
EAN CODE: 8435394778952

FEATURE


- Auto Power Off.
- Lock.
- MIN/MAX/AVG.
- Compare Function.

SPECIFICATIONS

AC Voltage	DC Voltage	DC Output
750V	1000V	2500V

Resistance
200Ω

MAIN APPLICATIONS

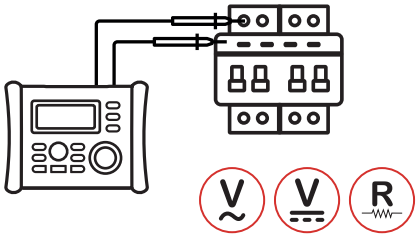

CONTENTS

180×140×65mm
7.1"×5.5"×2.56"
900g/1.98lb

8×1.5V AA
Batteries

ACCESSORIES
Test Leads
Alligator clip
Wrapping bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L325×W125×H255mm

Carton Box
52×33.5×29cm

X 4PCS



ADVANCED HIGH VOLTAGE INSULATION TESTER

MS5215

SKU NO.: MS5215CBGLO
UPC CODE: 810053672914
EAN CODE: 8435394778648

FEATURE


- Broad Range Of Testing Voltage.
- Insulation Diagnosis.
- Large Storage Memory.
- Clear Display.

SPECIFICATIONS

AC Voltage	DC Voltage	Resistance
50~750V	50~1000V	0.01MΩ~5TΩ

Temperature
-10°C~70°C

MAIN APPLICATIONS

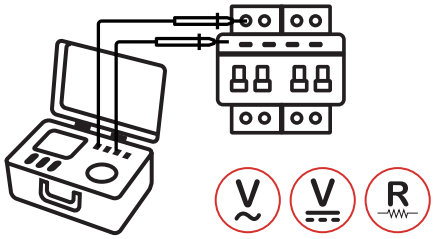

CONTENTS

284×230×125mm
11.2"×9.1"×4.9"
2426g/5.34lb

6×LR14 Batteries/
6×1.2V AA Batteries

Charger:
Input Voltage
100V~240V

ACCESSORIES

Tester probes leads 3m
(Red/Black/Blue)
Crocodile clips
(Red/Black/Blue)
Temperature Sensor
USB data line (1m)
Data analysis software CD
Instrument backpack
Battery

Rechargeable battery
pack(for charging
Ni-Hy battery)(optional)
AC charger (optional)

Calibration
Certificate

Quick Start
Guide

PACKAGING INFORMATION

Color Box
L400×W175×H315mm

Carton Box
42×37×34cm

X 2PCS

PAT TESTER

SAFETY PAT PLUS TESTER





SAFETY PAT PLUS TESTER

MS5911

SKU NO.: MS5911CBGLO
UPC CODE: 810053675137
EAN CODE: 8435394783123


FEATURE

- Safety CLASS I - Grounding/Insulation Resistance/Leakage Current
- Safety CLASS II - Insulation Resistance/Leakage Current

SPECIFICATIONS

DC Output	Resistance
250/500V	20MΩ

MAIN APPLICATIONS

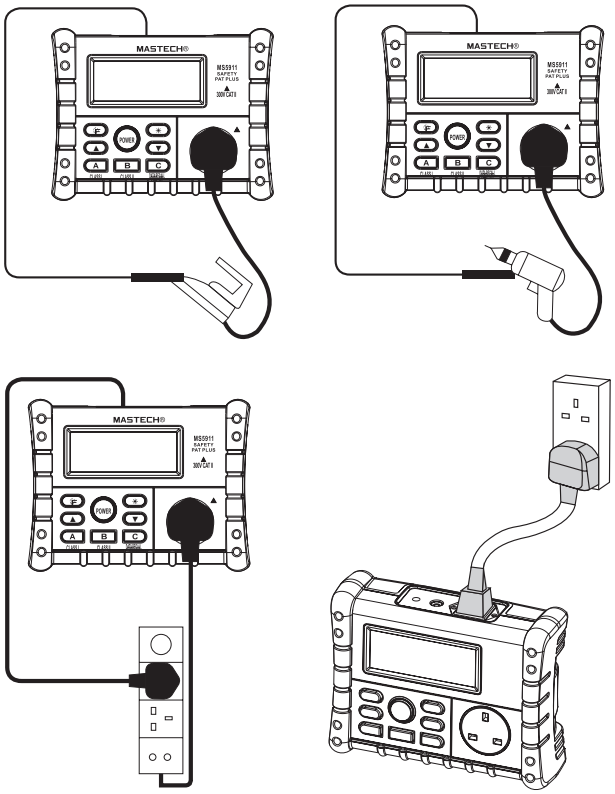

CONTENTS

204×155×76mm
7.8''×6.1''×3''
1270g/2.8lb

DV12V /
8×1.5V AA
Batteries

ACCESSORIES

Main test cord
Alligator clip test cord
Probe
Rugged padded carrying case
Battery

DC power adapter (optional)

Calibration Certificate

QSG

Quick Start Guide

PACKAGING INFORMATION

Color Box
L325×W125×H255mm

Carton Box
52×33.5×29cm

X 4PCS

THERMOMETERS

DIGITAL THERMOMETER | DIGITAL THERMO-HYGROMETER
NON-CONTACT INFRARED THERMOMETER





DIGITAL THERMOMETER

MS6500

SKU NO.: MS6500CBGLO
UPC CODE: 810053673089
EAN CODE: 8435394778815


FEATURE

- Sample Rate 500mS.
- Display 2000 counts.
- Data Hold.
- K-Type Thermocouple.

SPECIFICATIONS

Celcius	Fahrebheit	Display Counts
-50°C~750°C	-58°F~1382°F	2000

MAIN APPLICATIONS

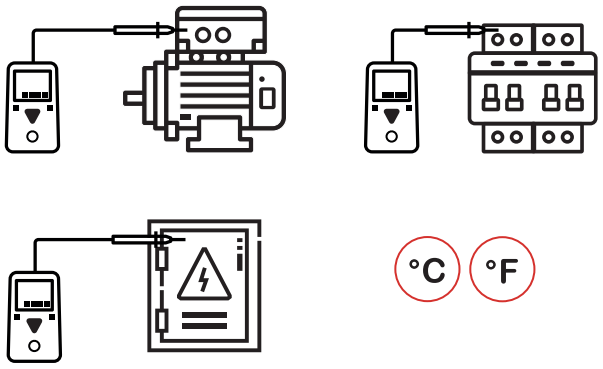

CONTENTS

125.5×72×27mm
5.6"×2.8"×1.0"
145g/0.30lb

1×9V 6F22
Battery

ACCESSORIES
K type thermocouple
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L105×W40×H145mm

Carton Box
42×31.5×34cm

X 60PCS



DIGITAL THERMO-HYGROMETER

MS6505

SKU NO.: MS6505CBGLO
UPC CODE: 810053675229
EAN CODE: 8435394783222


FEATURE

- Auto Power Off.
- MAX/MIN.
- Clock.
- Data logging 16300 groups.

SPECIFICATIONS

Temperature	Display Counts
-20°C~60°C/-4°F~140°F	2000

MAIN APPLICATIONS

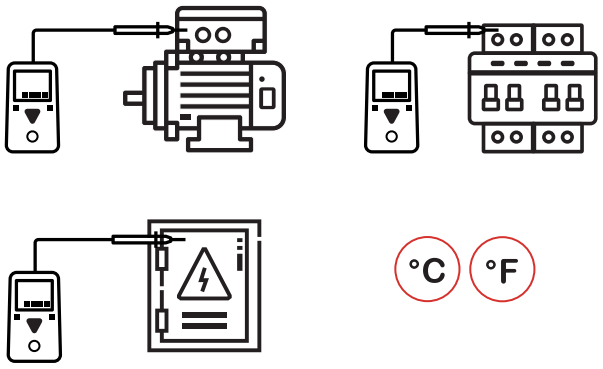

CONTENTS

183×74×42mm
7.3"×2.9"×1.6"
330g/0.7lb

1×9V 6F22
Battery

ACCESSORIES
RS232 date line
Software CD
Carry bag
AC adapter
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L172×W80×H255mm

Carton Box
53×44.5×37cm

X 20PCS



DIGITAL THERMOMETER

MS6511

SKU NO.: MS6511CBGLO
UPC CODE: 810053675243
EAN CODE: 8435394783246


FEATURE

- Auto Power Off.
- Data Hold.
- MAX/MIN/AVG.
- Low Battery Display.

SPECIFICATIONS

Type	Channel
K, J, T, E	TC

MAIN APPLICATIONS

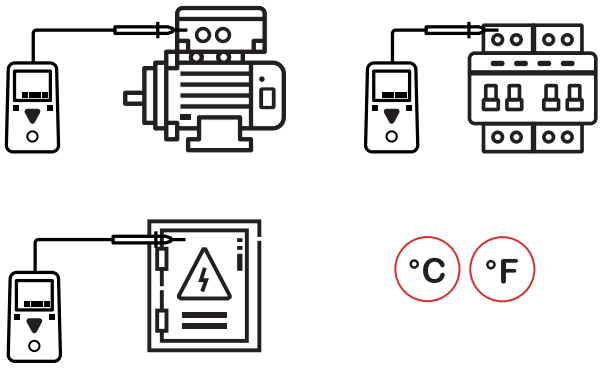

CONTENTS

- 190×89×42mm 7.5"×3.5"×1.7" 350g/0.8lb
- 1×9V 6F22 Battery
- ACCESSORIES: K type thermocouple Battery
- Calibration Certificate
- QSG: Quick Start Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL THERMOMETER

MS6512

SKU NO.: MS6512CBGLO
UPC CODE: 810053672945
EAN CODE: 8435394778679


FEATURE

- Auto Power Off.
- Data Hold.
- MAX/MIN/AVG.
- Low Battery Display.

SPECIFICATIONS

Type	Channel
K, J, T, E	T1/T2/T1-T2

MAIN APPLICATIONS

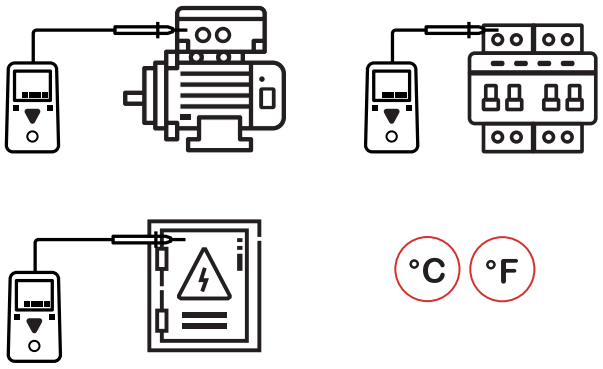

CONTENTS

- 190×89×42mm 7.5"×3.5"×1.7" 350g/0.8lb
- 1×9V 6F22 Battery
- ACCESSORIES: K type thermocouple Battery
- Calibration Certificate
- QSG: Quick Start Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL THERMOMETER

MS6513

SKU NO.: MS6513CBGLO
UPC CODE: 810053672044
EAN CODE: 8435394783253


FEATURE

- Auto Power Off.
- Data Hold.
- Memory Save Data.
- USB Interface.

SPECIFICATIONS

Type	Channel
K, J, T, E, R, S, N	TC

MAIN APPLICATIONS

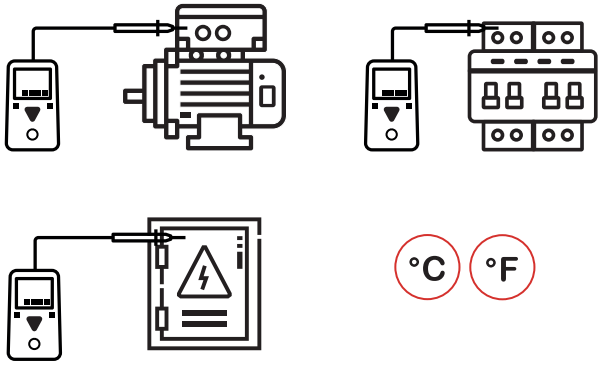

CONTENTS

190×89×42mm
7.5"×3.5"×1.7"
350g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
K type thermocouple
USB interface cable
Software CD
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



DIGITAL THERMOMETER

MS6514

SKU NO.: MS6514CBGLO
UPC CODE: 810053672037
EAN CODE: 8435394777764


FEATURE

- Auto Power Off.
- Data Hold.
- Memory Save Data.
- USB Interface.

SPECIFICATIONS

Type	Channel
K, J, T, E, R, S, N	T1/T2/T1-T2

MAIN APPLICATIONS

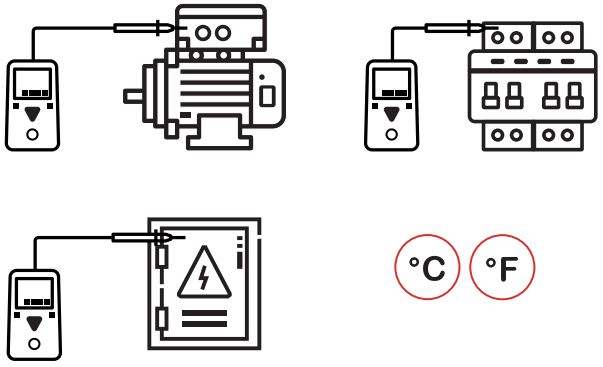

CONTENTS

190×89×42mm
7.5"×3.5"×1.7"
350g/0.8lb

1×9V 6F22
Battery

ACCESSORIES
K type thermocouple
USB interface cable
Software CD
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L165×W70×H225mm

Carton Box
47×37.5×35.5cm

X 20PCS



INFRARED THERMOMETER

MS6522A

SKU NO.: MS6522ACBGLO
UPC CODE: 810053674567
EAN CODE: 8435394779638


FEATURE

- Spectral Response 8-14 μm.
- Laser <1mW/630-670nm.
- Response Time 1 Second.
- Relative Humidity 10%~90%

SPECIFICATIONS

Repeatability	Temperature	Emissivity
±0.1°C	-20°C~300°C/-4°F~572°F	0.95

MAIN APPLICATIONS

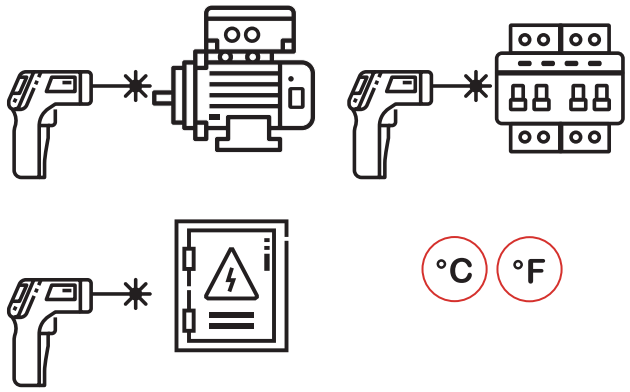

CONTENTS

- 143×99×47mm 5.6"×3.9"×1.85" 135g/0.3lb
- 2x1.5V AAA Batteries
- Battery (ACCESSORIES)
- Calibration Certificate
- Quick Start Guide (QSG)

PACKAGING INFORMATION

Color Box
L125×W55×H183mm

Carton Box
57.5×39.1×27.5cm

X 40PCS



INFRARED THERMOMETER

MS6522B

SKU NO.: MS6522BCBGLO
UPC CODE: 810053672617
EAN CODE: 8435394778914

FEATURE


- Spectral Response 8-14 μm.
- Laser <1mW/630-670nm.
- Response Time 1 second.
- Relative Humidity 10%~90%

SPECIFICATIONS

Repeatability	Temperature
±0.1°C	-20°C~500°C/-4°F~932°F

Emissivity
0.95

MAIN APPLICATIONS

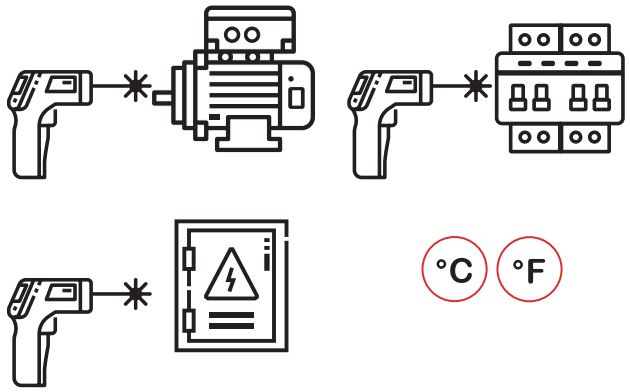

CONTENTS

143×99×47mm
5.6"×3.9"×1.85"
135g/0.3lb

2x1.5V AAA Batteries

Battery

ACCESSORIES

Calibration Certificate

QSG

Quick Start Guide

PACKAGING INFORMATION

Color Box
L125×W55×H183mm

Carton Box
57.5×39.1×27.5cm

X 40PCS



INFRARED THERMOMETER COLOR LCD

MS6531B

SKU NO.: MS6531BCBGLO
UPC CODE: 810053672969
EAN CODE: 8435394778693

FEATURE


- Color Display.
- Auto Power Off.
- Spectral Response 8-14 μm.
- Laser <1mW/630-670nm.

SPECIFICATIONS

IRT Temperature	Repeatability
-40°C~800°C/-40°F~1472°F	±0.1°C

Emissivity
0.10~1.00

MAIN APPLICATIONS

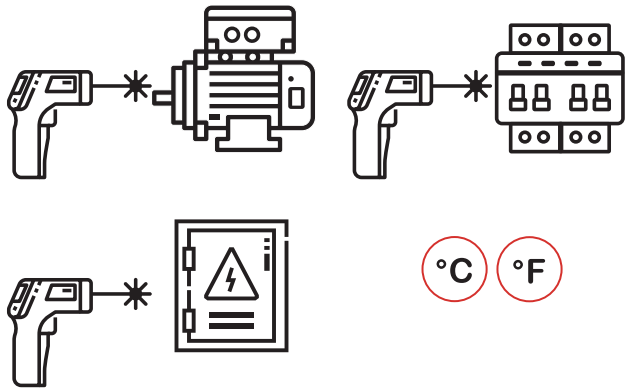

CONTENTS

- 176×132×49mm
  6.9"×5.2"×1.9"
  223g/0.5lb
- 1×9V 6F22 Battery
- Carry bag
  Battery
  ACCESSORIES
- Calibration Certificate
- Quick Start Guide

PACKAGING INFORMATION

Color Box
L126×W58×H210mm

Carton Box
44.5×34×28cm

X 20PCS



INFRARED THERMOMETER COLOR LCD

MS6531C

SKU NO.: MS6531CCBGLO
UPC CODE: 810053674284
EAN CODE: 8435394779355


FEATURE

- Color Display.
- Auto Power Off.
- Spectral Response 8-14 μm.
- Laser <1mW/630-670nm.

SPECIFICATIONS

IRT Temperature **-40°C~800°C/-40°F~1472°F**	Repeatability **±0.1°C**
K-Type Temperature **-40°C~1080°C/-40°F~1976°F**	Emissivity **0.10~1.00**

MAIN APPLICATIONS

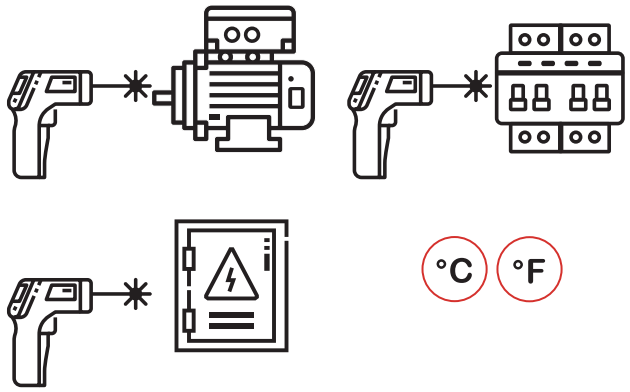

CONTENTS

176×132×49mm
6.9"×5.2"×1.9"
223g/0.5lb

1×9V 6F22
Battery

ACCESSORIES
K type thermocouple
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L126×W58×H210mm

Carton Box
44.5×34×28cm

X 20PCS



INFRARED THERMOMETER

MS6541

SKU NO.: MS6541CBGLO
UPC CODE: 810053674291
EAN CODE: 8435394779362


FEATURE

- Color Display.
- Auto Power Off.
- Spectral Response 8-14 μm.
- Laser <1mW/630-670nm.

SPECIFICATIONS

IRT Temperature **-50°C~760°C/-58°F~1400°F**	Repeatability **±0.1°C**
K-Type Temperature **-50°C~300°C/-58°F~572°F**	Emissivity **0.10~1.00**

MAIN APPLICATIONS

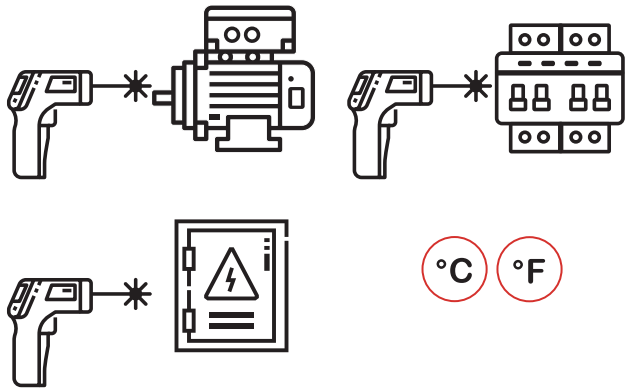

CONTENTS

192×95×83mm
7.5"×3.7"×3.3"
275g/0.6lb

1×9V 6F22
Battery

ACCESSORIES
K type thermocouple
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L126×W58×H210mm

Carton Box
44.5×34×28cm

X 20PCS

ENVIRONMENTAL METERS

SOUND LEVEL METER | ANEMOMETER | LIGHT METER
MOISTURE TESTER | TACHOMETERS | GAS DETECTOR
MULTI-FUNCTIONS ENVIRONMENT TESTER | DISTANCE METERS
ELECTRONIC STUD METAL FINDER | VOLTAGE AND CURRENT
CALIBRATOR





DIGITAL SOUND LEVEL METER

MS6700

SKU NO.: MS6700CBGLO
UPC CODE: 810053676691
EAN CODE: 8435394784779

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Dynamic 50dB.
- Frequency 31.5Hz~8kHz.

SPECIFICATIONS

Sound Level	Frequency	Dynamic
30dB~130dB	31.5Hz~8KHz	50dB

Display Counts
2000

MAIN APPLICATIONS

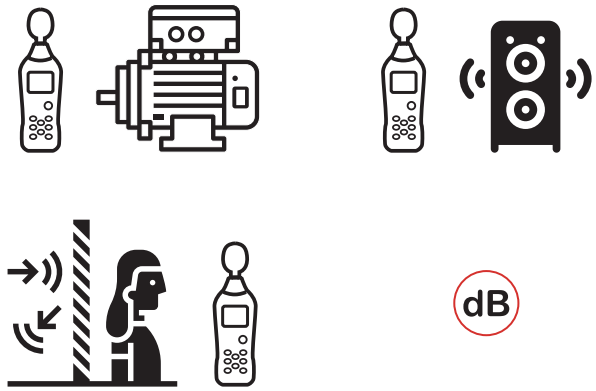

CONTENTS

265×80×69mm
10.4"×3.15"×2.7"
317g/0.7lb

6×1.5V AAA
Batteries

ACCESSORIES
Windscreen
Earphone plug
Wapping case
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L160×W74×H295mm

Carton Box
38.5×32×34cm

X 10PCS



DIGITAL SOUND LEVEL METER

MS6701

SKU NO.: MS6701CBGLO
UPC CODE: 810053674321
EAN CODE: 8435394779393

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Dynamic 50dB.
- Frequency 31.5Hz~8kHz.

SPECIFICATIONS

Sound Level	Frequency	Dynamic
30dB~130dB	31.5Hz~8KHz	50dB

Data Recording	Display Counts
16000	2000

MAIN APPLICATIONS

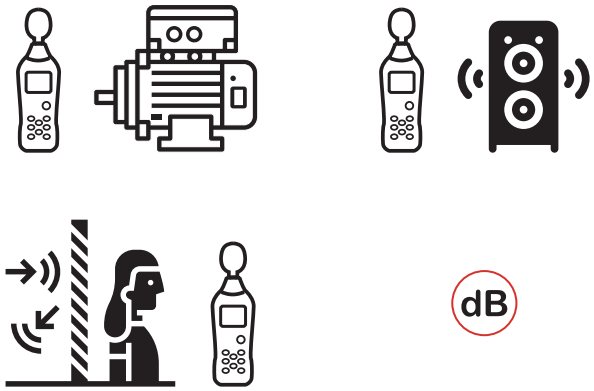

CONTENTS

265×80×69mm
10.4"×3.15"×2.7"
317g/0.7lb

6×1.5V AAA Batteries

ACCESSORIES
Windscreen
Earphone plug
Wapping case
USB Interface cable
Software CD
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L160×W74×H295mm

Carton Box
38.5×32×34cm

X 10PCS



DIGITAL SOUND LEVEL METER

MS6708

SKU NO.: MS6708CBGLO
UPC CODE: 810053674338
EAN CODE: 8435394779409

FEATURE


- Auto & Manual Ranging.
- Auto Power Off.
- Dynamic 50dB.
- Loudness Measurement..

SPECIFICATIONS

Sound Level	Frequency	Dynamic
30dB~130dB	10Hz~8kHz	50dB

Display Counts
2000

MAIN APPLICATIONS

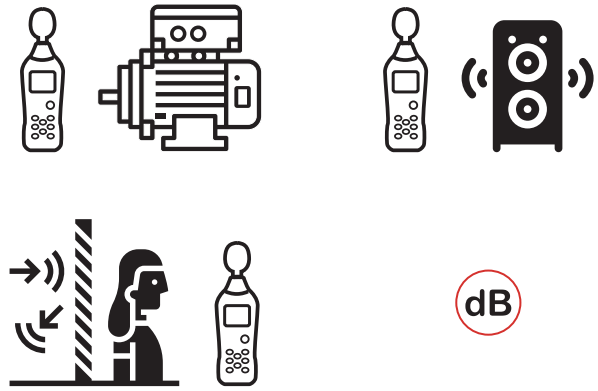

CONTENTS

193×60×29mm
7.6"×2.4"×1.1"
222g/0.48lb

4×1.5V AAA
Batteries

ACCESSORIES
Windscreen
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION


Color Box
L95×W45×H230mm

Carton Box
49.5×27×41cm

X 40PCS



MAIN APPLICATIONS

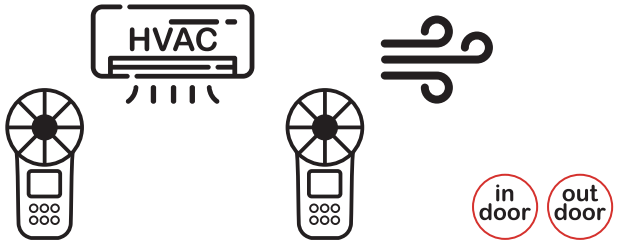

CONTENTS

- 165×85×38mm 6.5"×3.3"×1.5" 168g/0.37lb
- 1×9V 6F22 Battery
- ACCESSORIES: Carry bag, Battery, Detector bracket (optional)
- Calibration Certificate
- Quick Start Guide

PACKAGING INFORMATION

Color Box
L110×W60×H190mm

Carton Box
40×33.5×24cm

X 20PCS

DIGITAL ANEMOMETER

MS6252A

SKU NO.: MS6252ACBGLO
UPC CODE: 810053672181
EAN CODE: 8435394777900

FEATURE

- Display 9999 Counts With Backlight.
- Flow Area Setting.
- MAX/MIN.
- Data Hold.

SPECIFICATIONS

m/s 0.80~40.00m/s	km/h 2.88~144.0km/h	ft/s 2.62~131.2ft/s
Knots 1.6~77.70knots	mile/h 1.8~90.00mil/h	ft/m 157.5~7874ft/m
Display Counts 9999		



DIGITAL ANEMOMETER

MS6252B

SKU NO.: MS6252BCBGLO
UPC CODE: 810053673096
EAN CODE: 8435394778822


FEATURE

- USB Interface.
- Display 9999 Counts With Backlight.
- Temperature Mode.
- MAX/MIN/Data Hold.

SPECIFICATIONS

m/s 0.80~40.00m/s	km/h 2.88~144.0km/h	ft/s 2.62~131.2ft/s
Knots 1.6~77.70knots	mile/h 1.8~90.00mil/h	ft/m 157.5~7874ft/m
Temperature -10°C~60°C/14°F~140°F		Display Counts 9999

MAIN APPLICATIONS

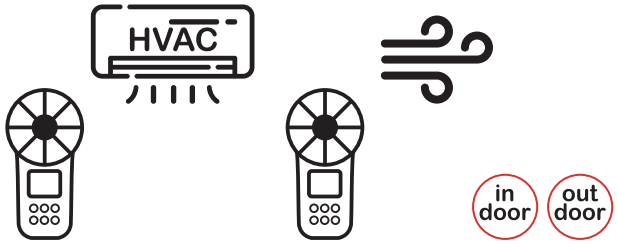

CONTENTS

165×85×38mm
6.5"×3.3"×1.5"
168g/0.37lb

1×9V 6F22
Battery

ACCESSORIES
Carry bag
Battery
USB interface cable
Software CD

Detector bracket
(optional)

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L110×W60×H190mm

Carton Box
40×33.5×24cm

X 20PCS



DIGITAL ANEMOMETER

MS6252D

SKU NO.: MS6252DCBGLO
UPC CODE: 810053676813
EAN CODE: 8435394785349


FEATURE

- Wireless Interface.
- Display 9999 Counts With Backlight.
- Temperature Mode.
- MAX/MIN/Data Hold.

SPECIFICATIONS

m/s 0.80~40.00m/s	km/h 2.88~144.0km/h	ft/s 2.62~131.2ft/s
Knots 1.6~77.70knots	mile/h 1.8~90.00mil/h	ft/m 157.5~7874ft/m
Temperature -10°C~60°C/14°F~140°F		Display Counts 9999

MAIN APPLICATIONS

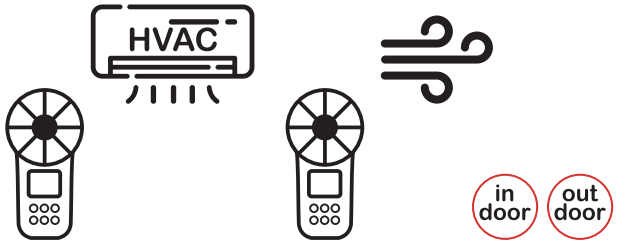

CONTENTS

- 165×85×38mm 6.5"×3.3"×1.5" 168g/0.37lb
- 1×9V 6F22 Battery
- ACCESSORIES: Carry bag, Battery, Detector bracket (optional)
- Calibration Certificate
- QSG: Quick Start Guide

PACKAGING INFORMATION

Color Box
L110×W60×H190mm

Carton Box
40×33.5×24cm

X 20PCS



DIGITAL LIGHTMETER [LUX]

MS6610

SKU NO.: MS6610CBGLO
UPC CODE: 810053673058
EAN CODE: 8435394778785

FEATURE

- Data Hold.
- Silicon Photo Diode with Filter Photo Detector.
- Lead Length 150cm (Approx).
- Low Battery Indicator.

SPECIFICATIONS

LUX Ranging	Display Counts
50,000	2000

MAIN APPLICATIONS



CONTENTS

126×72×27mm
5.0"×2.8"×1.0"
180g/0.4lb

Detector Size:
83×52×21mm
3.2"×2.0"×0.8"

ACCESSORIES
Carry bag
Battery

1×9V 6F22
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L115×W55×H165mm

Carton Box
48×34×31.5cm

X 40PCS



DIGITAL LIGHTMETER [LUX/FC]

MS6612

SKU NO.: MS6612CBGLO
UPC CODE: 810053674307
EAN CODE: 8435394779379

FEATURE

- Relative Measurement.
- Peak Measurement.
- Zero Calibration.
- LUX & FC unit selection.

SPECIFICATIONS

LUX Ranging	FC Ranging	Display Counts
200,000	20,000	2000

MAIN APPLICATIONS



CONTENTS

170×89×43mm
6.7"×3.5"×1.7"
420g/0.93lb

1×9V 6F22
Battery

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L110×W60×H190mm

Carton Box
40×33.5×24cm

X 20PCS



DIGITAL LIGHTMETER [LUX/FC/CD]

MS6612B

SKU NO.: MS6612BCBGLO
UPC CODE: 810053674314
EAN CODE: 8435394779386

FEATURE

- Relative Measurement.
- Peak Measurement.
- Zero Calibration.
- LUX, FC & CD unit selection.

SPECIFICATIONS

CD Ranging	LUX Ranging	FC Ranging
999,900	200,000	20,000

Display Counts
2000

MAIN APPLICATIONS



CONTENTS

170×89×43mm
6.7"×3.5"×1.7"
420g/0.93lb

1×9V 6F22
Battery

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L110×W60×H190mm

Carton Box
40×33.5×24cm

X 20PCS



DIGITAL LIGHTMETER [LUX/FC/CD]

MS6612D

SKU NO.: MS6612DCBGLO
UPC CODE: 810053676820
EAN CODE: 8435394785356

FEATURE

- Relative Measurement.
- Peak Measurement.
- Zero Calibration.
- LUX, FC & CD unit selection.

SPECIFICATIONS

CD Ranging	LUX Ranging	FC Ranging
999,900	200,000	20,000

Display Counts
2000

MAIN APPLICATIONS



CONTENTS

170×89×43mm
6.7"×3.5"×1.7"
420g/0.93lb

1×9V 6F22
Battery

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L110×W60×H190mm

Carton Box
40×33.5×24cm

X 20PCS



MOISTURE TESTER

MS6900

SKU NO.: MS6900CBGLO
UPC CODE: 810053674376
EAN CODE: 8435394779447


FEATURE

- Verification Test Points.
- Depth 0~5mm.
- Sampling Rate 240ms.
- Unit Selection %, WB, TD, °C, °F, %RH.

SPECIFICATIONS

Material Moisture **0.0~60.0%**	Ambient TEMP **-10°C~50°C/14°F~122°F**
Relative Humidity **10~90%**	

MAIN APPLICATIONS

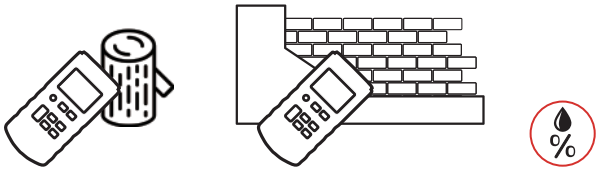

CONTENTS

130×56×29mm
5.1"×2.2"×1.1"
120g/0.26lb

2×1.5V AAA
Batteries

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L75×W55×H155mm

Carton Box
61×33×25cm

X 60PCS



MOISTURE TESTER

MS6900A

SKU NO.: MS6900ACBGLO
UPC CODE: 810053675298
EAN CODE: 8435394783314


FEATURE

- Verification Test Points.
- Depth 0~5mm.
- Sampling Rate 240ms.
- Unit Selection %, WB, TD, °C, °F, %RH.

SPECIFICATIONS

Material Moisture **0.0~60.0%**	Ambient TEMP **-10°C~50°C/14°F~122°F**
Relative Humidity **10~90%**	

MAIN APPLICATIONS

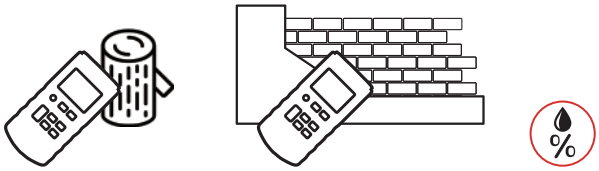

CONTENTS

130×56×29mm
5.1"×2.2"×1.1"
120g/0.26lb

2×1.5V AAA
Batteries

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L75×W55×H155mm

Carton Box
61×33×25cm

X 60PCS



DIGITAL TACHOMETER (Contact)

MS6208A

SKU NO.: MS6208ACBGLO
UPC CODE: 810053672167
EAN CODE: 8435394777887


FEATURE

- Contact Measuring Mode.
- Unit Selection m/min, m/sec, ft/min, ft/sec, in/min
- Auto Power Off.

SPECIFICATIONS

Ranging (contact)
50~19,999RPM

MAIN APPLICATIONS

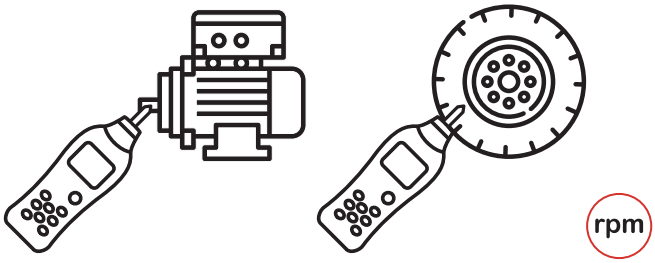

CONTENTS

170×60×27mm
6.7"×2.4"×1.1"
130g/0.28lb

4×1.5AAA
Batteries

ACCESSORIES
Measurement idler wheels
Touch tips
Lengthening bar
Carry bag
Battery

Calibration Certificate

QSG
Quick Start Guide

PACKAGING INFORMATION

Color Box
L95×W45×H195mm

Carton Box
41.5×27×41cm

X 40PCS



DIGITAL TACHOMETER (Non-Contact)

MS6208B

SKU NO.: MS6208BCBGLO
UPC CODE: 810053672174
EAN CODE: 8435394777894


FEATURE

- Non-Contact Measuring Mode.
- Measuring Distance 50mm~250mm.
- Auto Power Off.
- MAX/MIN.

SPECIFICATIONS

Ranging (non-contact)
50~99,999 RPM

MAIN APPLICATIONS

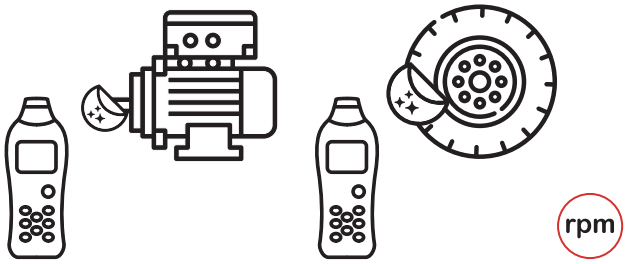

CONTENTS

155×60×27mm
6.1"×2.4"×1.1"
120g/0.26lb

4×1.5 AAA
Batteries

ACCESSORIES
Reflective sheetin
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L95×W45×H195mm

Carton Box
41.5×27×41cm

X 40PCS



COMBUSTIBLE GAS DETECTOR

MS6310

SKU NO.: MS6310CBGLO
UPC CODE: 810053672334
EAN CODE: 8435394778242

FEATURE

- Easy to Identify and Pinpoint Gas Leaks.
- Portable and High Sensitivity.
- Resume Original Measurement State After 7~10 Minutes in Clear Air.

SPECIFICATIONS

Resolution	Alarm
50ppm	10%~40%

MAIN APPLICATIONS



CONTENTS

172×70×465mm
6.8"×2.8"×1.8"
354g/0.78lb

4×1.5 AA
Batteries

ACCESSORIES
Carry bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color Box
L130×W63×H255mm

Carton Box
53×34×28.5mm

X 20PCS



MULTI-FUNCTIONS ENVIRONMENT TESTER

MS6300

SKU NO.: MS6300CBGLO
UPC CODE: 810053672594
EAN CODE: 8435394778235


FEATURE

- AVG / MAX / MIN / DIF (MAX-MIN)
- A/C Weighting Indication.
- Data Hold.
- Display Backlight.

SPECIFICATIONS

Sound Level 30~130dB(A)	Luminance 0~50,000LUX	Wind Speed 0.5~20m/s
Air Flow 999,900CMM/CFM		Humidity 20~80%RH
Temperature -10°C~60°C/14°F~140°F		

MAIN APPLICATIONS

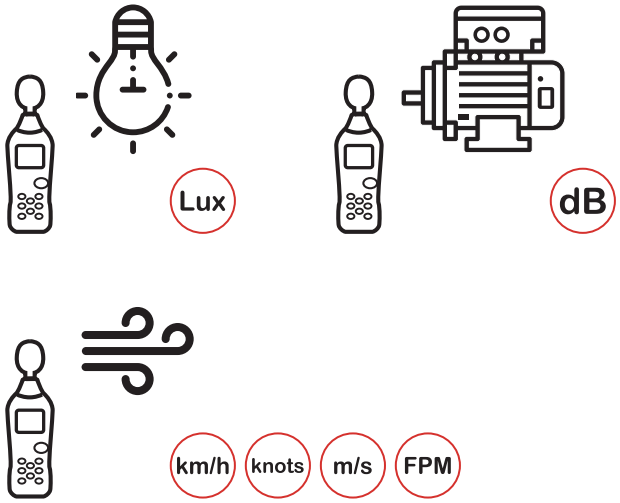

CONTENTS


280×89×50mm
11.0"×3.5"×2.0"
433g/0.95lb


1×9V 6F22
Battery



Windbreak
Holder
Wrapping case
Battery


Calibration
Certificate



Quick Start
Guide

PACKAGING INFORMATION


Color Box
L325×W80×H160mm


Carton Box
42×35×35cm


X 10PCS



DISTANCE METER

MS6404/06/08

SKU NO.	MS6404CBGLO	MS6406CBGLO	MS6408CBGLO
UPC CODE	810053674246	810053676837	810053676844
EAN CODE	8435394779317	8435394786209	8435394786216

FEATURE


- Automatically cut off laser 20s.
- Automatic shutdown 150s.
- Data Logging 30 groups.
- MIN & MAX measurement.


SPECIFICATIONS

Distance(MS6404)	Distance(MS6406)	Distance(MS6408)
40m	60m	80m

Accuracy	Unit
±2.0mm	mm / inch / ft

MAIN APPLICATIONS

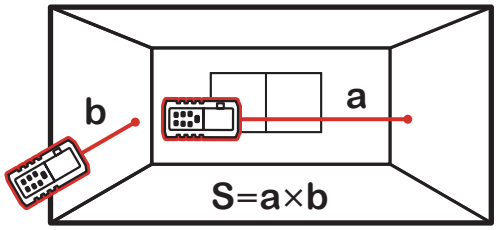

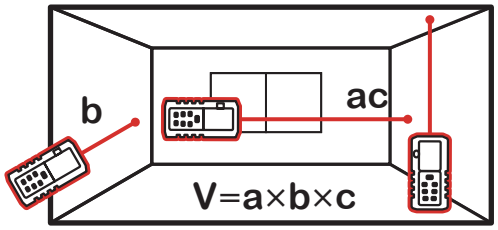

CONTENTS

112×52×27mm
4.4"×6.0".0×1"
120g/0.26lb

2×1.5V AAA
Batteries

ACCESSORIES
Portable bag
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION

Color-Box
L75×W55×H155mm

Carton Box
61×33×25cm

X 60PCS



ELECTRONIC STUD METAL FINDER

MS6906

SKU NO.: MS6906CBGLO
UPC CODE: 810053674574
EAN CODE: 8435394779645


FEATURE

- Auto Power Off.
- Low Battery Display.
- Display Backlight, Work Light.

SPECIFICATIONS

Wooden Pillar **30mm**	Metal Stud Detection Depth **30mm**
Metal Pipe Detector Depth **50mm**	
AC Voltage Detector Depth(50~600VAC) **75mm**	

MAIN APPLICATIONS



CONTENTS

160×74×42mm
6.3"×2.9"×1.65"
154g/0.33lb

1×9V 6F22
Battery

ACCESSORIES
Battery

Calibration
Certificate

QSG
Quick Start
Guide

PACKAGING INFORMATION


Color Box
L145×W60×H188mm

Carton Box
40×32×31.5cm

X 20PCS



MAIN APPLICATIONS

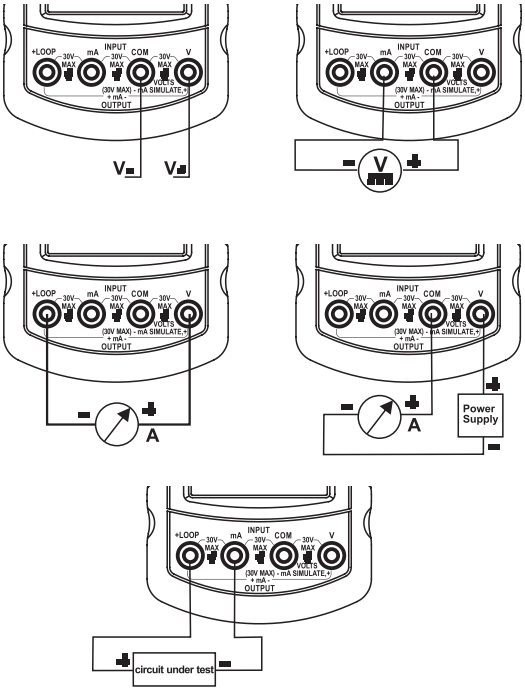

CONTENTS

- 190×89×42mm
  7.5"×3.5"×1.7"
  350g/0.77lb
- 1×9V 6LR61 Battery
- ACCESSORIES: Test leads, Wapping case, Battery
- Calibration Certificate
- QSG: Quick Start Guide

PACKAGING INFORMATION

- **Color Box** L188×W88×H264mm
- **Carton Box** 47×31×39.5cm
- **X 10PCS**

VOLTAGE AND CURRENT CALIBRATOR

MS7221

SKU NO.: MS7221CBGLO
UPC CODE: 810053672020
EAN CODE: 8435394777757


FEATURE

- Selection of Absolute or Percentage Value in Amp Mode
- Calibration and Simulation of External Transductors
- LOOP Mode

SPECIFICATIONS

DC Voltage (Input/Output) **0~100mV, 0~10V**	DC Current **0~24mA**
DC Voltage (Loop) **0~24V**	

TEST LEADS
T3009U



CAT III 1000V
CAT IV 600V

SKU NO..	UPC CODE	EAN CODE
T3009UPEGLO		

- Probe Length: 146mm/ø10.2mm
  Right Angle Type, M4 screw
- Length: 1200mm
- Tip: ø2mm
- Plug: ø4.5mm
- Wire: UL 1803/18AWG
- MAX 10A

TEST LEADS
T3030U



CAT II 1000V
CAT III 600V

SKU NO..	UPC CODE	EAN CODE
T3030UPEGLO	810053672778	8435394778419

- Probe Length: 143mm/ø10mm
- Length: 1000mm
- Tip: ø2mm
- Plug: ø4.5mm
- Wire: UL 1803/18AWG
- MAX 10A

TEST LEADS
T3016U



SKU NO..	UPC CODE	EAN CODE
T3016UPEGLO	810053674000	8435394779072

- Probe Length: 132mm/ø10mm
  Right Angle Type, M4 screw
- Length: 1000mm
- Tip: ø2mm
- Plug: ø4.5mm
- Wire: UL 1803/18AWG
- MAX 10A

TEST LEADS
T3033U



CAT III 1000V
CAT IV 1000V

SKU NO..	UPC CODE	EAN CODE
T3033UPEGLO	810053672785	8435394778426

- Probe Length: 119mm/ø9mm
- Length: 800mm
- Tip: ø2mm
- Plug: ø4.5mm
- Wire: UL 1803/20AWG
- MAX 10A

TEST LEADS
T3022



CAT II 1000V

SKU NO..	UPC CODE	EAN CODE
T3022PEGLO	810053674017	8435394779089

- Straight Type & Right Angle Type
- Length: 1000mm
- Plug: ø4.5mm
- Wire: UL 1803/18AWG
- MAX 10A

TEST LEADS
T3060A



CAT II 1000V
CAT III 600V

SKU NO..	UPC CODE	EAN CODE
T3060APEGLO	810053674819	8435394783482

- Probe Length: 132mm/ø10mm
  Right Angle Type, M4 screw
- Length: 1000mm
- Tip: ø2mm
- Plug: ø4.5mm
- Wire: UL 1803/18AWG
- MAX 10A

TEST LEADS

T3060B



CAT II 1000V
CAT III 600V

SKU NO..	UPC CODE	EAN CODE
T3060BPEGLO	810053674826	8435394779881

- Probe Length: 132mm/ø10mm Right Angle Type, M4 screw
- Length: 1500mm
- Tip: ø2mm
- Plug: ø4.5mm
- Wire: UL 1803/18AWG
- MAX 10A

TEST LEADS

T3103



CAT II 1000V

SKU NO..	UPC CODE	EAN CODE
T3103PEGLO	810053674024	8435394779096

- Straight Type
- Length: 1340mm
- Plug: ø4.5mm
- Wire: UL 1803/18AWG
- MAX 10A

Big Mouth Alligator Clip

C3107



SKU NO..	UPC CODE	EAN CODE
C3107PEGLO	810053674031	8435394779102

- Length: 87mm
- ø4mm cross plug
- Max 32A

Alligator Clip

C3109A



SKU NO..	UPC CODE	EAN CODE
C3109APEGLO	810053674901	8435394782355

- Length: 61.5mm
- with M4 screw

Medium Alligator Clip

C3109B



SKU NO..	UPC CODE	EAN CODE
C3109BPEGLO	810053673249	8435394778723

- Length: 55mm
- with M4 screw

IC Test Clip

C3112



SKU NO..	UPC CODE	EAN CODE
C3112PEGLO	810053675014	8435394783451

- Length: 185mm
- Plug: ø4mm Jack
- Max 5A

THERMOCOUPLES

P3400



SKU NO..	UPC CODE	EAN CODE
P3400PEGLO	810053676752	8435394779867

- Length:1000mm
- Ranging:-40~260°C(-40~500°F)

THERMOCOUPLES

P3408A



SKU NO..	UPC CODE	EAN CODE
P3408APEGLO	810053675410	8435394783482

- Length:1000mm
- Ranging:-40~260°C(-40~500°F)
- Plug lenth : 12mm

THERMOCOUPLES

P3401



SKU NO..	UPC CODE	EAN CODE
P3401PEGLO	810053674888	8435394782096

- Length:1000mm
- Ranging:-40~260°C(-40~500°F)

THERMOCOUPLES

P3409A



SKU NO..	UPC CODE	EAN CODE
P3409APEGLO	810053675434	8435394783505

- Length:1000mm
- Ranging:-40~800°C(-40~1472°F)
- Plug lenth : 12mm

THERMOCOUPLES

P3408B



SKU NO..	UPC CODE	EAN CODE
P3408BPEGLO	810053675427	8435394783499

- Length:1000mm
- Ranging:-40~260°C(-40~500°F)
- Plug lenth : 16mm

THERMOCOUPLES

P3409B



SKU NO..	UPC CODE	EAN CODE
P3409BPEGLO	810053674802	8435394779867

- Length:1000mm
- Ranging:-40~800°C(-40~1472°F)
- Plug lenth : 16mm

THERMOCOUPLES

P3410



SKU NO..	UPC CODE	EAN CODE
P3410PEGLO	810053675441	8435394783512

- Length:1000mm
- Ranging:-40~600°C(-40~1112°F)

THERMOCOUPLES

P3412



SKU NO..	UPC CODE	EAN CODE
P3412PEGLO	810053675458	8435394783529

- Length:1000mm
- Ranging:-40~260°C(-40~500°F)

MASTECH®

www.mastech-group.com



AMERICAS
MGL America, Inc.
cs.na@mgl-intl.com
6509 Northpark Blvd Unit 400,
Charlotte, NC 28216 USA
Tel: +1 833 533-5899

APAC
MGL APPA Corporation
cs.apac@mgl-intl.com
Flat 4-1, 4/F, No. 35, Section 3
Minquan East Road. Taipei, Taiwan
Tel: +886 2-2508-0877

EMEA
MGL Euman S.L.
cs.emea@mgl-intl.com
C/ Picu Castiellu, Parcelas i1-i4
Argame, Morcin 33163, Asturias, Spain
Tel: +36 985-08-18-70

MEXICO & LATAM
MGL LATAM SA DE CV
cs.latam@mgl-intl.com
Colonia Industrial Vallejo Del.
Azcapotzalco 02300, Mexico DF
Tel: +1 883-533-5899

UNITED KINGDOM
POWER PROBE GROUP LIMITED
cs.uk@mgl-intl.com
14 Weller St, London, SE1 1QU, UK
Tel: +34 985-08-18-70

AN MGL® BRAND