



# Headers(Sockets) for pluggable terminal blocks / ECH & EHD series

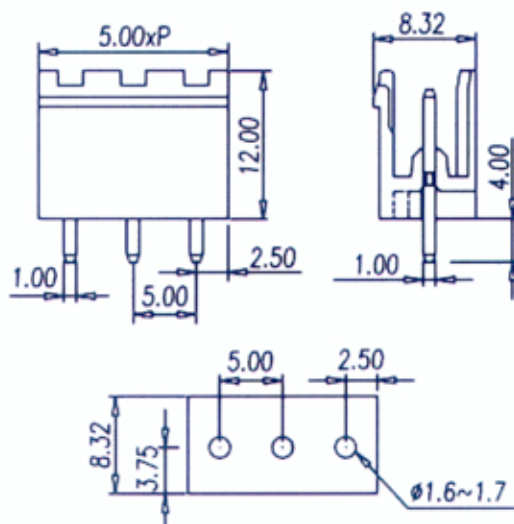

## 5EHDV

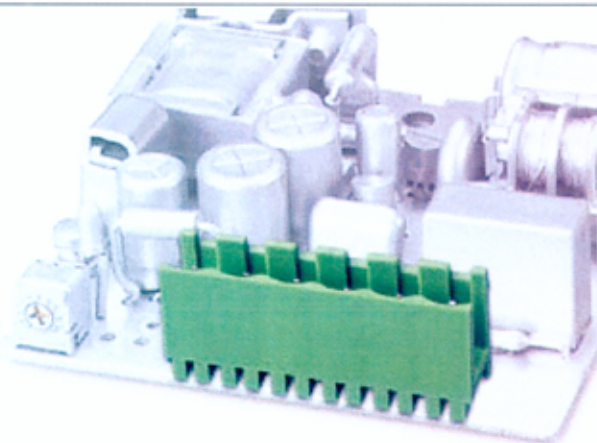

**Pitch: 5.00mm**

Approval



Technical Data

UL

IEC

Rated voltage

300V

250A

Rated current

15A

17.5A

Wire range

Solid wire (AWG)

Stranded wire (AWG/mm<sup>2</sup>)

Rated surge voltage (UL/IEC/Max.)

1.6 / 2 / 4 KV

Torque (Lb-in)

Screw

Wire strip length

Pole

Cat. No.

02

5EHDV-02P

:

:

:

:

24

5EHDV-24P