

# MP3 Adaptor cable

## additional adapter for MP3 Player, iPod, and Smartphone

The cinch-jack adapter allows to connect many MP3 Players, Smartphones, Laptops, and iPads to the HiFi system. Due to multiple signal shielding, pure materials, and precise workmanship the sonically convincing stereo audio connection is established within seconds - and you can enjoy your favorite music brought along in the living room.

- Y-cinch adapter for connection to HiFi systems/amplifiers
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances

### Specifications

#### Connections

Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	3.5 mm STEREO plug
Connector 1, connector length (mm):	30.3
Connector 1, connector width (mm):	9.8
Connector 1, connector height (mm):	8.0
Port 2, type:	2 x RCA plug (RCA)
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

#### cable


Type:	Round cable
Length (m):	1   1.5   2   3   5   7.5   10   15   20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	2 x 25 x 0.120
AWG:	23
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 96 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	3.9 + 6.0
Kink protection:	on both sides

#### Signal transmission


Transmission modes:	analog audio signals
max. Bandwidth (MHz):	10.0
Capacitance (pF):	155
Characteristic impedance (Ω):	50

#### General


Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10

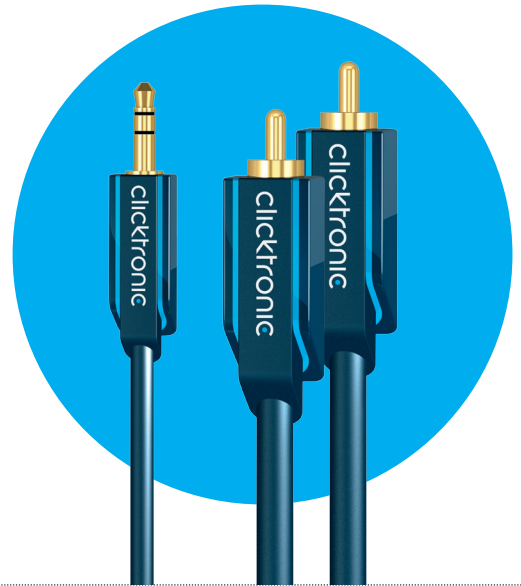

#### Cross section

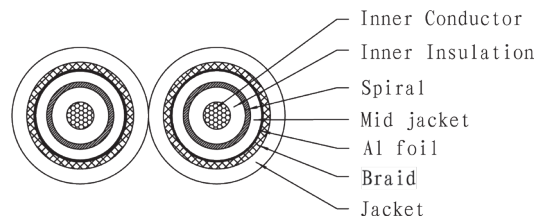



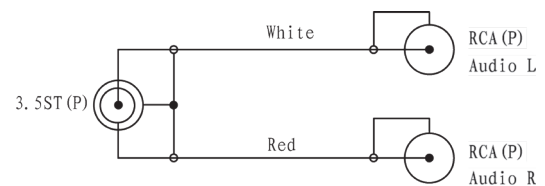





#### Wiring diagram



# MP3 Adaptor cable

additional adapter for MP3 Player, iPod, and Smartphone

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70465	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 704659
70467	2.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 704673
70468	3.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 704680
70469	5.00	Single carton: 185 x 180 x 40 Export VPE (30 pcs.): 425 x 270 x 235	Single carton: XX Master carton: XX		4 040849 704697
70470	7.50	Single carton: 185 x 180 x 40 Export VPE (30 pcs.): 425 x 270 x 235	Single carton: XX Master carton: XX		4 040849 704703
70471	10.0	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 704710
70473	15.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 704734
70474	20.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 704741

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany