


MESSOA®


NCB855 Network camera Megapixel Color Sensor Network Camera with Triple Streaming (MPEG-4 x 2/M-JPEG)

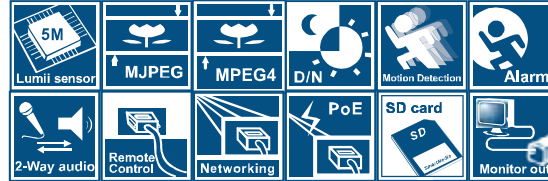

Specification

Image system	
Image sensor	1/2.5" 5 M Lumii sensor image optimized for low light performance
Effective pixels	Full scanning mode:2592 (H) X 1944 (V)
Image Compression Method	MPEG-4 x 2/Motion JPEG
Resolution	HD 720P (1280 X 720) @30 fps
	VGA (640 X 480), 352 (640 X 352),192 (352 X 192) @30 fps
Service Monitor output (For installation)	One Jack for composite video (Support PAL/ NTSC TV mode only) HD 720P 1280 X 720 @25 fps for PAL; @30 fps for NTSC VGA (640 X 480), 352 (642 X 352), 192 (352 X 192) @25 fps for PAL; @30 fps for NTSC
Electric	
Sync system	Internal
Lens Mount	CS mount
Gamma correction	0.45
Minimum illumination	0.3 lux. @ TV-Out (F1.2) 10 IRE
White balance	2500°K-9600°K
BLC	On(value:0-255) and OFF
Audio	Two-way Mono Audio; Full-duplex
Alarm	Yes; 1x DI & 1x DO
SD card slot	Yes; Support SDHC card (Micro SD)
Intelligent video	Video motion detection
Power supply	
Power requirement	DC12V/AC24V/ PoE
Power consumption	5W Max
Power connector	Screwless Terminal Jack
Environment	
Operating temperature	-10°C ~ 50°C (14°F ~ 122°F)
Operating humidity	80% RH or less
Storage temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Network	
Ethernet	1 x 10/100 base-T Ethernet connection for LAN/WAN,
Internet protocol	TCP/IP, UDP, HTTP, SMTP, DNS, DHCP, NTP, DDNS, FTP, RTP,RTSP over TCP or UDP, ICMP, IGMP, uPNP
Control interface	IE browser 6.0 or above
I/O connector	
Network port	RJ45 with LEDs
Video port	BNC
Audio in & out port	Phone Jack
Mechanism	
Dimensions(LxWxH)	180 x 66 x 55 mm (7.1" x 2.6" x 2.2")
Weight (Camera Only)	470 g (1 lb)
Software	Web client support Live view, Snapshot
Ordering information	
	NCB855-HN5
	NCB855-HP5

Dimensions

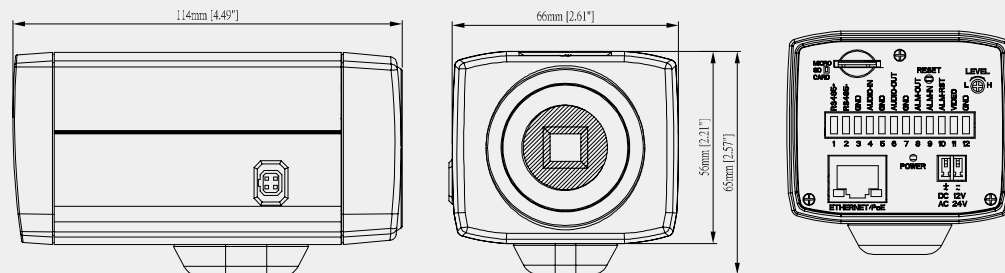

2009.3.25 version.

MESSOA reserves the right to update the NCB 855 datasheet at any time without notice.
MESSOA USA e-mail:info.us@messoa.com /MESSOA Taiwan e-mail:info@messoa.com

Secure in Knowledge
www.messoa.com