

D55

Mini Dome Camera




D55 is the Mini Metal Dome Camera specially designed for public bus, school bus, passenger transport. The special structure (easy assembly and disassembly, lockable angle, anti-vibration), the advantages of anti-interference, low power consumption, and 24 IR Infrared LED for superior night vision make this dome camera ideal for vehicle surveillance.

Key Features

- Metal Mini dome housing with fixed lens
- IP66 Water-proof & Vandal-proof
- Compact function for Shutter/Auto; BLC/Auto, AGC/Auto
- Dual Glass In Anti-reflection Design
- Lens Optional: 2.8/3.6/6.0mm for options
- Resolution: 600TVL/700TVL
- 24pcs leds, Night vision range 10~15m
- Easy installation on ceiling or wall, surface or flush mount
- High image quality and high low light performance
- Low power consumption

Dimension

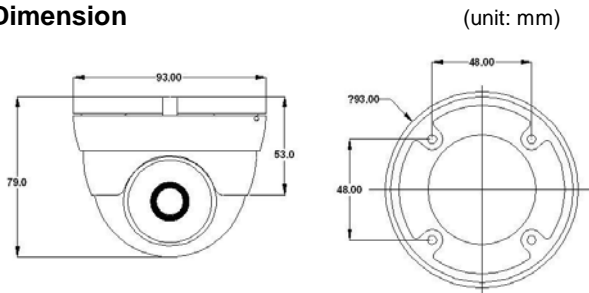

Package contains

- Camera x 1
- Instruction manual x 1
- Mounting screw x 3

Technical Specifications

Product series	Indoor Dome Camera
Model	D55
Imaging Device	1/3" Color SONY SuperHAD II CCD
TV System	NTSC/PAL
Effective Pixels (PAL/NTSC)	752(H) x 582(V) / 768(H) x 494(V)
Horizontal Resolution	600 TV lines
Minimum Illumination	0 Lux at F1.2 (Infrared LED on)
Scanning System	2:1 Interlace
Synchronization	Internal
S/N Ratio	≥ 50 dB (AGC off)
Auto Gain Control	Auto
White Balance	Auto
Electronic Shutter	Auto
Back Light Compensation	Auto
IR LED	24 LEDs with 850nm
IR night vision	10~15 meter
Video Output	1 Vp-p, 75Ω Composite
Audio	N/A
Mirror	N/A
Gamma Ratio	0.45
Lens	f2.8mm/3.6mm/6.0mm
Lens Mount	M12XP0.5mm Thread
Pan Adjusting	+/- 360°
Tilt Adjusting	0° ~ 45°
Input Voltage / Current	12V DC ±10%, 4 Pin Din
Power Consumption	310mA
Dimensions (W x H)	∅ 54 x 43.4 mm / ∅ 2.126" x 1.709"
Net Weight	370g / 0.8157lbs
Weatherproof	IP66
Working Temperature	-25°C ~ +65°C / -13°F ~ +149°F
Working Humidity	RH90% Max.
Certification	CE, FCC