

DB52

Mini Metal Dome Camera




DB52 is the Mini Metal Dome Camera specially designed for public bus, school bus, passenger transport. The special structure (easy assembly and disassembly, lockable angle, anti-vibration), the advantages of anti-interference, low power consumption and wide-angle lens make this dome camera ideal for vehicle surveillance.

Key Features

- Metal-cased IP66 weatherproof micro dome with fixed lens (2.2mm)
- Low power consumption
- Fish-eye lens
- Available in silver finish
- 8-18V DC power input
- Easy installation on ceiling or wall, surface or flush mount
- Optional standard surface mount adaptor
- Anti-vibration, vandal resistant
- Ideal for vehicle video surveillance

Dimension

(unit: mm)

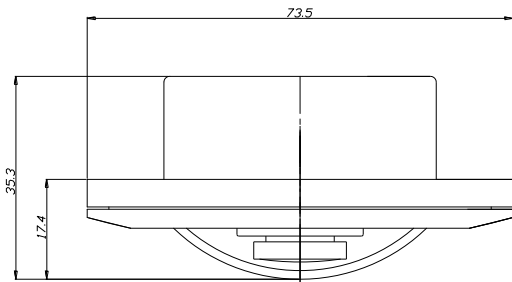

Package contains

- Camera x 1
- Instruction manual x 1
- Hex-key x 1
- Mounting screw x 4
- Mounting plug x 4

Technical Specifications

Product series	Outdoor Dome Camera
Model	DB52
Imaging Device	1/3" Color SONY CCD
TV System	NTSC/PAL
Effective Pixels (PAL/NTSC)	752(H) x 582(V) / 768(H) x 494(V)
Horizontal Resolution	600 TV lines
Minimum Illumination	0.1 Lux at F1.2
Scanning System	2:1 Interlace
Synchronization	Internal
S/N Ratio	≥ 50 dB (AGC off)
Auto Gain Control	Auto
White Balance	Auto
Electronic Shutter	Auto
Back Light Compensation	Auto
IR LED	N/A
IR night vision	N/A
Video Output	1 Vp-p, 75Ω Composite BNC Jack
Audio	Optional
Mirror	Optional
Gamma Ratio	0.45
Lens	f2.2mm wide-angle lens
Exterior Focus Adjustment	N/A
Lens Mount	M12XP0.5mm Thread
Pan Adjusting	+/- 180°
Tilt Adjusting	0° ~ 50°
Input Voltage / Current	8V – 18V DC
Power Consumption	80mA
Dimensions (W x H)	∅ 74.6 x 58.3 mm / ∅ 2.937" x 2.295"
Net Weight	130g / 0.2866lbs
Weatherproof	IP66
Working Temperature	-10°C~ +50°C / 14°F ~ +122°F
Working Humidity	RH90% Max.
Certification	N/A