

Features:

e-lock-600 Series electromagnetic locks offer cost effective solution with easy installation & suitable for variety of application . It has no moving part thus keeping maintenance to a minimum. All types of brackets are available to ease installation for both in-swing & out-swing doors.

Specification:

e-lock-600 / e-lock-600L

- 600lbs holding force
- Dual voltage 12 & 24 Vdc
- Current drawn 500mA / 250mA
- MOV surge protection
- Fail-Safe type
- Unmonitored Model (e-lock-600) & Monitored Model (e-lock-600L)
- Push-off button on armature for instant release
- Dimension : -


Magnet : 250(L) X 41(W) X 26(D) mm

Armature Plate : 170(L) X 38(W) X 11(D) mm



e-lock-600 Series


User Guide

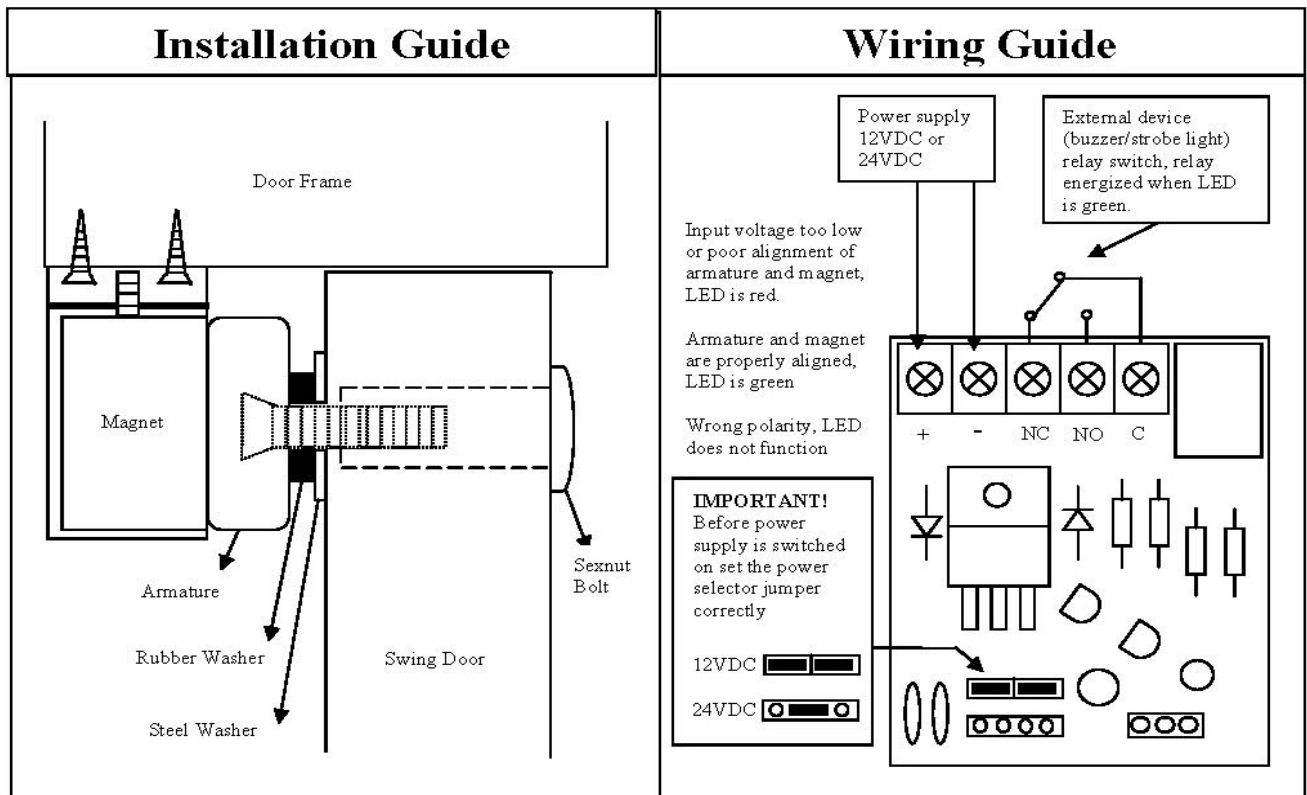

Optional Brackets:

EL-BKL (L Bracket)

- Adjustable "L" bracket for outward door when the header is narrow.
- Available for elock-300, 600 & 1200 Series

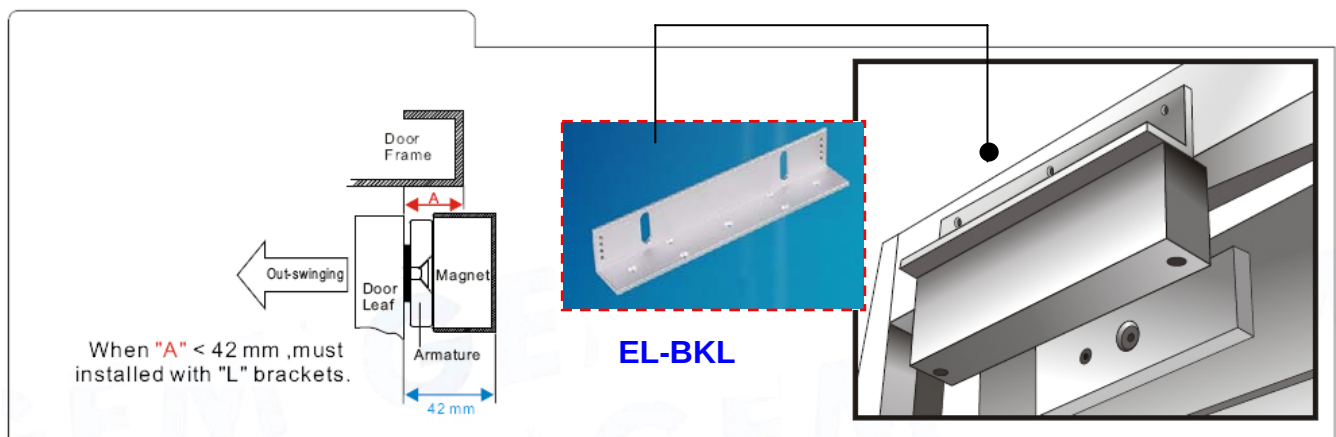


KYODENSHA TECHNOLOGIES (M) SDN BHD

7, Jalan 1/15, Taman Industri Puchong,
 Bt 12, Jalan Puchong, Selangor, Malaysia
 Tel: +60 3 80613201 Fax: +60 3 80613816
 Website: www.elock2u.com




EL-BKZ (ZL Bracket)

- Adjustable "ZL" bracket for inward door application.
- Available for e-lock-300, 600 & 1200 Series application.

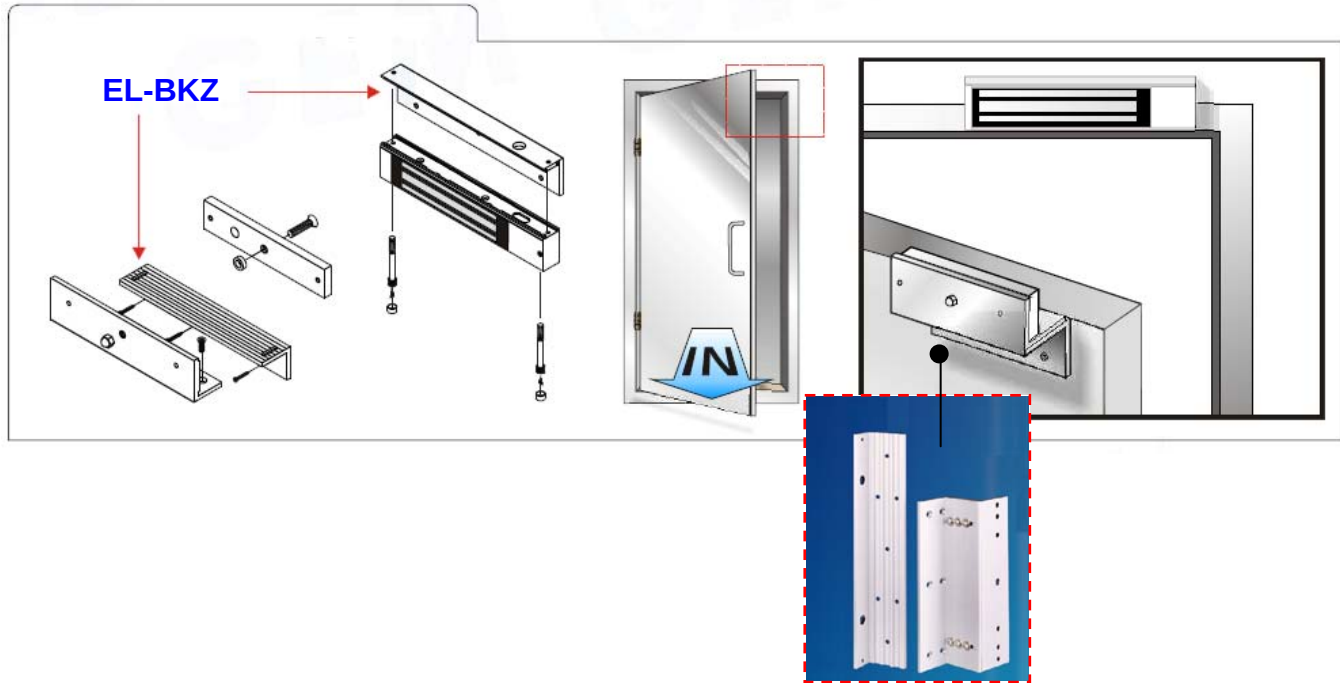

EL-BKU (U Bracket)

- Specially designed for glass door solution
- Available for e-lock-300 & 600 Series

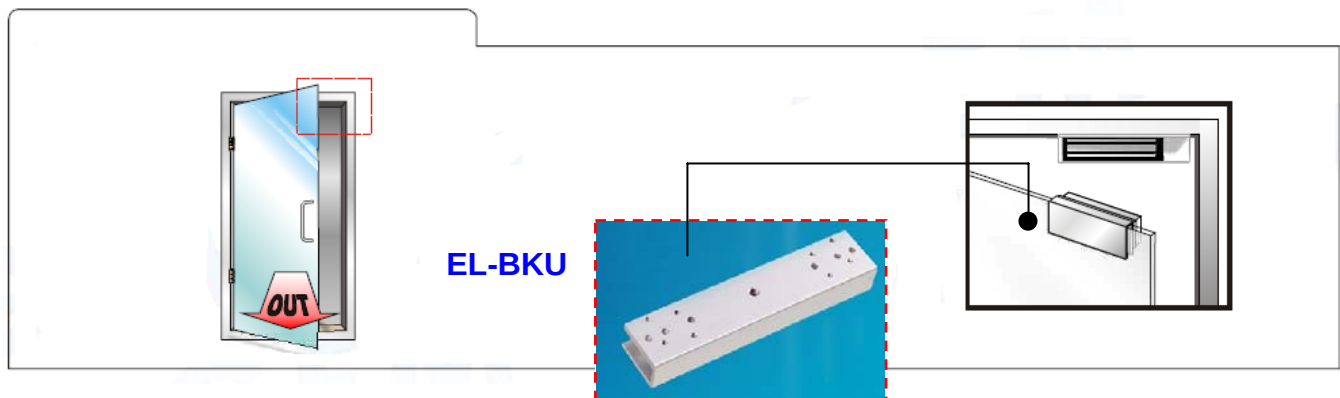

KYODENSHA TECHNOLOGIES (M) SDN BHD


7, Jalan 1/15, Taman Industri Puchong,
Bt 12, Jalan Puchong, Selangor, Malaysia
Tel: +60 3 80613201 Fax: +60 3 80613816
Website: www.e-lock2u.com



Mounting Diagram:

Standard Mounting:

- With Filler Plate attached on top of EM Lock.

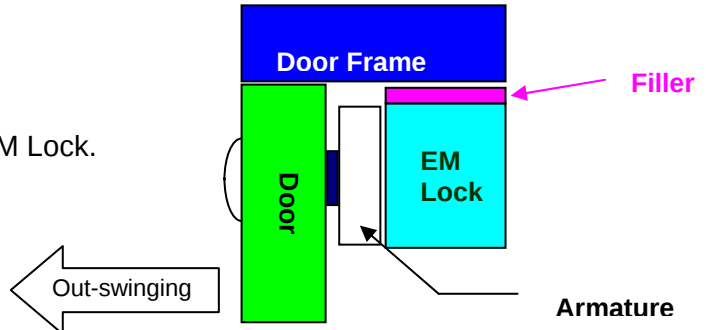


L Bracket Mounting :

- Mounting with "Adjustable L Bracket" when Door frame is narrow.

- Mounting Procedure :-

Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable L Bracket " set.

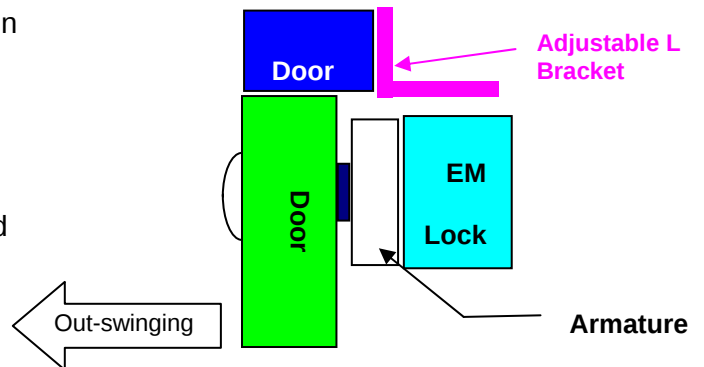


ZL Bracket mounting :

- Mounting with " ZL Bracket " for In-swing door application.

- Mounting Procedure :-

Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable ZL Bracket " set.

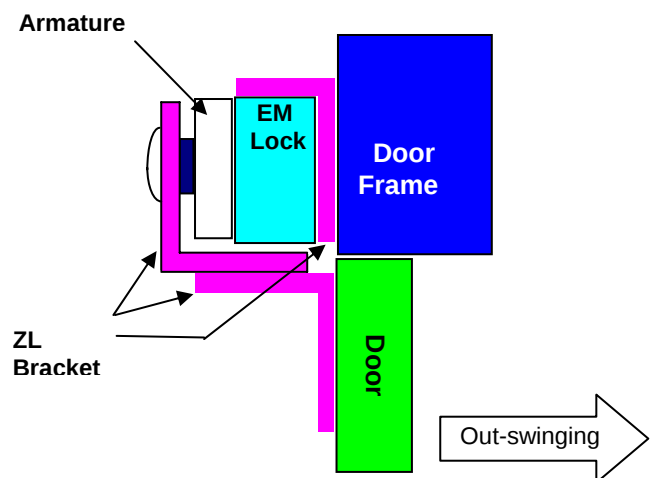

KYODENSHA TECHNOLOGIES (M) SDN BHD

7, Jalan 1/15, Taman Industri Puchong,
 Bt 12, Jalan Puchong, Selangor, Malaysia
 Tel: +60 3 80613201 Fax: +60 3 80613816
 Website: www.elock2u.com

