
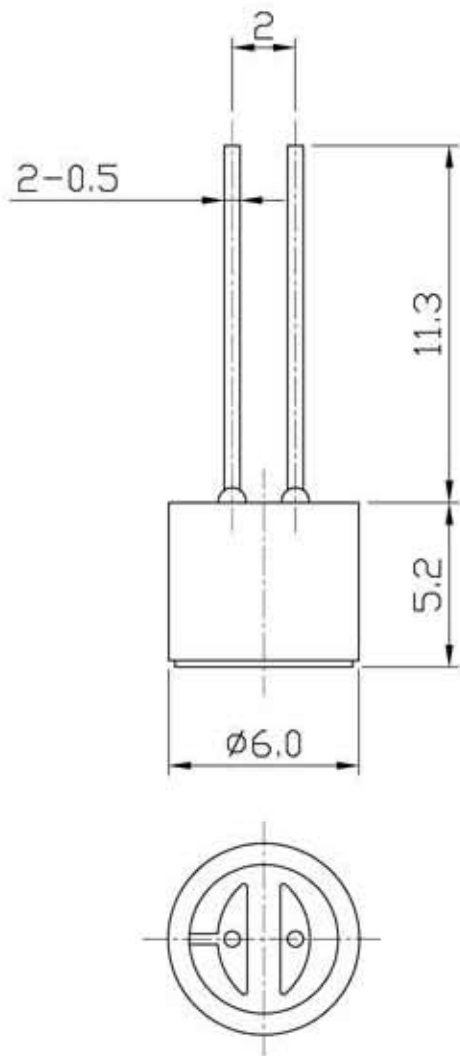




编号 NO.	项目 Items	规格 Specifications
1	额定电压 Rated Voltage	2.0V
2	工作电压 Operating Voltage	1.5V~12V
3	灵敏度 Sensitivity	-58 ± 2dB at 1KHz(0dB=1V/Pa)
4	消耗电流 Current Consumption	0.5mA Max
5	频率范围 Frequency	20Hz~20KHz
6	信噪比 S/N Ratio	≥60dB
7	灵敏度减低 Sensitivity Reduction	within-3dB at 2.0V
8	方向性 Directivity	Omnidirectional
9	测试条件 Testing Condition	2.0V,2.2K Ω
10	壳体材料/颜色 Shell Material/Color	AL/Silver
11	工作温度 Operating Temperature	-25~+55 ℃
12	贮存温度 Store Temperature	-25~+55 ℃
13	重量 Weight	1.5g
备注 Note:	Compliance with ROHS	

TOLERANCES UNLESS NOTED OTHERWISE .X * .XX * .XXX * 90° FORMED +2° ANGLES -1° FIRST ANGLE PROJECTION 	DRAWN		KEPO MODEL NO.		CUSTOMER			
	DESIGN		KPCM-G6B-P		CUSTOMER NO.			
	CHECKED		DWG NO.					
	APPROVED		KP3.841.405R		VER	1.0	SCALE	
	DATE	07.07.05	CONTRACT NO.		UNIT	mm	SHEET	
	AGENCY APPROVAL							