

ViPRO N65

720P Mobile IP Camera




N65 is the Outdoor IP camera specially designed for vehicle monitoring environment with high-speed processor and embedded operation system, combining H.264 video compression and decompression technology, network technology. Featuring high-definition (1280x720) image quality, N65 supports triple streams for better network transmission while its smart design is very convenient for installation and maintenance.

Key Features


- Support 1280x720@30fps HD resolution
- Day/Night(ICR), Digital Noise Filter, Super Wide Dynamic Range, Auto White Light Compensation
- High speed, long distance real time transmission
- Three stream technology, phone monitoring
- IP67 waterproof and dustproof
- Anti-vibration, vandal resistant
- Built-in power loss protection
- PON(DC 12V)
- Support multiple network protocols
- Ideal for vehicle video surveillance

Dimension

(unit: mm)

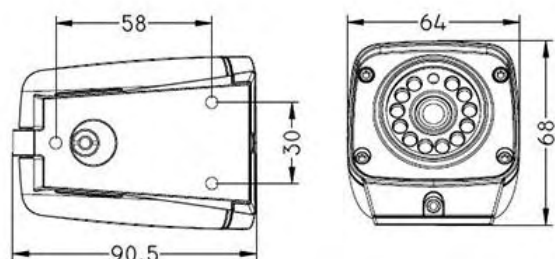

Application

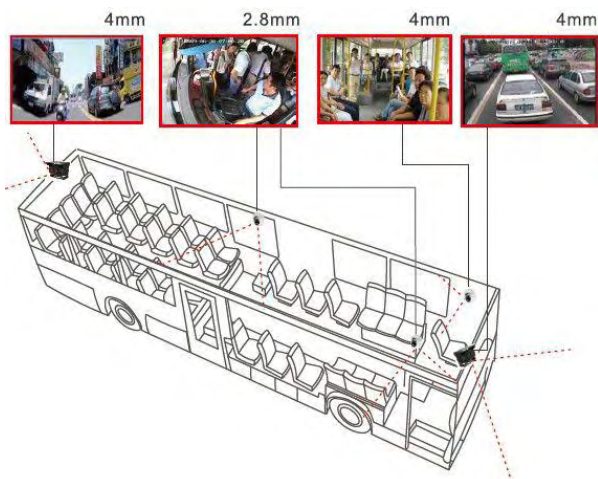

Technical Specifications

Product series		720P Mobile IP Camera	
Video	Model name	N65	
	Image Sensor	1/3" CMOS SONY IMX238	
	Resolution	1280(H)x720(V)	
	Signal System	50/60 Hz	
	Minimum Illumination	0.05Lux(Color Illumination), F1.2	
	Electronics Shutter	1/25 Sec – 1/10000 Sec	
	Day/Night	IR-CUT	
	Wide Dynamic Range	Digital Wide Dynamic Range	
	Backlight Compensation	Support	
	S/N	≥40db	
Optical Lens	Wide Dynamic Range	≥80db	
	IR	<8m	
	Port	6-pin DJ M12(PON)	
	Aperture	Fixed aperture F1.8	
Audio/Video Encode	Lens	2.8mm, 4mm, 6mm, 8mm Optional	
	Video Compression	H.264	
	Compression Output Rate	768Kbps-6144Kbps	
	Image Resolution	Main Stream:720p @30fps, Network Sub Stream:VGA @25fps Record Sub Stream:VGA @ 30fps	
	CBR/VBR	Support	
	Audio compression standard	ADPCM, G.711A, G.711U	
	Network	Maximum Image	1280x720
		Frame	30FPS
		Image Setting	Chroma, contrast, saturation and sharpness
		Protocol	HTTP, TCP, ARP, RTSP, UDP, RTCP, SMTP, DHCP, DNS, DDNS, PPPoE, IPV4, UPnP, NTP
ONVIF		Support	
Client Terminal Preview		Built-in web server, IE browser	
Interface	Audio Input	Support	
	POE	Support	
	Storage	Client Terminal / MDVR	
Physical Characteristic	Power Supply	PON(DC12V)	
	Power	<2w (Day), <3.5w (Night)	
	Waterproof Rating	IP67	
	Working temperature	-40°C~70°C / -40°F~158°F	
	Working humidity	0% to 90%	
	Dimension (L x W x H)	90.5mm x 68mm x 64mm / 3.563" x 2.677" x 2.520"	