




MPEG-4 Video Decoder with Two Way Audio Option

SED-3320



- Up to full D1 MPEG-4 video decompression at 30/25 FPS
- QoS enabled (L3) video streaming
- Dual MPEG-4 video stream input via LAN or WAN (PPPoE supported) ports at the same time
- Digital time code retrieved
- Analog image decoded from up to 16 different ACTi devices can be displayed or set for patrol
- Two way audio supported (for SED-3320 only)

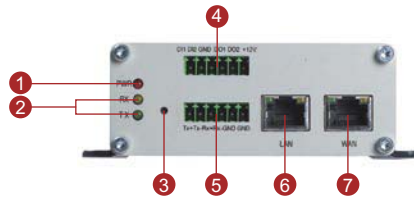


- 1 Power LED
- 2 Serial port LED
- 3 Reset button
- 4 Digital input & digital output
- 5 Serial port & power DC input
- 6 LAN port
- 7 WAN port

SED-3300 Without audio




- 8 Serial port setting
- 9 Audio input / output
- 10 Analog video output (Y/C)
- 11 Analog video output (Composite)

SED-3320 With audio

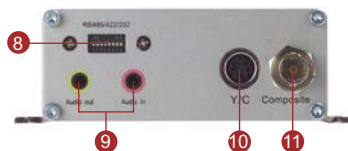


- 8 Serial port setting
- 9 Audio input / output
- 10 Analog video output (Y/C)
- 11 Analog video output (Composite)

DIMENSION DIAGRAM

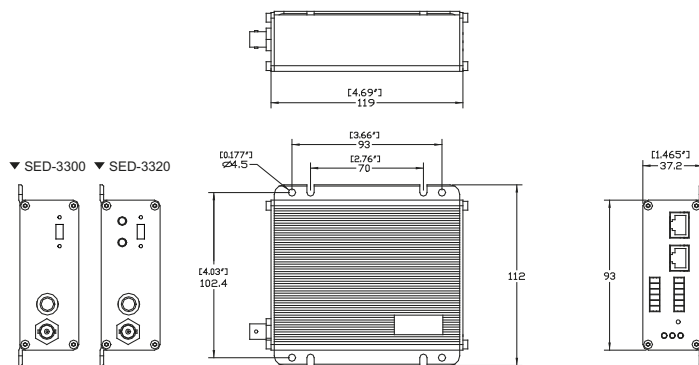

Unit: mm [inch]

**SED-3320****PRODUCT SPECIFICATION**

		SED-3300	SED-3320
Video	Decompression	MPEG-4 ASP decompression	
	Picture Resolution	Full D1 (720 x 480 in NTSC, 720 x 576 in PAL); CIF (352 x 240 in NTSC, 352 x 288 in PAL)	
	Image Frame Rate	30 fps at full D1 resolution (NTSC); 25 fps at full D1 resolution (PAL)	
	Video Output	CVBS, 1.0Vp-p with 75 Ω loading, BNC connector; Y/C, 1.0Vp-p with 75 Ω loading/0.286Vp-p with 75 Ω loading, S video connector	
Audio Input	Compression	N/A	8 kHz, Mono, PCM
	Audio Line Input	N/A	Unbalanced, 1.4 Vp-p, 1Vrms, 3.5 mm Jack
Audio Output	Compression	N/A	8 kHz, Mono, PCM
	Audio Line Output	N/A	Unbalanced, 1.4Vp-p, 1Vrms, 3.5 mm Jack
Alarm	Input	2, TTL, terminal block	
	Output	2, TTL, terminal block	
Remote Control	Serial Port	RS-485: half duplex, terminal block; RS-422: full duplex, terminal block; RS-232: full duplex, terminal block	
External I/O	Reset Button	Factory default	
	LED	System status	
Network	LAN Port	Ethernet(10/100 Base-T), RJ-45 connector	
	WAN Port	Ethernet(10/100 Base-T), RJ-45 connector	
	Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP	
Software	Web Browser	Microsoft Internet Explorer 6.0 or above	
	SDK	ActiveX control, C SDK	
	Security	Password Protection : configured by the administrator	
Operating	Temperature	5 °C ~ 50 °C (40 °F ~ 122 °F)	
Power	Power Requirement	DC 12 V ±10%	
	Power Consumption	7.5 W	
Physical	Dimensions (WxHxD)	112 mm x 37.2 mm x 119 mm (4.41" x 1.46" x 4.68")	
	Weight	350 g (0.66lb)	

ORDERING INFORMATION

Model Name	w/ Audio	w/o Audio
SED-3300		V
SED-3320	V	